
15" COMPACTORS

(BASE UNIT TC607 REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)


TC707 - 15" x 341/8" x 261/4"

TC607 - 15" x 341/8" x 261/2"

PRODUCT DIMENSIONS



FRONT VIEW



TOP VIEW

MODEL#		TC707		TC607	
		in	cm	in	cm
A	Width of drawer	15	38.0	15	38.0
В	Height to top of handle Euro-Style Stainless	261/8	68.2	26%	68.2
	Pro-Style® Stainless panel kit	_	_	27	68.6
		44.6	400	447	400
D	Height of toe plate	41//8	10.6	41/8	10.6
\mathbf{E}	Depth without drawer	23	58.3	23	58.3
F	Depth with drawer Euro- Style Stainless	243/8	61.7	_	_
	Pro-Style® Stainless panel kit	_	_	24%	61.7
G	Depth with handle Euro- Style Stainless	261/4	66.7	_	_
	Pro-Style® Stainless panel kit	_	_	267/8	68.3
Н	Depth with drawer fully open including handle Euro-Style Stainless	44	111.5		
	Pro-Style® Stainless panel kit	_	_	44%	113.4


15" COMPACTORS

(BASE UNIT TC607 REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

TC707 - 15" x 341/8" x 261/4"

TC607 - 15" x 341/8" x 261/2"

DIMENSIONS AS INSTALLED

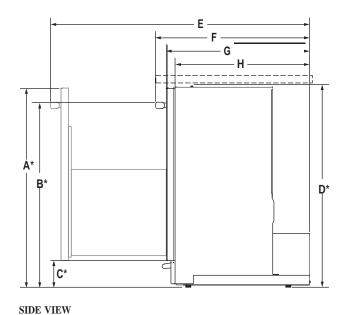

MODEL#		TC707		TC607		
		in	cm	in	cm	
A *	Height to top of drawer (min.)	33¾	85.7	33¾	85.7	
В*	Height to top of handle (min.) Euro-Style (color-coordinating)	31%	79.6	31%	79.6	
	Pro-Style® Stainless	_	_	31½	80.0	
C*	Height to bottom of drawer (min.)	4½	11.4	4½	11.4	
D*	Height of recessed compactor (min.)	341/8	86.7	341/8	86.7	
E	Depth with drawer fully open including handle (min.) Euro-Style Stainless	44	111.5	_	_	
	Pro-Style® Stainless panel kit	_	_	445/8	113.4	
F	Depth with handle (min.) Euro-Style Stainless	261/4	66.7	_	_	
	Pro-Style® Stainless panel kit	_	_	26%	68.3	
G	Depth with drawer (min.) Euro-Style Stainless	24%	61.7	_	_	
	Pro-Style® Stainless panel kit	_	_	24%	61.7	
Н	Depth without drawer (min.)	23	58.3	23	58.3	
*Add up to ½" (1.3 cm) to height with leg levelers fully extended.						

^{*}Add up to ½" (1.3 cm) to height with leg levelers fully extended.


15"COMPACTORS

(BASE UNIT TC607 REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)


TC707 - 15" x 341/8" x 261/4"

TC607 - 15" x 341/8" x 261/2"

OPENING/CLEARANCE DIMENSIONS



FRONT VIEW




SIDE VIEW

MODEL#		TC707 TC607	
		in	cm
A	Width (min.)	151⁄4	38.7
В	Electrical outlet – distance from left- or right-hand side (min.)	3	74.6
C	Clearance required for bag removal – right-hand side (min.)	6	15.2
D	Height (min.)	341⁄4	87.0
E	Electrical outlet – distance from floor (min.)	18	45.7
F	Clearance required for drawer removal (min.)	23	58.4
G	Depth (min.)	24	61.0
е	Recommended electrical connection location (left or right-hand side)		

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



BACK VIEW