




Réfrigérateur à congélateur inférieur avec d'un tiroir congélateur - 30 po - 19 pi cu

WRB329RFBM

Finis/couleurs disponibles

	WRB329RFBM Acier inoxydable Monochrome
---	---

Dimensions

Profondeur	33 3/8
Hauteur	67
Largeur	29 3/4

Volumes AHAM et tablettes

Volume du congélateur (pi3)	5.73
Volume du réfrigérateur (pi3)	12.94

AHAM Volumes And Shelf Area

Refrigerator Volume (Cu Ft)	12.94
-----------------------------	-------

Distributeur

Largeur(IN, inches)	29 3/4
Type de glaçons	Non

Contrôles

Type de contrôle	Commandes électroniques
------------------	-------------------------

GDS

isBaseUnit	Vrai
isConsumerUnit	Vrai
IsDispatchUnit	.
IsInvoiceUnit	Vrai
IsOrderableUnit	Vrai
Product Type	EA
GPC Code	10003695
UDEX	1101290375

Extérieur

Couleur de la caisse	Gris
Fini de la caisse	Texturé
Couleur de la porte	Acier inoxydable
Fini de la porte	Lisse
Couleur de la poignée	Acier inoxydable

Vous pouvez facilement ranger tous vos aliments frais ou congelés dans ce réfrigérateur à congélateur inférieur d'une capacité de 19 pi cu. Grâce au tiroir du congélateur, les aliments surgelés sont à portée de la main, faciles à organiser et à repérer. Conservez vos aliments préférés à la température idéale sans gaspiller de l'énergie grâce au système de gestion de la température Accu-Chill™. Des capteurs intégrés mesurent la température intérieure et n'activent le compresseur qu'au besoin seulement. Les ampoules éconergétiques à DEL projettent un éclairage plus naturel sur les aliments, tandis que le conservateur de fruits et légumes FreshFlow™ prolonge la durée de fraîcheur des aliments jusqu'à 4 jours et en conserve la saveur.



Caractéristiques clés

Système de gestion de la température Accu-Chill™

Éclairage intérieur à DEL

Conservateur de fruits et légumes FreshFlow™

Guides et documentation:

 [Dimension Guide](#)  [Energy Guide](#)

 [Owner Manual](#)  [Warranty Information](#)

Whirlpool® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRB322

WRB329

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

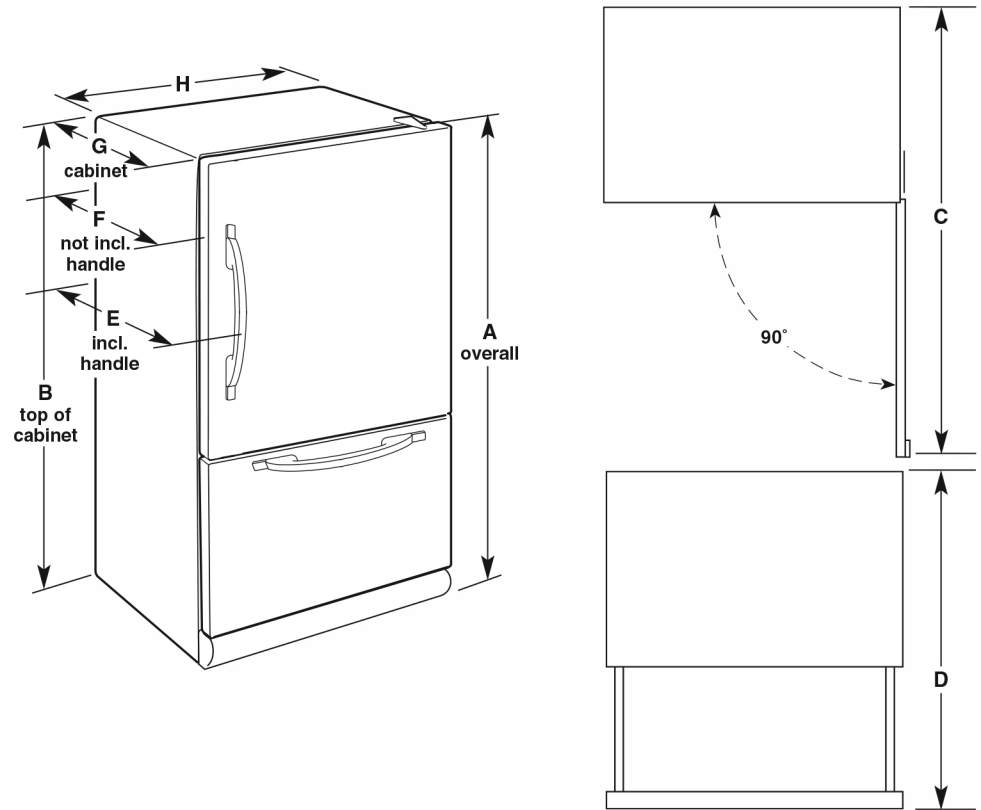

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
WRB322	22.1 cu. ft.	70" (177.8 cm)	68½" (174 cm)	62" (157.5 cm)	50¾" (128.9 cm)	33¾" (84.8 cm)	30¾" (78.4 cm)	28½" (71.4 cm)	32¾" (82.9 cm)
WRB329	18.7 cu. ft.	67" (170.2 cm)	65½" (166.4 cm)	59" (149.9 cm)	50¾" (128.9 cm)	33¾" (84.8 cm)	30¾" (78.4 cm)	28½" (71.4 cm)	29¾" (75.2 cm)

LOCATION REQUIREMENTS

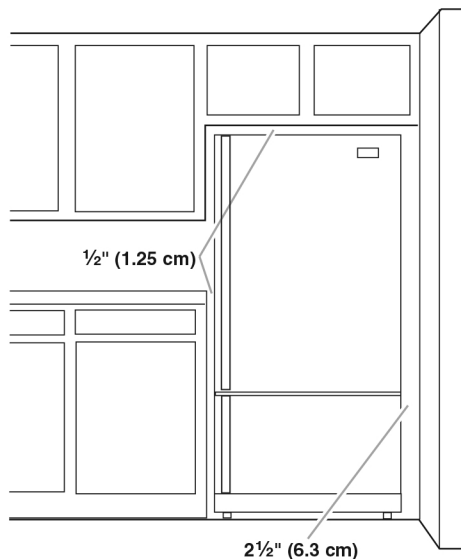

To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each side and at the top. Allow at least 1" (2.54 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave ½" (6.3 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.