



Maytag® 30-inch Bottom Freezer Refrigerator with Freezer Drawer

MBL1957FEZ

Available Finishes/Colours



MBL1957FEZ
FingerPrint Resistant
Stainless Steel

Tough enough for any kitchen, a Maytag® 30-inch bottom freezer refrigerator with sliding freezer drawer is built for the long haul. stainless steel handles give you something hearty to hold onto. A 10-year limited parts warranty* on the compressor lets you know this 2-door refrigerator will hold all your food for years to come. BrightSeries™ LED lighting and frameless glass shelves add a premium look and feel. Humidity controlled FreshLock™ crispers help keep foods fresh. Best of all, this 30-inch refrigerator is designed, engineered and assembled in the U.S.A. And it's ENERGY STAR® qualified so you know it will help you save on utility bills.

Top Features

Fingerprint Resistant Stainless Steel

10-Year Limited Parts Warranty on the Compressor

Stainless Steel Handles

Manuals & Literature:



[Dimension Guide](#)



[Energy Guide](#)



[Owners Manual](#)



[Warranty Information](#)

Dimensions		Exterior	
Depth	33.38	Door Finish	Smooth
Height	67.0	Door Opening	Left Swing
Width	29.63	Door Style	Flat
Freezer Compartment		Hidden Hinge	No
		Number Of Doors	2
		Reversible Door	No
		Handle Color	Stainless Steel
		Handle Material	Metal
Freezer Drawer Basket	1 Full Width Lower Wire; 1 Full Width Upper Wire	Handle Type	Reach Through Handle
Door Bins	No	Filters	
Door Type	Pull-Out		
Light	Yes	Fresh Flow Air Filter Included	No
Dispenser		Produce Preserver	Yes
		Exterior	
Types Of Ice	N/A		
Dispenser Type	N/A		
Base Grille Color	Grey	Cabinet Color	Grey
Cabinet Color	Grey	Cabinet Finish	Textured





Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

MBL1957FE

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."


Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply:


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

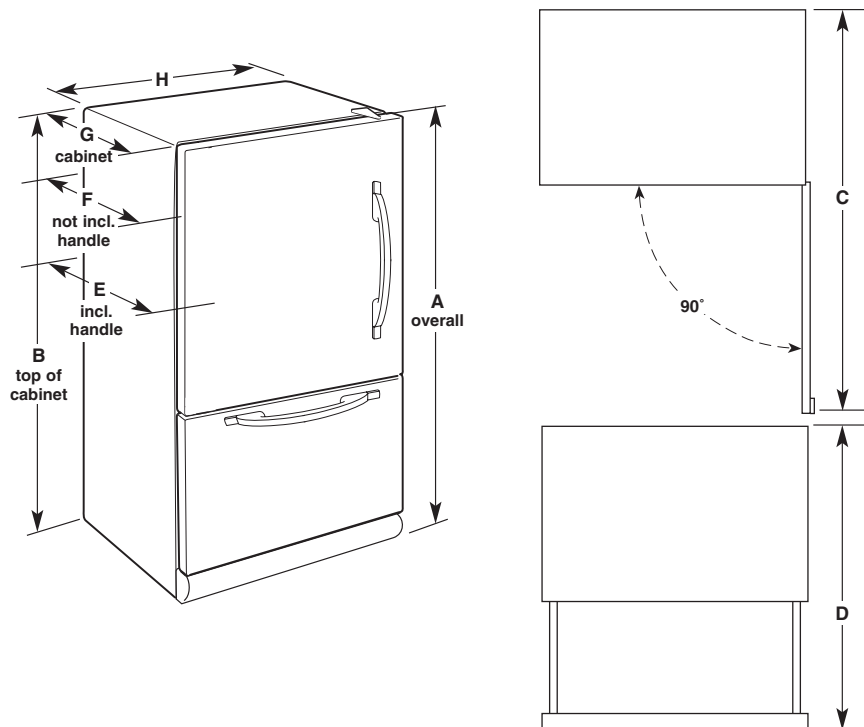

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
MBL1957FE	18.7 cu. ft.	67" (170.2 cm)	65½" (166.4 cm)	59" (149.9 cm)	50¾" (128.9 cm)	33¾" (84.8 cm)	30⅞" (78.4 cm)	28⅛" (71.4 cm)	29⅝" (75.2 cm)

LOCATION REQUIREMENTS

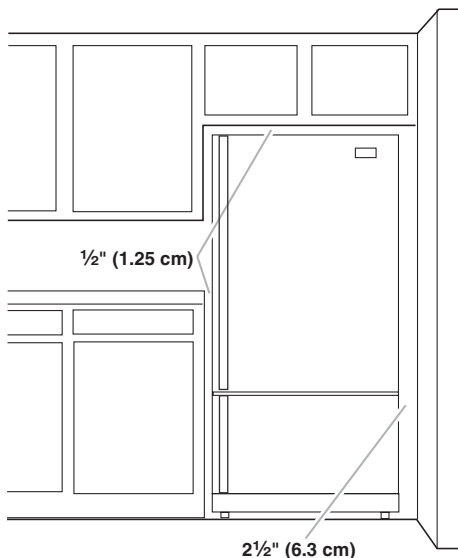

To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each side and at the top. Allow at least 1" (2.54 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2½" (6.3 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).