



Maytag® 30-Inch Wide French Door Refrigerator with Exterior Water Dispenser- 20 Cu. Ft.

MFW2055FRZ

Available Finishes/Colours



MFW2055FRZ
FingerPrint Resistant
Stainless Steel

This Maytag® french door refrigerator is made with heavy-duty components and features that deliver the right kind of cold exactly where it's needed. It's available in FingerPrint Resistant Stainless Steel to keep this fridge looking as good on the outside as it works on the inside. The temperature-controlled Wide-N-Fresh™ deli drawer provides the perfect place to keep deli items so they stay fresh longer. And when it comes to durability, this french door refrigerator has stainless steel handles to give you something hardy to grab on to, while the 10-year limited parts warranty on the compressor means you can count on it hold the cold for years.

Top Features

Fingerprint Resistant Stainless Steel

Temperature-controlled Wide-N-Fresh™ deli drawer

BrightSeries™ LED Lighting

Manuals & Literature:



[Dimension Guide](#)



[Energy Guide](#)



[Owners Manual](#)



[Warranty Information](#)

Dimensions		Exterior	
Depth	34.38	Reversible Door	N/A
Height	68.38	Handle Color	Stainless Steel
Width	30.13	Handle Material	Stainless Steel
Freezer Compartment		Handle Type	Reach Through Handle
Freezer Drawer Basket	1 Full Width Lower Plastic; 1 Full Width Upper Plastic	Filters	
Door Type	Pull-Out	Fresh Flow Air Filter Included	Yes
Light	Yes	Produce Preserver	Yes
Exterior		Water Filter Location	Interior
Base Grille Color	Grey	Water Filter Part Number	EDR1RXD1
Cabinet Color	Grey	Dispenser	
Cabinet Finish	Textured	Dispenser Type	Exterior Water Only
Door Finish	Smooth		
Door Style	Contour		
Hidden Hinge	Yes		
Number Of Doors	3		





Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

MFW2055DR MFW2055YE
MFW2055FR

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

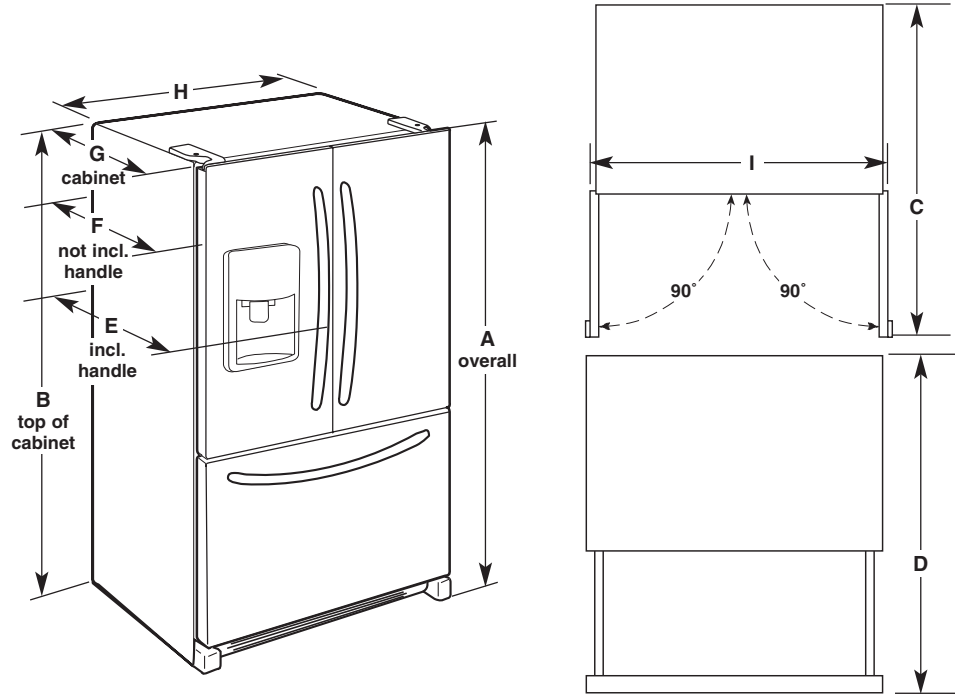

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
MFW-2055DR	19.7 cu. ft.	68 ³ / ₈ " (173.7 cm)	67 ¹ / ₂ " (171.5 cm)	44 ¹ / ₈ " (112.1 cm)	52 ¹ / ₂ " (133.4 cm)	34 ³ / ₄ " (88.3 cm)	32 ¹ / ₄ " (81.9 cm)	28" (71.1 cm)	30" (76 cm)	33 ¹ / ₄ " (84.5 cm)
MFW-2055YE	19.6 cu. ft.	68 ¹ / ₂ " (174 cm)	67 ¹ / ₂ " (171.5 cm)	43 ⁵ / ₈ " (110.8 cm)	51 ¹⁵ / ₁₆ " (131.9 cm)	34 ³ / ₄ " (88.3 cm)	31 ¹¹ / ₁₆ " (80.5 cm)	27 ⁷ / ₈ " (70.8 cm)	29 ¹ / ₂ " (74.9 cm)	33" (83.8 cm)
MFW-2055FR	19.7 cu. ft.	68 ³ / ₈ " (173.7 cm)	67 ¹ / ₂ " (171.5 cm)	44 ¹ / ₈ " (112.1 cm)	52 ¹ / ₂ " (133.4 cm)	34 ³ / ₈ " (87.3 cm)	32 ¹ / ₄ " (81.9 cm)	28" (71.1 cm)	30" (76 cm)	33 ¹ / ₄ " (84.5 cm)

LOCATION REQUIREMENTS

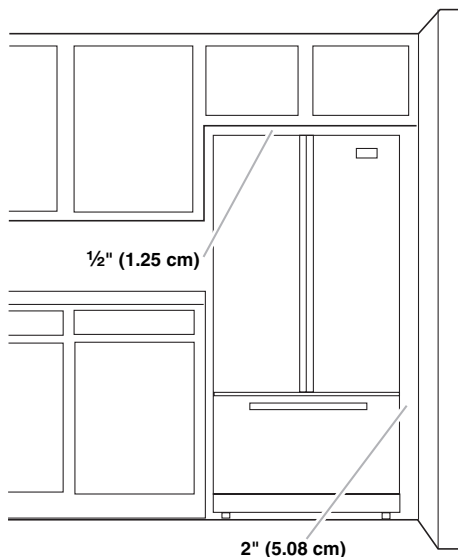

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator..