



Whirlpool® 33-inch Wide Side-by-Side Refrigerator - 22 cu. ft.

WRS312SNHM

Available Finishes/Colours



WRS312SNHB
Black



WRS312SNHM
Fingerprint-Resistant
Stainless Finish



WRS312SNHW
White

Fit and find it all with purposefully-designed storage spaces in this side-by-side refrigerator. Get increased loading flexibility when and where you need it using adjustable gallon door bins. The refrigerator with LED lights also keep food looking as good as it tastes.

Top Features

Adjustable Gallon Door Bins

LED Interior Lighting

Hidden Hinges

Manuals & Literature:



[Dimension Guide](#)



[Energy Guide](#)



[Installation Instruction](#)



[Owners Manual](#)



[Warranty Information](#)

Dimensions		Exterior	
Depth	33.63	Number Of Doors	2
Height	66.63	Reversible Door	No
Width	32.75	Handle Color	Stainless Steel
Freezer Compartment		Handle Material	Metal
		Handle Type	Reach Through Handle
		Filters	
Shelves	4 Fixed Full-Width Wire	Fresh Flow Air Filter Included	No
Door Bins	4 Fixed Full-Width	Produce Preserver	No
Door Type	Swing	Icemaker	
Freezer Drawer Basket	1 Full Width Lower Plastic	Icemaker	No / Optional Accessory
Freezer Number Of Shelves	4 Fixed Full-Width Wire	Icemaker Location	Freezer
Light	Yes	Refrigerator Compartment	
Exterior		Conventional Shelves	1 Fixed Full-Width Glass; 3 Adjustable Full-Width Glass
Cabinet Color	Grey		
Base Grille Color	Grey		
Cabinet Finish	Textured		
Door Finish	Smooth		
Door Style	Contour		
Hidden Hinge	Yes		

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS


WRS315SDH*	WRS315SNH*
WRS312SNH*	WRS335SDH*
WRS331SDH*	WRS311SDH*
WRS321SDH*	WRS555SIH*
WRS315SNH*	WRS325SDH*

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

LOCATION REQUIREMENTS

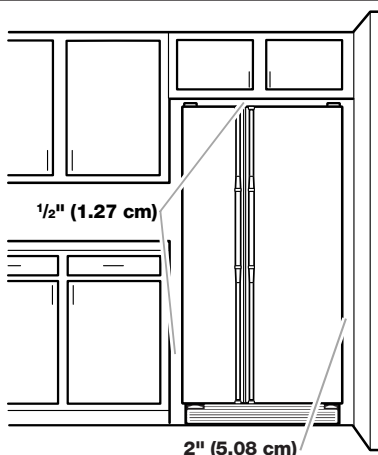


To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cutout width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.

PRODUCT DIMENSIONS

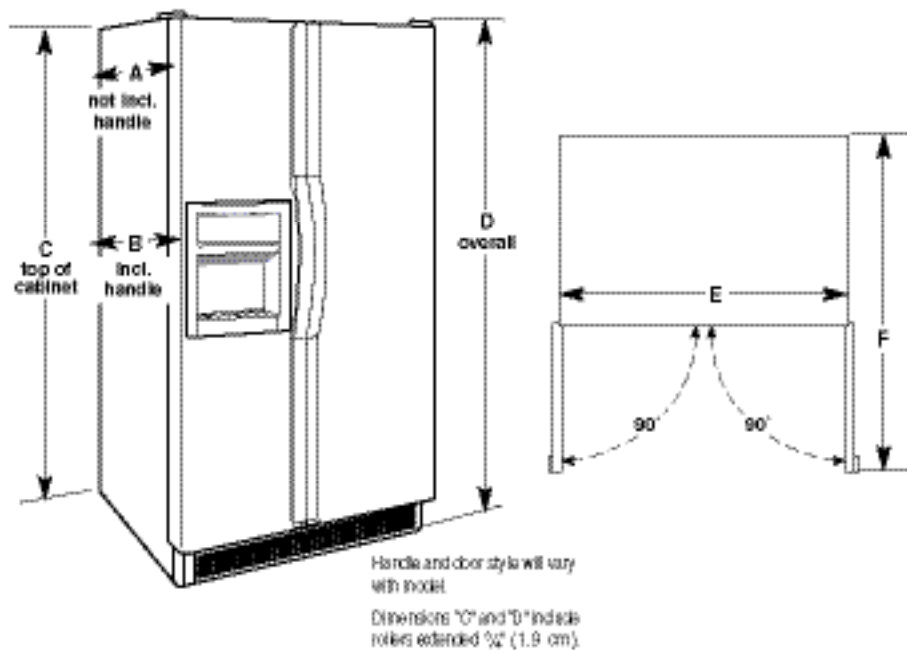

Model Number/ Capacity	Depth Without Handles "A"	Depth With Handles "B"	Height to top of Cabinet "C"	Overall height "D"	Cabinet Width "E"	Depth with Doors Open 90° "F"
WRS315SDH* 24.57 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS315SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS312SNH* 21.55 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS335SDH* 24.54 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	66 $\frac{5}{8}$ " (169.23 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS311SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS321SDH* 21.40 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS555SIH 24.51 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{1}{2}$ " (90.18 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRSA15SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS331SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS325SDH* 22.50 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)