



Whirlpool® 33-inch Wide Side-by-Side Refrigerator - 21 cu. ft.

WRS321SDHW

Available Finishes/Colours



WRS321SDHB
Black



WRS321SDHW
White



WRS321SDHV
Black Stainless



WRS321SDHZ
Fingerprint-Resistant
Stainless Finish

Get purposefully-designed storage spaces for items you use most in this side-by-side refrigerator. An in-door can caddy frees up shelf space while frameless glass shelves in the refrigerator with ice and water dispenser lets you store more items on each shelf for loading flexibility. The deli drawer refrigerator gives you plenty of space to store meat and cheese, too.

Top Features

Can Caddy

Frameless Glass Shelves

Adjustable Gallon Door Bins

Manuals & Literature:



[Dimension Guide](#)



[Energy Guide](#)



[Owners Manual](#)



[Warranty Information](#)

Dimensions		Exterior	
Depth	33.75	Reversible Door	No
Height	66.63	Base Grille Color	White
Width	32.75	Handle Color	White
Freezer Compartment		Handle Type	Reach Through Handle
Light	Yes	Filters	
Door Bins	3 Fixed Full-Width	Fresh Flow Air Filter Included	No
Door Type	Swing	Produce Preserver	No
Freezer Drawer Basket	1 Full Width Lower Plastic	Water Filter Location	Exterior
Freezer Number Of Shelves	3 Adjustable Full-Width Glass	Water Filter Part Number	EDR1RXD1
Shelves	3 Adjustable Full-Width Glass	Icemaker	
Exterior		Icemaker	Yes
Cabinet Color	White	Icemaker Location	Freezer
Door Finish	Smooth	Refrigerator Compartment	
Door Style	Contour	Conventional Shelves	1 Fixed Full-Width Glass; 3 Adjustable Full-Width Glass
Hidden Hinge	Yes		
Number Of Doors	2		

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS


WRS315SDH*	WRS315SNH*
WRS312SNH*	WRS335SDH*
WRS331SDH*	WRS311SDH*
WRS321SDH*	WRS555SIH*
WRS315SNH*	WRS325SDH*

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

LOCATION REQUIREMENTS

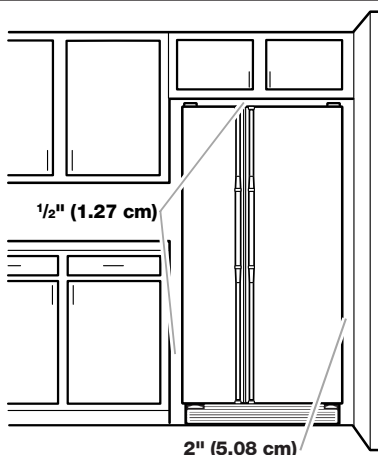


To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cutout width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.

PRODUCT DIMENSIONS

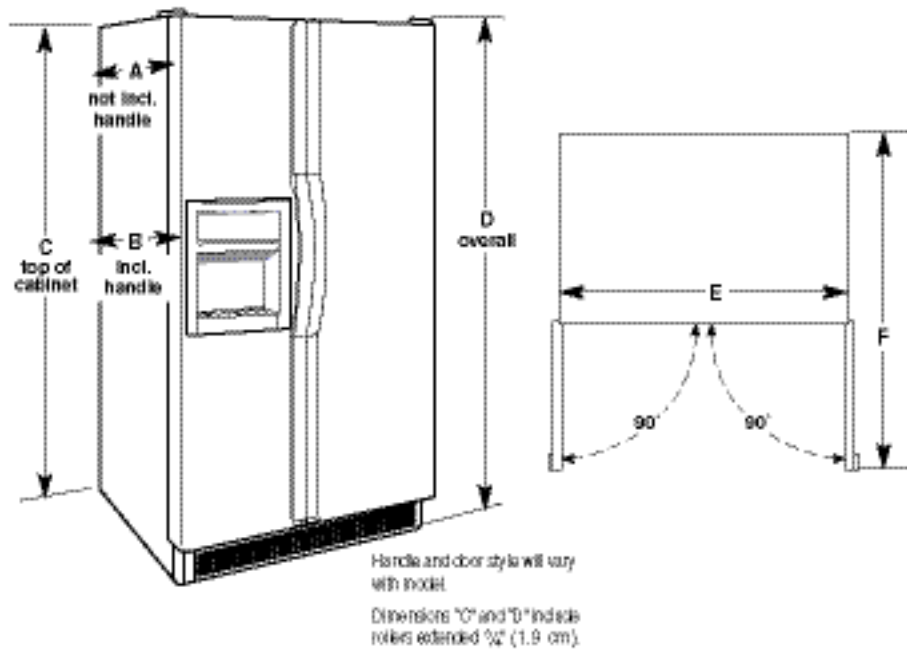

Model Number/ Capacity	Depth Without Handles "A"	Depth With Handles "B"	Height to top of Cabinet "C"	Overall height "D"	Cabinet Width "E"	Depth with Doors Open 90° "F"
WRS315SDH* 24.57 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS315SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS312SNH* 21.55 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS335SDH* 24.54 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	66 $\frac{5}{8}$ " (169.23 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS311SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS321SDH* 21.40 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS555SIH 24.51 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{1}{2}$ " (90.18 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRSA15SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS331SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS325SDH* 22.50 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)