

Integrated Column Freezer 18" - Panel ready (white interior)



Selected Model	
Model number	RS1884FLJ1
Dimensions	
Overall Width (in.)	17 3/4"
Depth (in.)	24"
Overall Height (in.)	84"
Exterior Appearance	
Door Design	Custom Panel Ready
	EZKleen™ Stainless Steel
Built-in	Yes
Seamless Cabinetry Installation	Integrated into kitchen cabinetry
Counter-Depth	Yes
Frontage Color	Custom Panels
Concealed Hinges	Yes
Model	
Model	RS1884FLJ1
Features	
Configuration	Single door integrated freezer column
Performance	3 freezing mode + 2 independent freezing zones
Temperature Management System	ActiveSmart™
Door swing	Left
Interior Lighting	LED, top and sides
Sabbath Mode	Yes
Icemaker acces	Freezer Compartment
Door opening angle	90° to 115°
SmartTouch™ Control Panel	Interior, central
Icemaker	Factory-Installed
Automatic closing bins	Yes
Child lock	Yes
Water Filtration	Yes
Water Filter acces	Behind the venting grid
Capacity	
Total Capacity	7.8 cu.ft
Interior Appearance	
Door Wrappers	White
Back Glass	Silver
ActiveSmart™	
Compressor Type	Variable
Defrost Type	Variable
Door Alarm	Yes
Multiflow Air System	Yes
Air Fan Management	Variable speed
Electrical Requirements	
Energy Consumption	ENERGY STAR 415 kWh per year
Volts; Hertz; Amps	115V; 60Hz; 10 Amp
Accessories (Included)	
Joiner kit (Grey)	AJ-RS84LR (Grey)
Accessories (optional)	
Contemporary Round Stainless Steel Handle	AHS-RD84
Contemporary Series Square Stainless Steel Handle	AHD3-RD84 AHD5RDSF (Thin SS) AHD5RDSFB (Thin SS black)
PRO Round Stainless Steel Handle	AHC-RD84 AHP3RDSF (SS, Brushed endcap)
PRO Series Square Stainless Steel Handle	AHV2-RD84
Accessories (required)	
EZKleen™ Stainless steel door panel	RD1884L4D
Warranty	
Full 2 years	Entire Appliance; In-Home; Parts & Labour
5 years warranty	Sealed system (parts only)

FISHER & PAYKEL

DATA SHEET 18" Integrated Column Freezer


Model nos:

RS1884FRJ1 / RS1884FRJK1
with Stainless Steel Door panel RD1884R4D, Handle AHD3-RD84
and Stainless Steel Toekick Panel AKRS18041

NOTE: Left hand hinge model is a mirrored version of image shown.

RS1884FLJ1 / RS1884FLJK1
with Stainless Steel Door panel RD1884L4D, Handle AHD3-RD84
and Stainless Steel Toekick Panel AKRS18041

(refer page 2 for metric measurements)

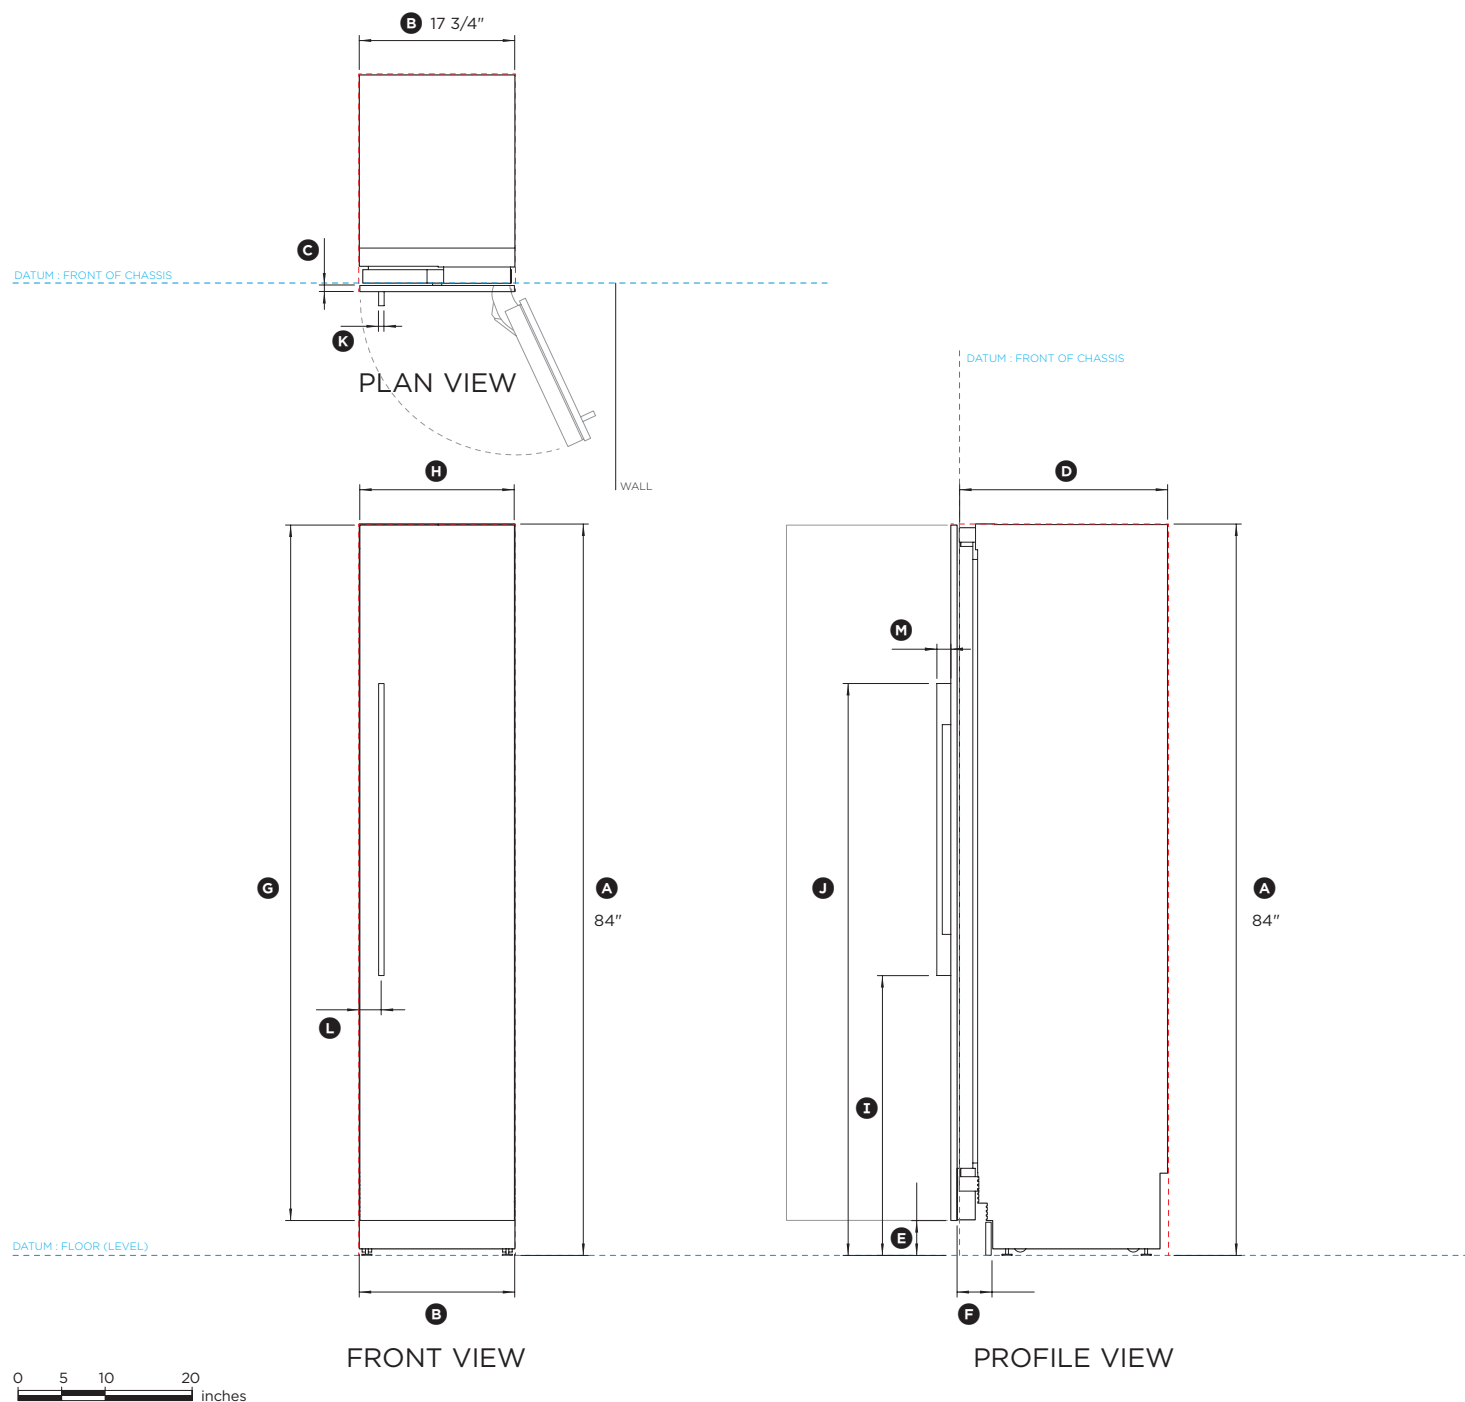

Product Dimensions	in
Ⓐ Overall height of product	84"
Ⓑ Overall width of product	17 3/4"
Ⓒ Depth of product front panels (excl. handles)	3/4"
Ⓓ Overall depth of product (excl. front door panels)	24"
Ⓔ Height from bottom datum to bottom of door	4"
Ⓕ Depth of toekick (excl. door front and toekick panels)	2 11/16" - 4"
Ⓖ Height of door panel	79 7/8"
Ⓗ Width of door panel	17 3/4"
Ⓢ Height from bottom datum to bottom of handle	32 1/8"
Ⓣ Height from bottom datum to top of handle	65 11/16"
Ⓚ Thickness of handles	5/8"
Ⓛ Distance from side of fridge to the center of handle	2 1/2"
Ⓜ Depth of handle (measured from front of door)	1 5/8"

Clearance Dimensions	in
Minimum cabinetry gap clearance from edge of door panel	1/8"
Overall height of cavity	84"
Overall width of cavity	18"
Minimum depth of cavity	25"
Minimum door clearance to adjacent wall (115° - full internal access)	11 1/2"
Minimum door clearance at 90° open, measured from front of door	20"

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 18" Integrated Column Freezer

Model nos:

RS1884FRJ1 / RS1884FRJK1
with Stainless Steel Door panel RD1884R4D, Handle AHD3-RD84
and Stainless Steel Toekick Panel AKRS18041

NOTE: Left hand hinge model is a mirrored version of image shown.

RS1884FLJ1 / RS1884FLJK1
with Stainless Steel Door panel RD1884L4D, Handle AHD3-RD84
and Stainless Steel Toekick Panel AKRS18041

(refer page 1 for imperial measurements)


Product Dimensions	mm
Ⓐ Overall height of product	2134
Ⓑ Overall width of product	451
Ⓒ Depth of product front panels (excl. handles)	19
Ⓓ Overall depth of product (excl. front door panels)	610
Ⓔ Height from bottom datum to bottom of door	102
Ⓕ Depth of toekick (excl. door front and toekick panels)	68 - 101
Ⓖ Height of door panel	2029
Ⓗ Width of door panel	451
Ⓘ Height from bottom datum to bottom of handle	816
Ⓢ Height from bottom datum to top of handle	1668
Ⓚ Thickness of handles	16
Ⓛ Distance from side of fridge to the centre of handle	64
Ⓜ Depth of handle (measured from front of door)	41

Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of door panel	3
Overall height of cavity	2134
Overall width of cavity	457
Minimum depth of cavity	635
Minimum door clearance to adjacent wall (115° - full internal access)	292
Minimum door clearance at 90° open, measured from front of door	508

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 03.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

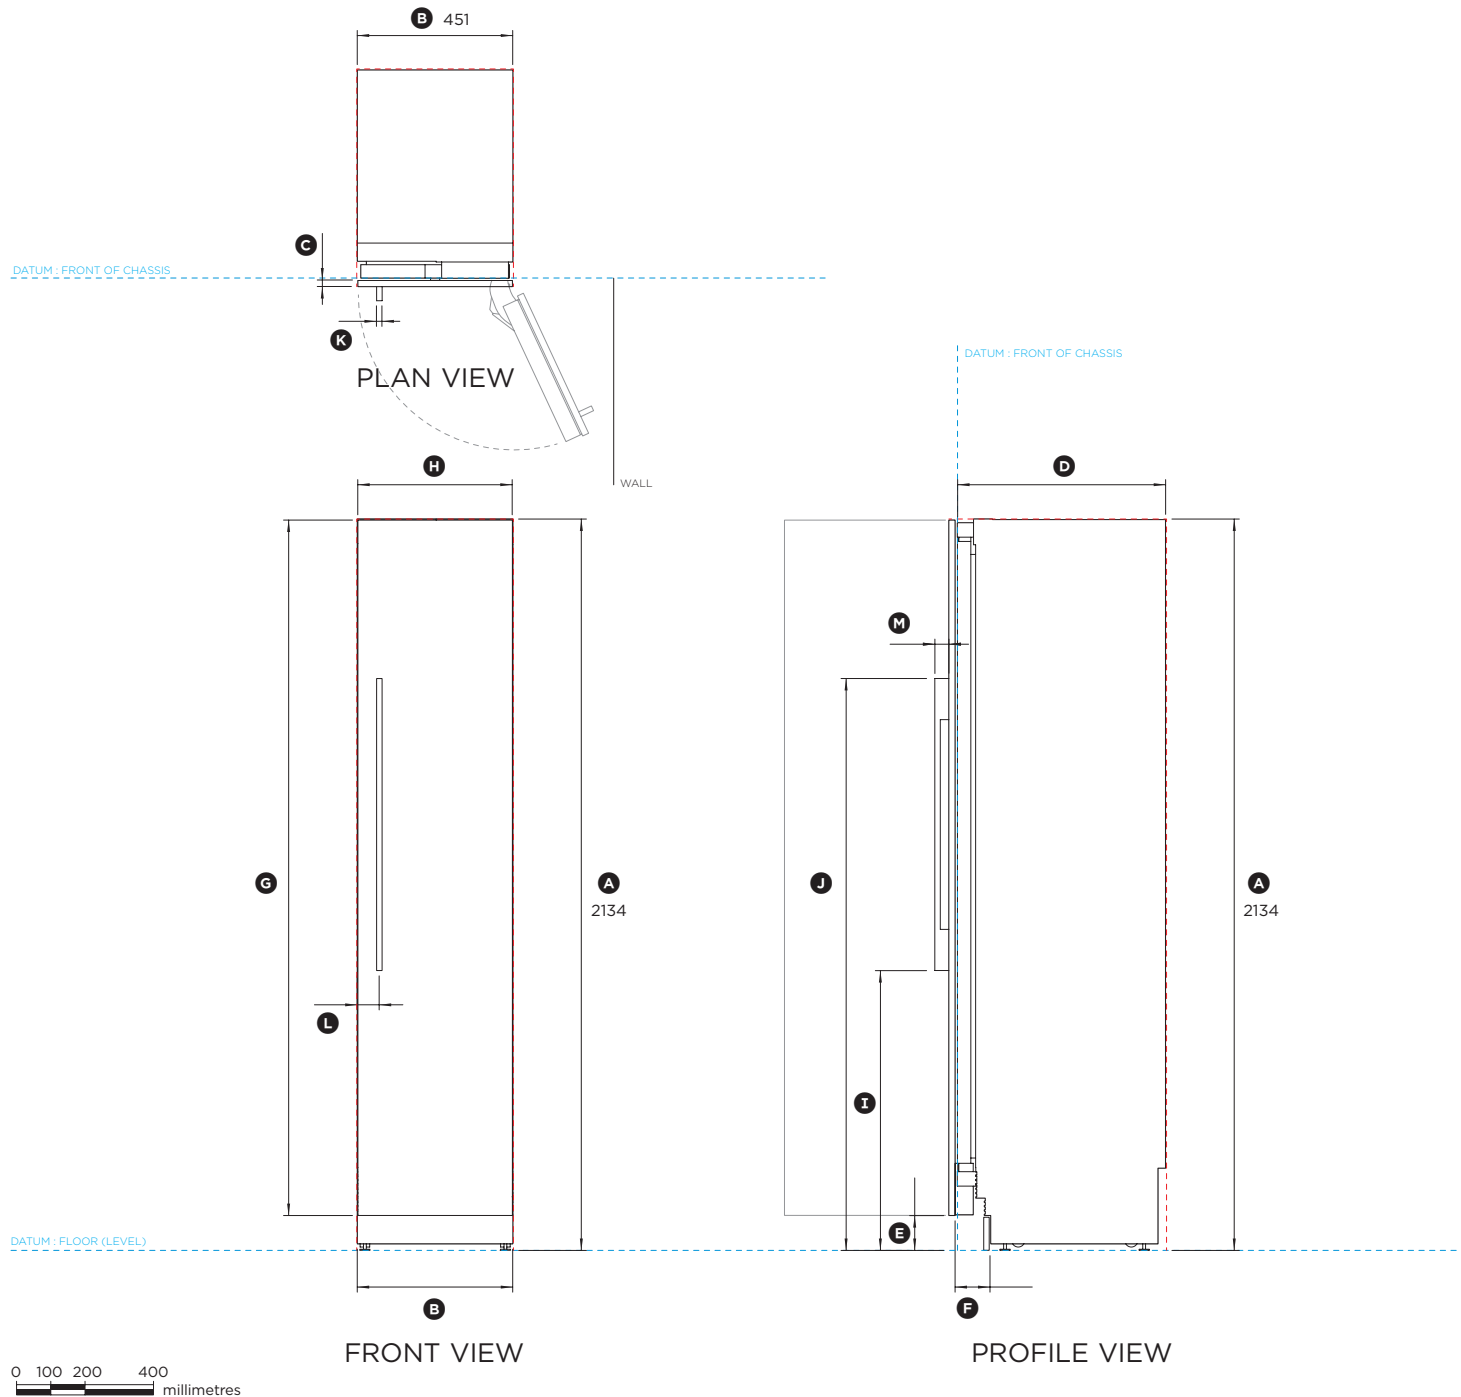

FISHER & PAYKEL

DATA SHEET 18" Integrated Column Freezer


Model nos:

RS1884FRJ1 / RS1884FRJK1

NOTE: Left hand hinge model is a mirrored version of image shown.

RS1884FLJ1 / RS1884FLJK1

(refer page 2 for metric measurements)

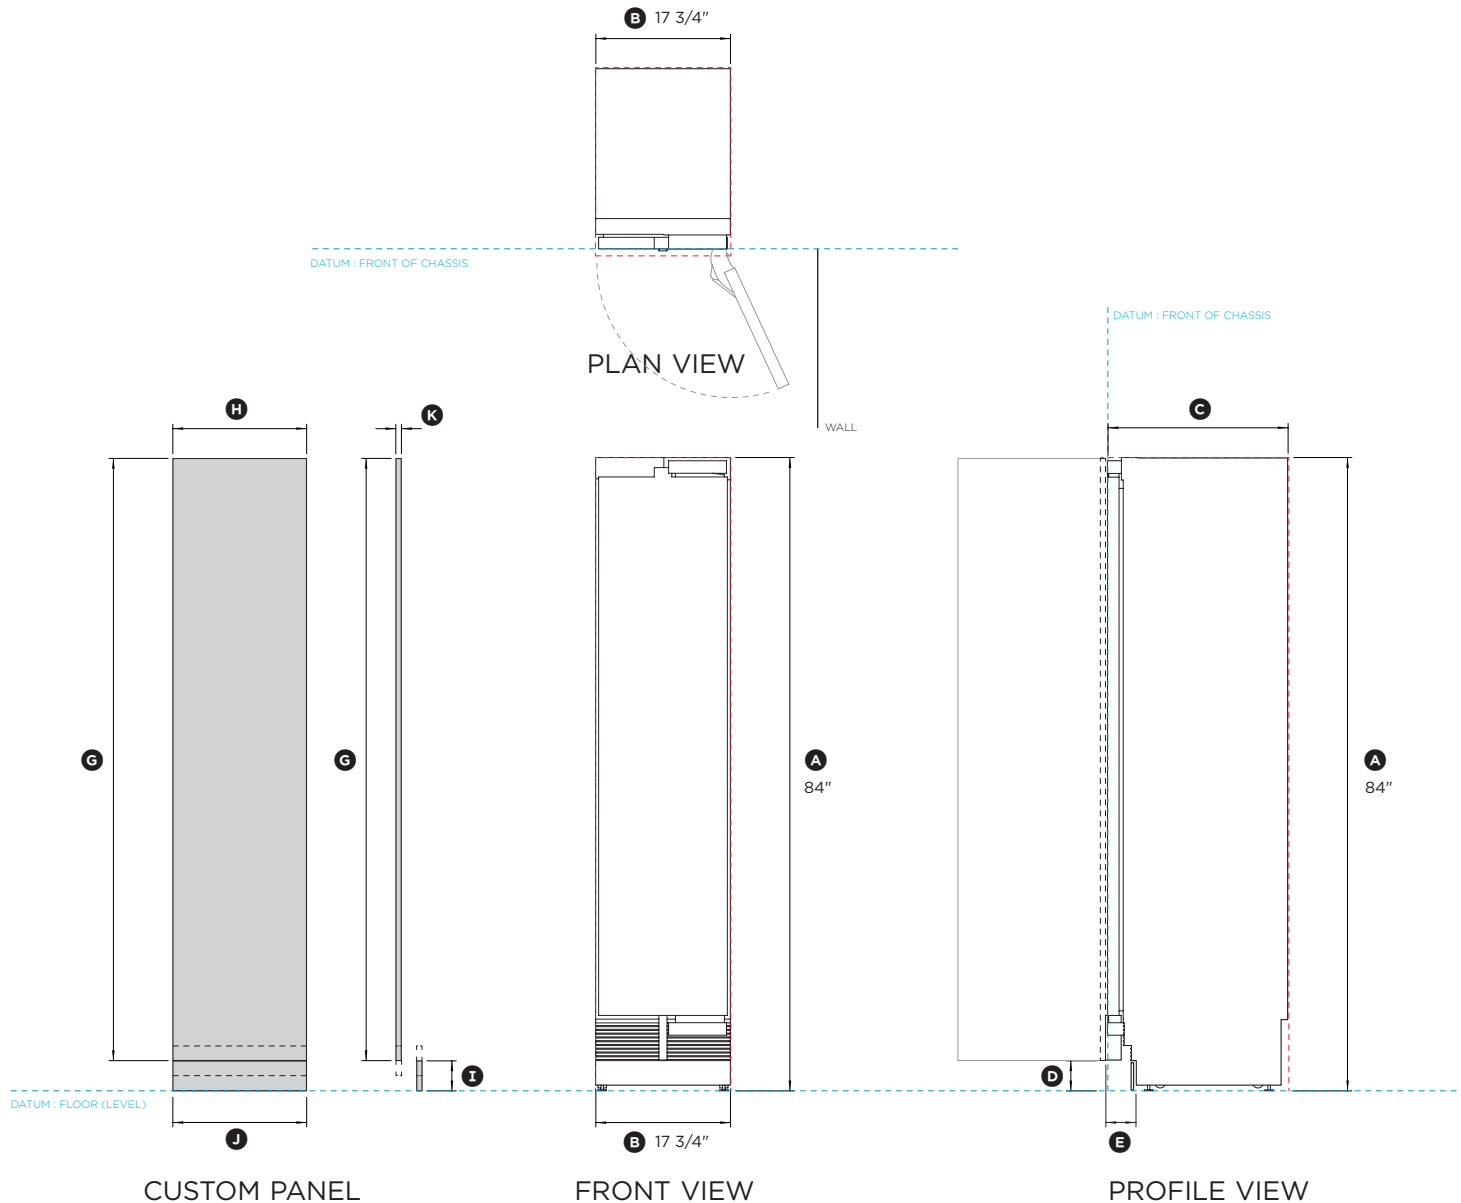

Product Dimensions	in
Ⓐ Overall height of product	84"
Ⓑ Overall width of product	17 3/4"
Ⓒ Overall depth of product (excl. front door panels)	24"
Ⓓ Height from bottom datum to bottom of door	2" - 6"
Ⓔ Depth of toekick (excl. door front and toekick panels)	2 11/16" - 4"

Custom Panel Dimensions*	in
Ⓔ Height of door panel	77 7/8" - 81 7/8"
Ⓖ Width of door panel - single install Width of door panel - dual install	17 3/4" 17 13/16"
Ⓢ Height of custom toekick panel**	2" - 6"
Ⓣ Width of custom toekick panel	17 7/8"
Ⓚ Depth of custom panels	min 5/8" - max 1"
Maximum weight of door panel (including handle***)	44lbs

* Custom panels to be manufactured & fitted by cabinetmaker

** 3 15/16" tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

*** Door handle kit is available as an optional accessory.

Clearance Dimensions	in
Minimum cabinetry gap clearance from edge of door panel	1/8"
Overall height of cavity	84"
Overall width of cavity	18"
Minimum depth of cavity	25"
Minimum door clearance to adjacent wall (115° - full internal access)	11 1/2"
Minimum door clearance at 90° open, measured from front of door	20"

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com



FISHER & PAYKEL

DATA SHEET 18" Integrated Column Freezer


Model nos:

RS1884FRJ1 / RS1884FRJK1

NOTE: Left hand hinge model is a mirrored version of image shown.

RS1884FLJ1 / RS1884FLJK1

(refer page 1 for imperial measurements)

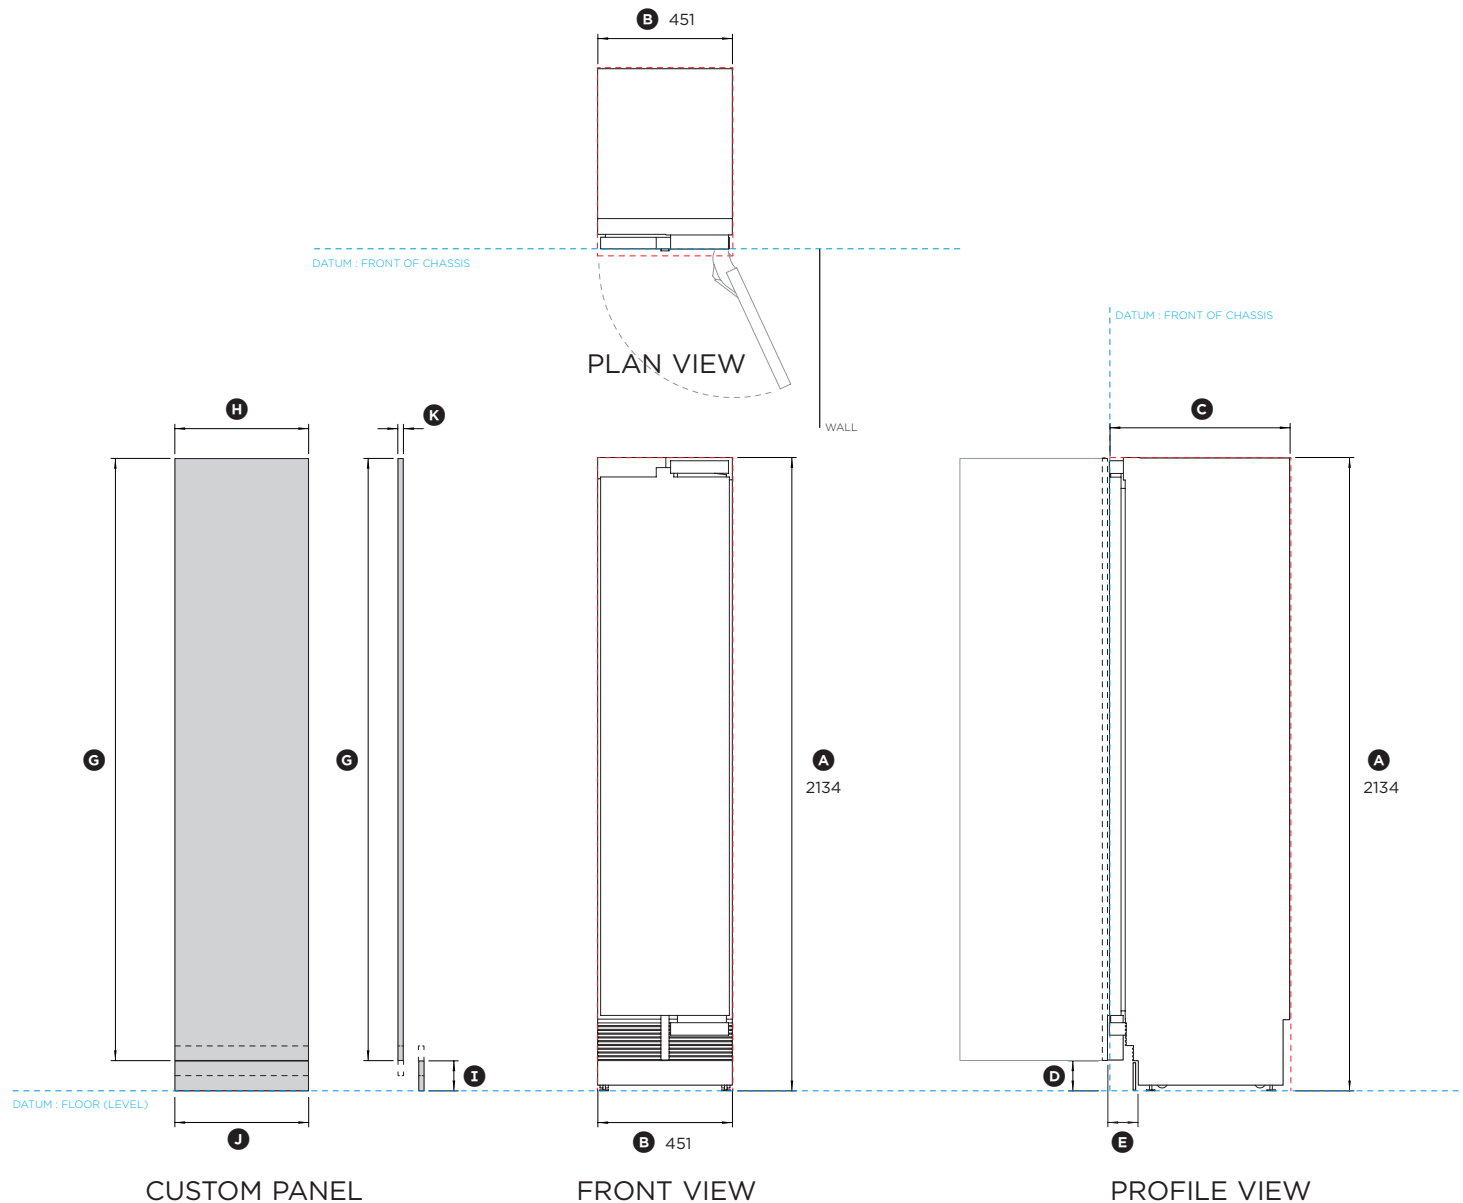

Product Dimensions	mm
Ⓐ Overall height of product	2134
Ⓑ Overall width of product	451
Ⓒ Overall depth of product (excl. front door panels)	610
Ⓓ Height from bottom datum to bottom of door	50 - 152
Ⓔ Depth of toekick (excl. door front and toekick panels)	68 - 101

Custom Panel Dimensions*	mm
Ⓔ Height of door panel	1978 - 2080
Ⓜ Width of door panel - single install Width of door panel - dual install	451 452.5
Ⓢ Height of custom toekick panel**	50 - 152
Ⓣ Width of custom toekick panel	454
Ⓚ Depth of custom panels	min 16 max 25
Maximum weight of door panel (including handle***)	20kg

* Custom panels to be manufactured & fitted by cabinetmaker

** 100mm tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

*** Door handle kit is available as an optional accessory.

Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of door panel	3
Overall height of cavity	2134
Overall width of cavity	457
Minimum depth of cavity	635
Minimum door clearance to adjacent wall (115° - full internal access)	292
Minimum door clearance at 90° open, measured from front of door	508

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 18" Professional Integrated Column Freezer

Model nos:

RS1884FRJ1 / RS1884FRJK1
with Stainless Steel Door panel RD1884R4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS18041

NOTE: Left hand hinge model is a mirrored version of image shown.

RS1884FLJ1 / RS1884FLJK1
with Stainless Steel Door panel RD1884L4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS18041
(refer page 2 for metric measurements)


Product Dimensions	in
Ⓐ Overall height of product	84"
Ⓑ Overall width of product	17 3/4"
Ⓒ Depth of product front panels (excl. handles)	3/4"
Ⓓ Overall depth of product (excl. front door panels)	24"
Ⓔ Height from bottom datum to bottom of door	4"
Ⓕ Depth of toekick (excl. door front and toekick panels)	2 11/16" - 4"
Ⓖ Height of door panel	79 7/8"
Ⓗ Width of door panel	17 3/4"
Ⓘ Height from bottom datum to bottom of handle	33 7/16"
Ⓢ Height from bottom datum to top of handle	64 3/8"
Ⓚ Thickness of handle (rail)	1"
Ⓛ Distance from side of fridge to the center of handle	2 1/2"
Ⓜ Depth of handle standoff (measured from front of door)	2 3/8"

Clearance Dimensions	in
Minimum cabinetry gap clearance from edge of door panel	1/8"
Overall height of cavity	84"
Overall width of cavity	18"
Minimum depth of cavity	25"
Minimum door clearance to adjacent wall (115° - full internal access)	11 1/2"
Minimum door clearance at 90° open, measured from front of door	20"

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

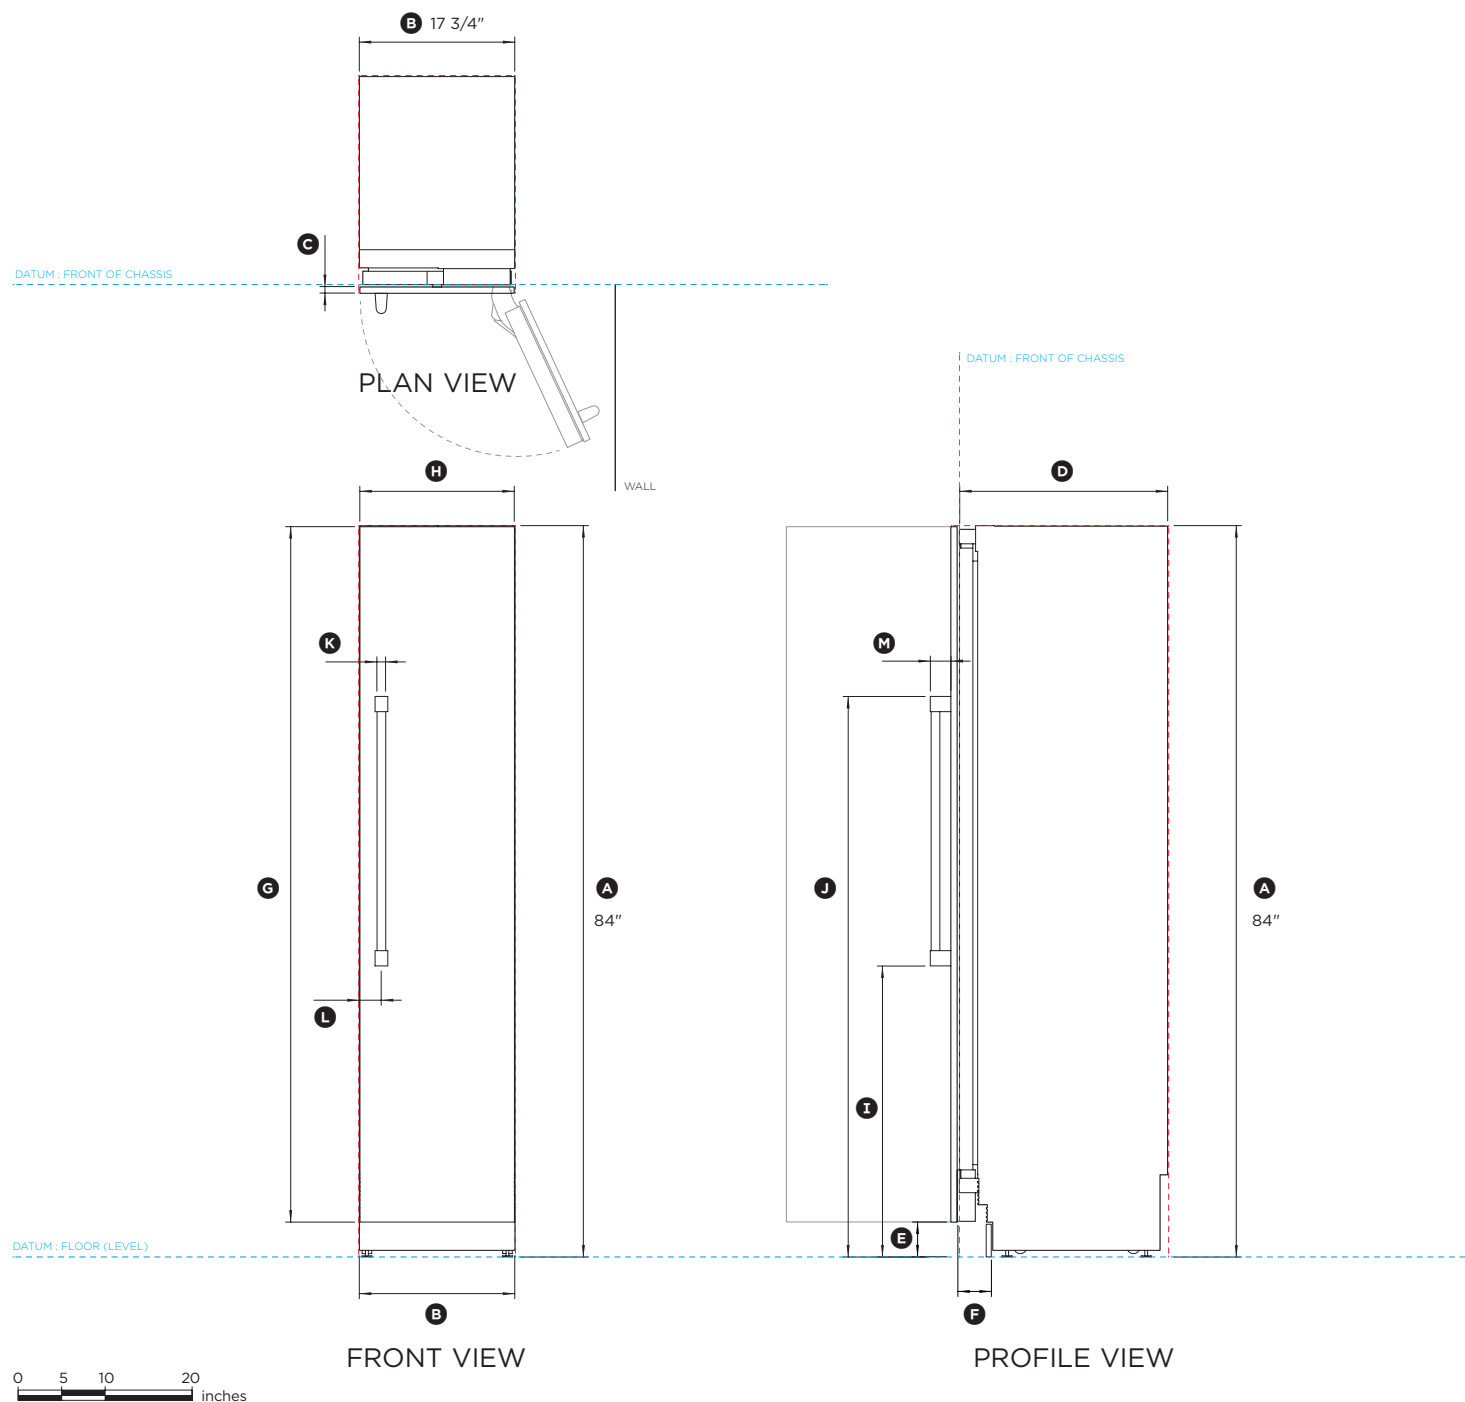

FISHER & PAYKEL

DATA SHEET 18" Professional Integrated Column Freezer

Model nos:

RS1884FRJ1 / RS1884FRJK1
with Stainless Steel Door panel RD1884R4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS18041

NOTE: Left hand hinge model is a mirrored version of image shown.

RS1884FLJ1 / RS1884FLJK1
with Stainless Steel Door panel RD1884L4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS18041
(refer page 1 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall height of product	2134
Ⓑ Overall width of product	451
Ⓒ Depth of product front panels (excl. handles)	19
Ⓓ Overall depth of product (excl. front door panels)	610
Ⓔ Height from bottom datum to bottom of door	102
Ⓕ Depth of toekick (excl. door front and toekick panels)	68 - 101
Ⓖ Height of door panel	2029
Ⓜ Width of door panel	451
Ⓢ Height from bottom datum to bottom of handle	849
Ⓣ Height from bottom datum to top of handle	1635
ⓧ Thickness of handle (rail)	25
Ⓛ Distance from side of fridge to the centre of handle	64
Ⓤ Depth of handle standoff (measured from front of door)	60

Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of door panel	3
Overall height of cavity	2134
Overall width of cavity	457
Minimum depth of cavity	635
Minimum door clearance to adjacent wall (115° - full internal access)	292
Minimum door clearance at 90° open, measured from front of door	508

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

