


## 30" Electric Cooktop

Electric Cooktop

Available Products: FFEC3025UB, FFEC3025US

Available Colors: Black, Stainless Steel

Version: 02/26

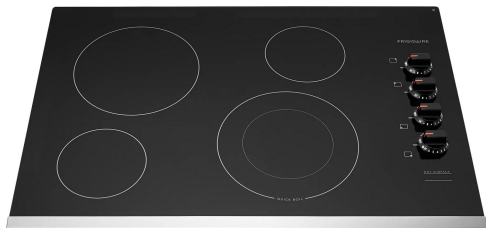

## Product Specifications

### Cooktop

Cooking Surface Type	Smooth
Hot-Surface Indicator Light	Yes

### Controls

Sabbath Mode	No
--------------	----

### Dimensions and Volume

Height	2 5/8"
Width	30 5/8"
Depth	21 3/8"

### Installation

Installed Over a Wall Oven	Yes
Power Supply Connection Location	Right Center

### Certifications and Approvals

ADA Compliant	No
---------------	----

### Safety Certifications and Approvals

CSA Listed	Yes
ETL Listed	No
UL Listed	Yes

### Cooktop Performance

Right Front Element Burner Size (Small)	6"
Right Front Element Burner Size (Large)	9"
Right Rear Element Burner Size	6"
Left Front Element Burner Size	6"
Left Rear Element Burner Size	9"
Right Front Element Burner (Small)	1600 Watts
Right Front Element Burner (Large)	3000 Watts
Right Rear Element Burner	1200 Watts
Left Front Element Burner	1200 Watts
Left Rear Element Burner	2500 Watts

### Display

Control Location	Right
Display Type	Mechanical

### Electrical Specifications

Amps @ 240 Volts	32.9 Amps
Connected Load @ 240V	7.9 kW
Minimum Circuit Required	40 Amps
Voltage Rating	240 V


### General Specifications

Frigidaire Fit Promise	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year
AB-1200	Information available at <a href="http://frigidaire.com/en/ab1200">frigidaire.com/en/ab1200</a>

### Performance Certifications and Approvals

ENERGY STAR Certified	Yes
-----------------------	-----

# Installation Diagram

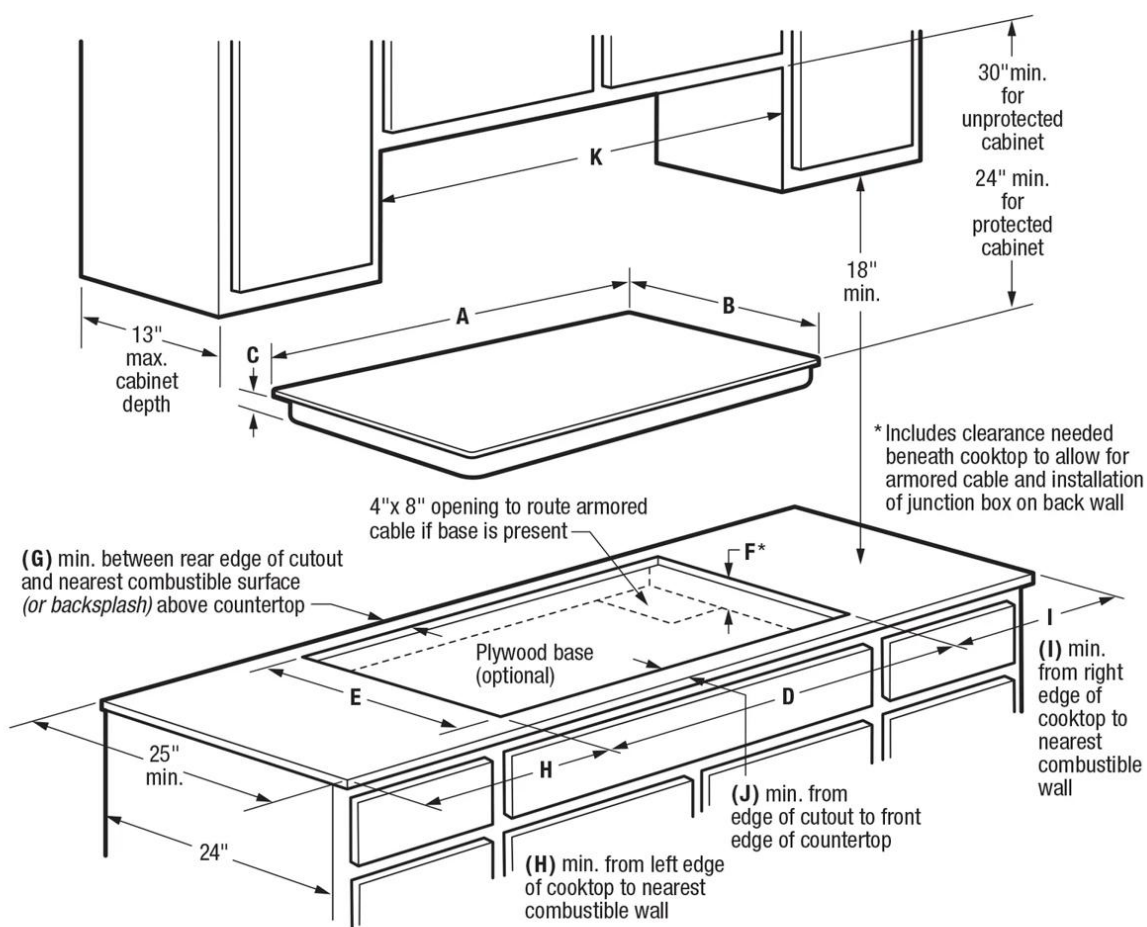

**PRODUCT DIMENSIONS**

A - Width	30-3/8"
B - Depth	21-3/8"
C - Height	2-5/8"

**CUTOUT DIMENSIONS**

D - Width (Min.)	28-1/2"
(Max.)	29-7/8"
E - Depth (Min.)	19-5/8"
(Max.)	20-1/2"
F - Height (Min.)*	5"

**REQUIRED CLEARANCES**

G - (Min.)	2"
H - (Min.)	7-1/2"
I - (Min.)	7-1/2"
J - (Min.)	2-1/2"
K - Cabinet Opening Width (Min.)	30-3/8"

**UTILITY CONNECTION LOCATIONS**

Power Supply	Right Rear
--------------	------------

\* Includes clearance needed beneath cooktop to allow for armored cable and installation of junction box on back wall

(G) min. between rear edge of cutout and nearest combustible surface (or backsplash) above countertop

4"x 8" opening to route armored cable if base is present

Plywood base (optional)

(I) min. from right edge of cooktop to nearest combustible wall

(J) min. from edge of cutout to front edge of countertop

(H) min. from left edge of cooktop to nearest combustible wall