



Whirlpool® 36-inch Wide Side-by-Side Refrigerator - 25 cu. ft.

WRS325SDHZ

Available Finishes/Colours

 WRS325SDHV
Black Stainless

 WRS325SDHW
White

 WRS325SDHZ
Fingerprint-Resistant
Stainless Finish

 WRS325SDBH
Black

Fit and find it all in this side-by-side refrigerator with purposefully-designed storage spaces for items you use most. An in-door can caddy frees up shelf space while frameless glass shelves in the deli drawer refrigerator lets you store more items on each shelf for loading flexibility. The deli drawer gives you plenty of space to store meat and cheese, too.

Top Features

Can Caddy

Frameless Glass Shelves

Adjustable Gallon Door Bins

Manuals & Literature:

 [Dimension Guide](#)  [Energy Guide](#)

 [Owners Manual](#)  [Warranty Information](#)

Dimensions		Exterior	
Depth	33.63	Reversible Door	N/A
Height	69.63	Base Grille Color	Grey
Width	35.88	Handle Color	Stainless Steel
		Handle Material	Stainless Steel
		Handle Type	Reach Through Handle
Freezer Compartment		Filters	
Freezer Number Of Shelves	3 Fixed Full Width Glass	Fresh Flow Air Filter Included	No
Door Bins	1 Fixed Partial; 3 Fixed Full-Width	Produce Preserver	No
Door Type	Swing	Water Filter Location	Exterior
Freezer Drawer Basket	1 Full Width Lower Plastic	Water Filter Part Number	EDR1RXD1
Light	Yes	Icemaker	
Shelves	3 Fixed Full Width Glass	Icemaker	Yes
Exterior			
Cabinet Color	Grey		
Cabinet Finish	Textured		
Door Finish	Smooth		
Door Style	Contour		
Hidden Hinge	Yes		
Number Of Doors	2		

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS


WRS315SDH*	WRS315SNH*
WRS312SNH*	WRS335SDH*
WRS331SDH*	WRS311SDH*
WRS321SDH*	WRS555SIH*
WRS315SNH*	WRS325SDH*

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

LOCATION REQUIREMENTS

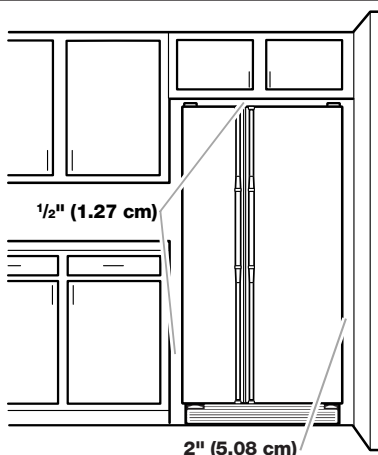


To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cutout width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.

PRODUCT DIMENSIONS

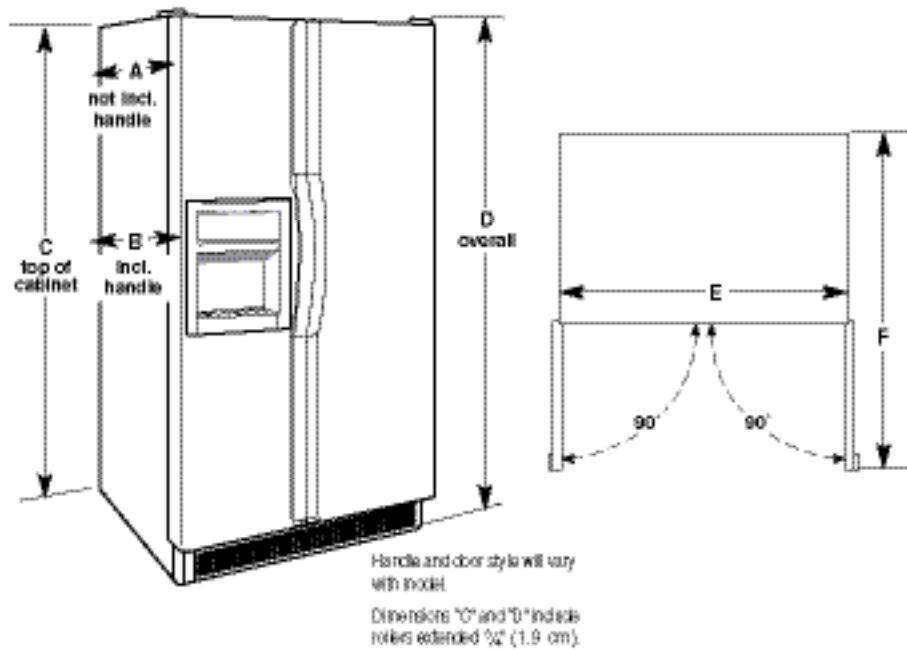

Model Number/ Capacity	Depth Without Handles "A"	Depth With Handles "B"	Height to top of Cabinet "C"	Overall height "D"	Cabinet Width "E"	Depth with Doors Open 90° "F"
WRS315SDH* 24.57 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS315SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS312SNH* 21.55 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS335SDH* 24.54 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	66 $\frac{5}{8}$ " (169.23 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS311SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS321SDH* 21.40 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS555SIH 24.51 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{1}{2}$ " (90.18 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRSA15SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS331SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS325SDH* 22.50 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)