



Whirlpool® 36-inch Wide Side-by-Side Refrigerator - 25 cu. ft.

WRS315SNHW

Available Finishes/Colours



WRS315SNHW
White



WRS315SNHM
Fingerprint-Resistant
Stainless Finish



WRS315SNHB
Black

Purposefully-designed storage spaces in this ADA compliant side-by-side refrigerator help you fit and find it all. Get increased loading flexibility with adjustable gallon door bins. LED lights keep food looking as good as it tastes while electronic controls make it easy to adjust your refrigerator whenever it's needed.

Top Features

Adjustable Gallon Door Bins

LED Interior Lighting

Hidden Hinges

Manuals & Literature:



[Dimension Guide](#)



[Energy Guide](#)



[Owners Manual](#)



[Warranty Information](#)

Dimensions		Exterior	
Depth	33.63	Door Style	Contour
Height	69.63	Hidden Hinge	Yes
Width	35.88	Number Of Doors	2
Freezer Compartment		Reversible Door	N/A
		Base Grille Color	White
		Handle Color	White
		Handle Type	Reach Through Handle
Freezer Number Of Shelves	1 Fixed Full-Width Plastic; 4 Fixed Full-Width Wire	Filters	
Door Bins	4 Fixed Full-Width	Fresh Flow Air Filter Included	No
Door Type	Swing	Produce Preserver	No
Freezer Drawer Basket	1 Full Width Lower Plastic	Icemaker	
Light	Yes	Icemaker	No / Optional Accessory
Shelves	1 Fixed Full-Width Plastic; 4 Fixed Full-Width Wire	Refrigerator Compartment	
Exterior		Conventional Shelves	1 Fixed Full-Width Glass; 3 Adjustable Full-Width Glass
Cabinet Color	White		
Cabinet Finish	Textured		
Door Finish	Smooth		

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS


WRS315SDH*	WRS315SNH*
WRS312SNH*	WRS335SDH*
WRS331SDH*	WRS311SDH*
WRS321SDH*	WRS555SIH*
WRS315SNH*	WRS325SDH*

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

LOCATION REQUIREMENTS

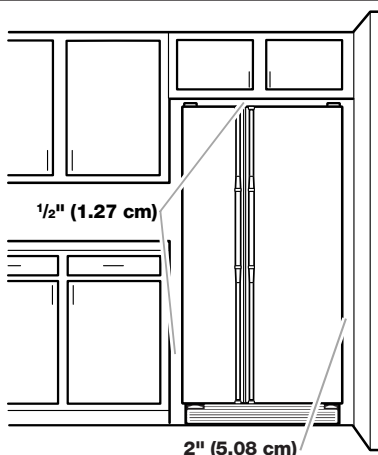


To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cutout width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.

PRODUCT DIMENSIONS

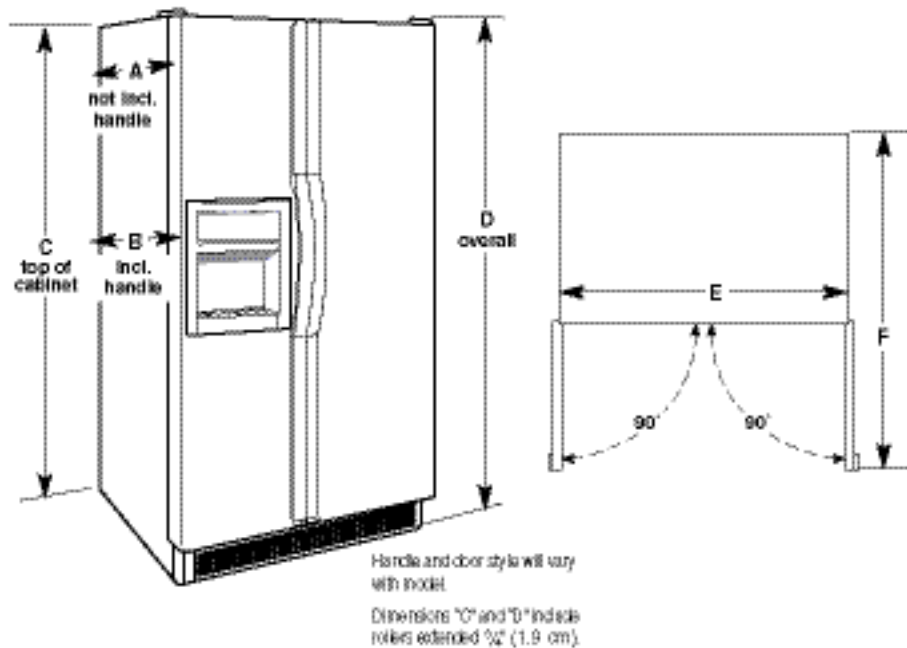

Model Number/ Capacity	Depth Without Handles "A"	Depth With Handles "B"	Height to top of Cabinet "C"	Overall height "D"	Cabinet Width "E"	Depth with Doors Open 90° "F"
WRS315SDH* 24.57 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS315SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS312SNH* 21.55 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS335SDH* 24.54 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	66 $\frac{5}{8}$ " (169.23 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS311SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS321SDH* 21.40 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS555SIH 24.51 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{1}{2}$ " (90.18 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRSA15SNH* 25.1 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS331SDH* 21.42 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	65 $\frac{5}{8}$ " (174.31 cm)	66 $\frac{5}{8}$ " (169.23 cm)	32 $\frac{3}{4}$ " (84.12 cm)	49 $\frac{5}{16}$ " (125.25 cm)
WRS325SDH* 22.50 cu. ft.	31 $\frac{5}{8}$ " (80.33 cm)	33 $\frac{5}{8}$ " (85.41 cm)	68 $\frac{5}{8}$ " (174.31 cm)	69 $\frac{5}{8}$ " (176.85 cm)	35 $\frac{7}{8}$ " (90.11 cm)	49 $\frac{5}{16}$ " (125.25 cm)