

Maytag® 16 cu. ft. Frost Free Upright Freezer with FastFreeze Option

MZF34X16DW

Available Finishes/Colours

MZF34X16DW
White

Maytag brand keeps your favorite frozen foods their chilly best with this 16 cu. ft. upright freezer with bright LED lighting. Frost Free defrost prevents icy build-up and also helps you avoid the slushy mess of defrosting. The FastFreeze option turns your upright freezer into a time capsule for food, lowering the freezer to its coldest temperature for 24 hours to lock in flavor and freshness. Our 10-year limited parts warranty on the compressor guarantees that you can count on it to keep all your food frozen for years. In a Maytag® upright freezer, food stays its best from grocery day until weeks later when that juicy roast and those crispy vegetables become a tasty meal for your family.

Top Features

10-Year Limited Parts Warranty on the Compressor

LED Lighting

Fast Freeze option

Manuals & Literature:

Dimension Guide
Energy Guide
Owners Manual
Warranty Information

Dimensions

Height	60.75
Width	30.25
Depth	29.13

Freezer Compartment

Light	Yes
Shelves	3 Adjustable Full-Width Wire
Freezer Number Of Shelves	3 Adjustable Full-Width Wire
Door Bins	5 Fixed Full-Width

Features

Ice Maker Compatible	No
Freezer On Indicator Light	No
Fast Freeze Setting	Yes

Exterior

Freezer Handle Type	Pocket Handle

Exterior

Freezer Door Lock	No
Defrost Drain	No
Reversible Door	Yes
Hidden Hinge	Yes
Handle Material	Plastic
Door Style	Contour
Door Opening	Right Swing
Door Finish	Smooth

Controls

Temperature Monitor Alarm	No
Defrost Type	Automatic Defrost
Temperature Range	15.8 F to -15.3 F (-9.3 C to -26.3C)

MAYTAG

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Freezer

PRODUCT MODEL NUMBERS


MZF34X16D MZF34X20D
MZF34X18F

Recommended grounding method
A 115 Volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your freezer be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure
A cold water supply with water pressure of between 30 and 120 psi (207 to 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, see "Troubleshooting" or call a licensed, qualified plumber.


Reverse Osmosis Water Supply
If a reverse osmosis water filtration system is connected to your cold water supply , the water pressure to the system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

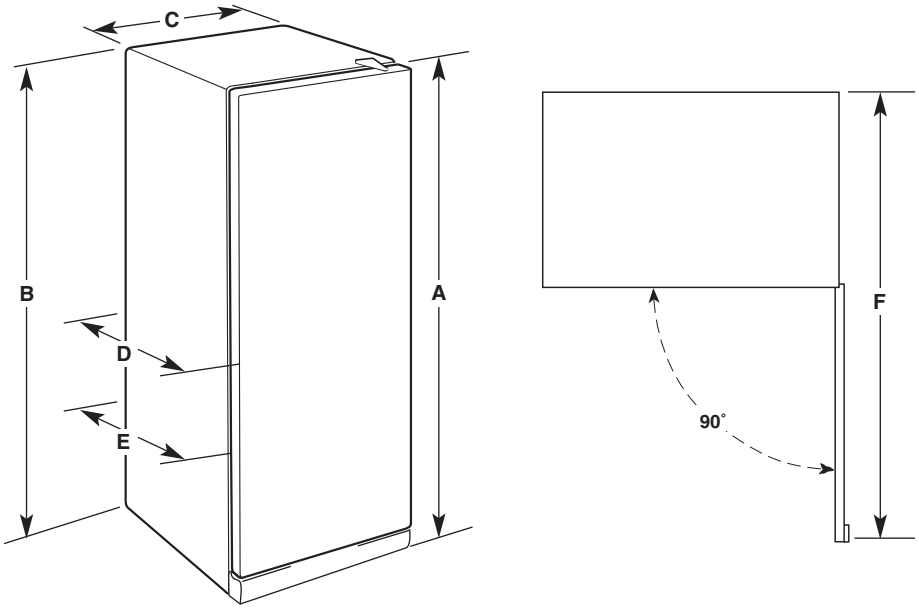

Model Number	Model Size	Reversible Door	Height (Overall) "A"	Height (Top of Cabinet) "B"	Width (Overall) "C"	Depth (Overall) "D"	Depth (Cabinet Only) "E"	Depth (Door Opens 90°) "F"
MZF34X16D	15.7 cu. ft.	Yes	60¾" (154.3 cm)	60¼" (153.0 cm)	30¼" (76.8 cm)	29⅛" (74.0 cm)	24⅝" (62.6 cm)	55⅞" (142.0 cm)
MZF34X20D	19.6 cu. ft.	Yes	66¾" (169.6 cm)	66¼" (168.3 cm)	33¼" (84.5 cm)	29⅛" (74.0 cm)	24⅝" (62.6 cm)	58⅞" (149.6 cm)
MZF34X18F	17.7 cu. ft.	Yes	66¾" (169.6 cm)	66¼" (168.3 cm)	30¼" (76.8 cm)	29⅛" (74.0 cm)	25⅝" (65.1 cm)	55⅞" (142.0 cm)

LOCATION REQUIREMENTS

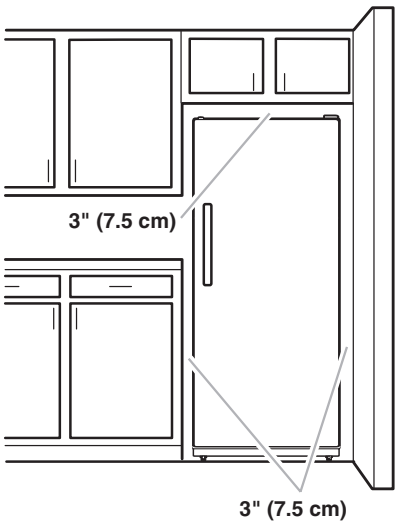

IMPORTANT: Do not install the freezer near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 40°F (5°C).

Check the strength of the floor before installing your freezer. It should hold the weight of a freezer fully loaded with food.

Allow at least 3" (7.5 cm) of air space at the top and on both sides of the fr eezer and 1" (2.5 cm) between the back of the freezer and the wall. If the freezer is to be against a wall, leave extra space on the hinge side so the door can open wider.

NOTE: This freezer may be installed side by side with another refrigerator or freezer. Allow for a 3" (7.5 cm) clearance at the top and sides and a ¼" (0.64 cm) clearance between the appliances.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10675483C
02//16