

Jennair® 30" Panel-Ready Built-In Column Freezer, Left Swing

JBZFL30IGX

Available Finishes/Colours

JBZFL30IGX
Panel Ready

Open your eyes to a column that redefines refrigeration. Satisfy cravings in the quiet cool, which is controlled by precise calibration from two sensors. Revel in the daring Obsidian interior illuminated by light that comes alive as you touch the controls. Go ahead—intoxicate your senses. Open wide.

Top Features

Daring Obsidian Interior

Ecliptic Lighting

Divinity Freezing

Manuals & Literature:

Dimension Guide
Energy Guide
Installation Instruction
Owners Manual
Warranty Information

Dimensions

Depth	24.5
Height	83.5
Width	29.75

Freezer Compartment

Shelves	3 Adjustable Full-Width Glass
Door Type	Swing
Freezer Number Of Shelves	3 Adjustable Full-Width Glass
Light	Yes

Electrical

Amps	15.0

Exterior

Cabinet Finish	Smooth
Door Opening	Left Swing
Door Style	Flat
Hidden Hinge	Yes

Exterior

Number Of Doors	1
Reversible Door	No

Filters

Produce Preserver	No
Water Filter Part Number	EDR2RXD1

Dispenser

Types Of Ice	Cubed
Dispenser Type	N/A

Icemaker

Icemaker	Yes
Icemaker Location	Freezer

Refrigerator Compartment

Door Bins	
Liner Finish	Obsidian

JENNAIR

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

Base Unit (Panel Ready)	Base Unit+Stainless Panel Kits			
	RISE™ Stainless Panel	NOIR™ Stainless	Euro-Style Stainless Panel	Pro-Style® Stainless Steel Panel
Column freezer JBZFR30IGX, JBZFL30IGX				
	LH: JKCPL301GL, RH: JKCPR301GL	LH: JKCPL301GM, RH: JKCPR301GM	LH: JKCPL301GS, RH: JKCPR301GS	LH: JKCPL301GP, RH: JKCPR301GP

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

RISE™ STAINLESS HANDLE KIT

- W11220303
- For use with Custom Overlay panels
- Quantity - One handle per kit

NOIR™ STAINLESS HANDLE KIT

- W11220302
- For use with Custom Overlay panels
- Quantity - One handle per kit





EURO-STYLE HANDLE KIT COLUMNS

- W11220300
- For use with Custom Overlay panels
- Quantity - One handle per kit

PRO-STYLE® HANDLE KIT COLUMNS

- W11220299
- For use with Custom Overlay panels
- Quantity - One handle per kit

JOIN KITS (FOR MULTIPLE UNIT INSTALLATIONS)

			
Handle-to-handle join kit (JAJ13HSS)	Handle-to-hinge join kit (JAJ11HSS)	Hinge-to-handle join kit (JAJ12HSS)	Burlesque Handle-to-handle join kit (JAJ14JSS)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

W11356535C


30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)

PRODUCT DIMENSIONS

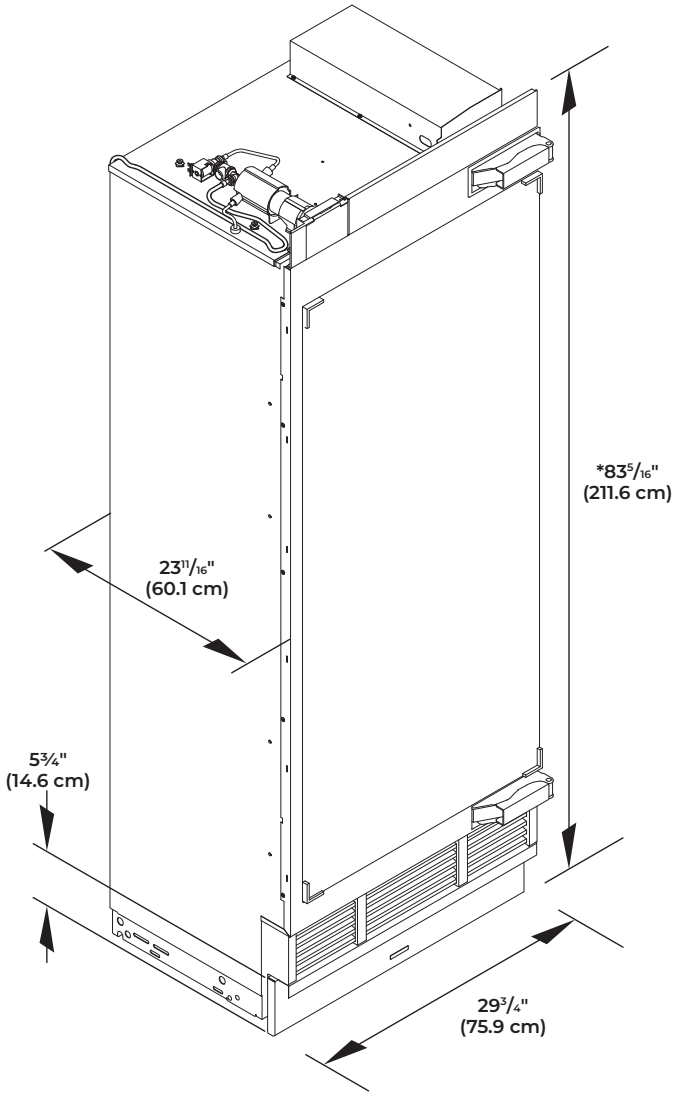

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)

PRODUCT DIMENSIONS

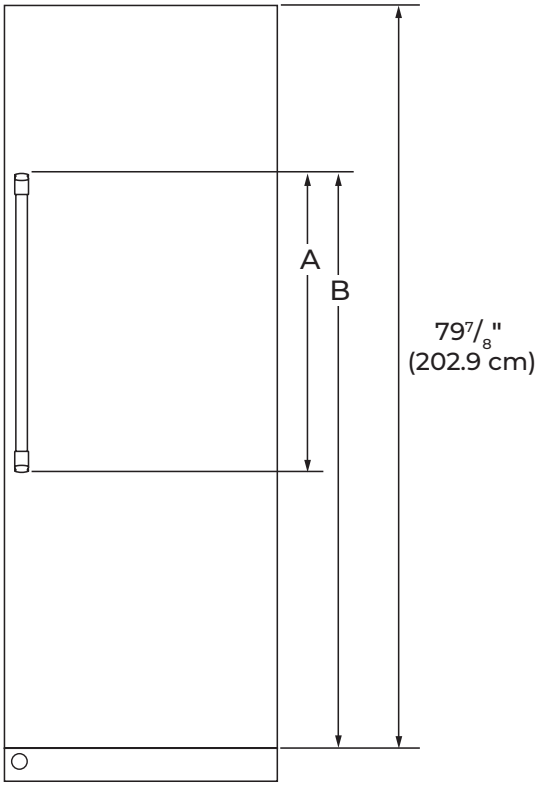

FRONT VIEW

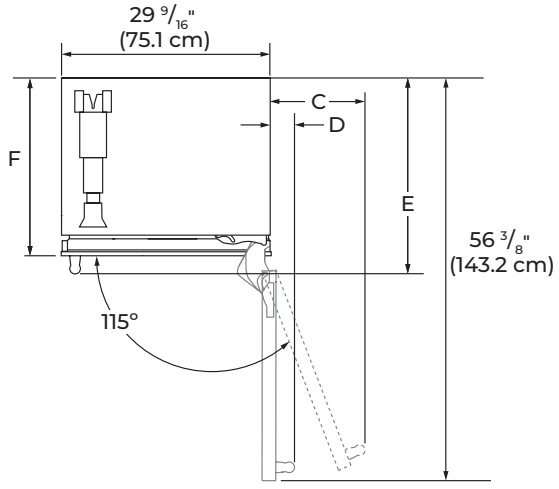

TOP VIEW

DIMENSION	DESCRIPTION	JBRFR30IGX JBRFL30IGX
A	**Height of door handle** RISE™ Stainless	57 15⁄16" (147.2 cm)
	NOIR™ Stainless	40 5⁄8" (103.2 cm)
	Euro-Style Stainless	50 1⁄16" (127.1 cm)
	Pro-Style® Stainless	45 9⁄16" (115.7 cm)
	Custom panel (3/4" thick)	** **
B	**Height to top of door handle** RISE™ Stainless	70¾" (179.7 cm)
	NOIR™ Stainless	68 11⁄16" (174.5 cm)
	Euro-Style Stainless	68 5⁄16" (173.4 cm)
	Pro-Style® Stainless	66 1⁄16" (167.7 cm)
	Custom panel (3/4" thick)	** **
C	**Width from side of freezer to handle – door fully open 115°**	15½" (39.4 cm)
D	**Width from side of freezer to handle – door open 90°**	5" (12.7 cm)
E	**Depth with handle** RISE™ Stainless	26 5⁄8" (67.7 cm)
	NOIR™ Stainless	26 9⁄16" (67.5 cm)
	Euro-Style Stainless	26 9⁄16" (67.4 cm)
	Pro-Style® Stainless	27 1⁄8" (68.9 cm)
	Custom panel (3/4" thick)	** **
F	**Depth with door**	24½" (62.2 cm)

**For custom panel models, this depends on handle chosen.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)

OPENING DIMENSIONS

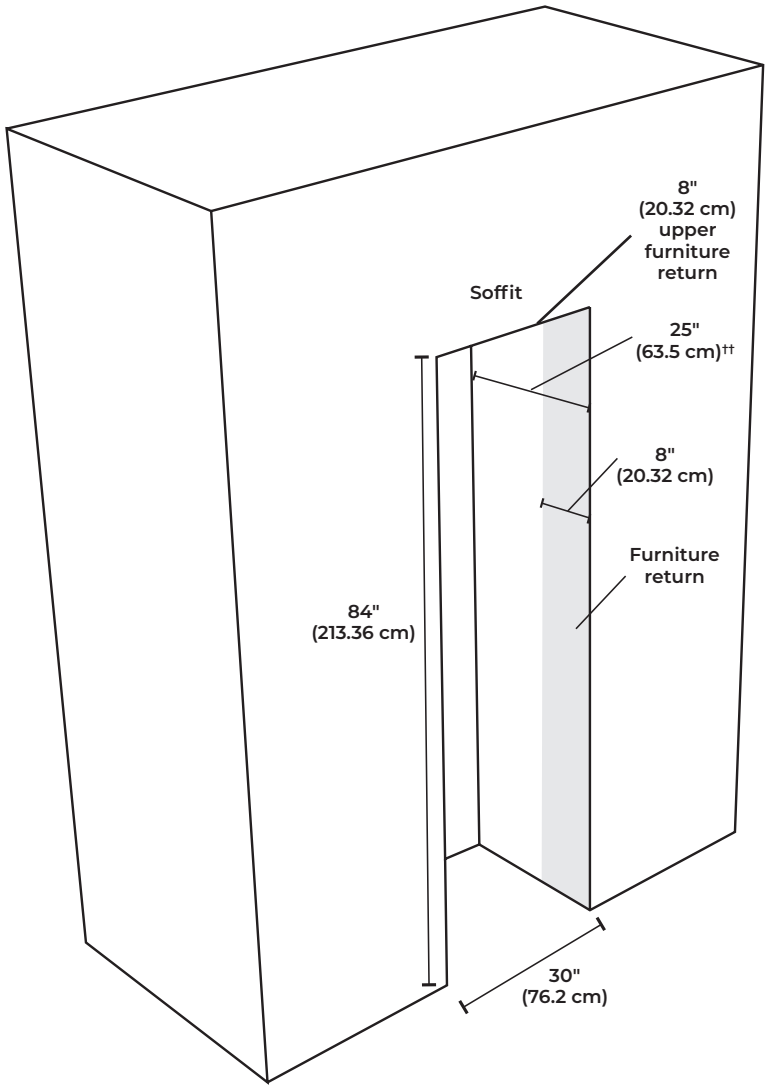

††24" with 24" trim kit.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)



water supply location
under unit
(accessible behind air grille)

TOP VIEW - CABINET OPENING

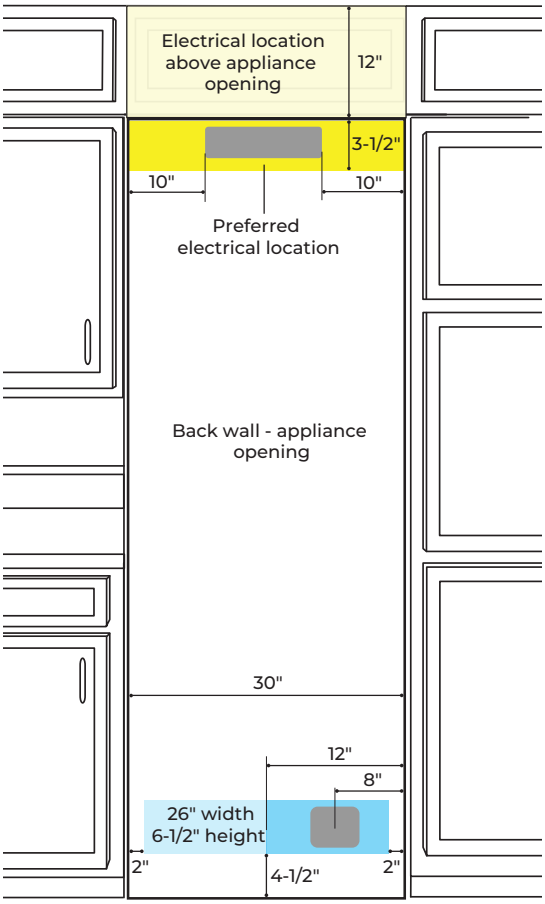

water supply location behind unit
(also approved for electrical supply)

FRONT VIEW - CABINET OPENING

ELECTRICAL SUPPLY LOCATION

- Lighter yellow area indicates electrical supply located in a cabinet or accessible space above the unit opening.
- Power cord length is 9ft and originates from the front right corner of the unit.
- There is room for a surface mount electrical outlets within the top 3½" of the opening.
- Darker yellow area indicates the electrical supply location within the top of the opening.
- Outlet should be located near the center of the allowable area for easy connection and disconnection after installation.

WALL WATER SUPPLY LOCATIONS

- Water outlet area shown in blue.
- Water outlet area is also approved for the electrical outlet location.
- Outlet area width and height corresponds to a 3/4" deep recessed area found on the back of all unit.
- Targeting the left side of the allowable area allows for additional water line routing flexibility and easier water line management under the unit.

FLOOR WATER SUPPLY LOCATIONS

- Floor access is available through the open space behind the air grille.
- The area available is shown in blue and is limited in size by the compressor compartment on the right and leveling assembly on the left.
- The height of the open space above the access area is 11" high which makes drilling water lines access holes through floor after installation possible.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)

ELECTRICAL REQUIREMENTS

⚠WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

115 V, 60 Hz, AC only, 15 A or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 psi and 120 psi (207 kPa and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

REVERSE OSMOSIS WATER SUPPLY

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

JennAir® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

LOCATION REQUIREMENTS

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29¾" (W) x 83 7⁄16" (H) x 23 11⁄16" (Depth without door panels/handles)

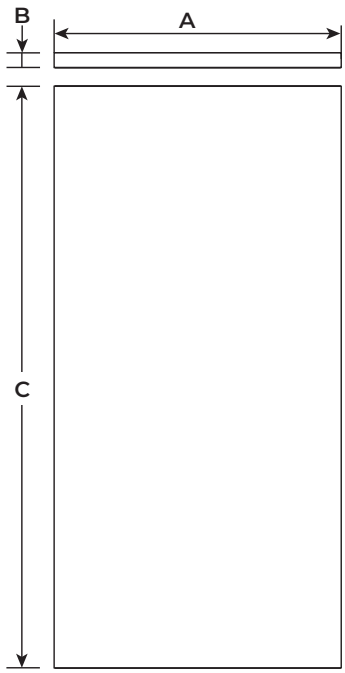

FRONT VIEW

Thickness (B)	3/4" (1.9 cm) max.
Weight	60 lbs. (27.2 kg) max.
Height (C)	79⅞" (202.9 cm)


WOOD PANEL GUIDE


⚠CAUTION


Pinch Hazard

Installation of door panels with less than a ⅜" (0.95 cm) gap between the door panel and the adjacent cabinet increases the risk of potential pinching.

MODEL	FLUSH WIDTH (A)
30"	29¾" (75.6 cm)

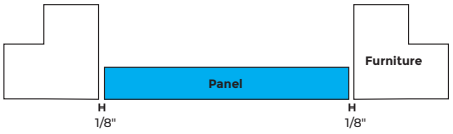

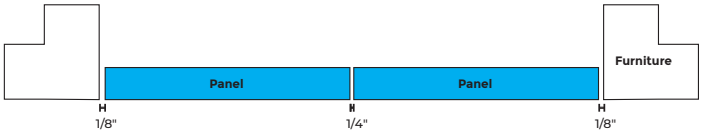

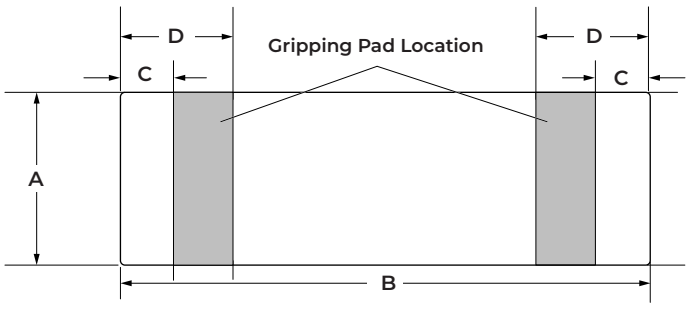

TOE KIT DIMENSIONS

	DIMENSION
A	5¾" (14.6 cm)
B	29¾" (75.4 cm)
C	1 13⁄16" (4.5 cm)
D	3¾" (9.5 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ ©2020 JennAir. All rights reserved.