


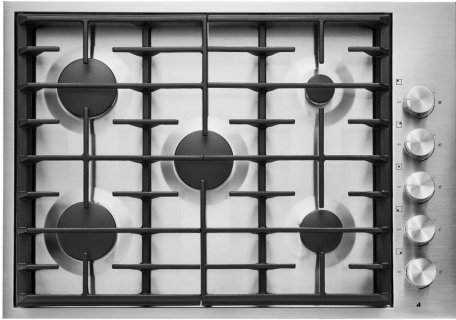

Jennair® 30", 5-Burner Gas Cooktop

JGC7530BS

Available Finishes/Colours

JGC7530BS
Stainless Steel

With an 18,000 BTU PowerBurner among five, sealed brass burners, this luxury Jenn-Air® gas cooktop offers robust power that’s perfect for precision cooking. An extremely low profile allows for a minimal look or near-flush countertop installation.

- Top Features
- 18,000-BTU Dual-Stacked PowerBurner
- Semi-Flush Installation
- White LED Burner Indicator

Manuals & Literature:


-  [Dimension Guide](#)
-  [Owners Manual](#)
-  [Warranty Information](#)

Dimensions		Features	
Depth	21.0	Power Boost	No
Height	4.5	Cooktop Details	
Width	30.0	Left Rear Element Burner Power	12000BTU
Features		Left Rear Element Burner Type	Sealed Burner
LP Convertible	Yes - Kit Included	Number Of Cooking Element Burners	5
Heating Element On Indicator Light	Yes	Right Front Element Burner Power	9000BTU
Hot Surface Indicator Light	No	Right Front Element Burner Type	Sealed Burner
Selection	Simmer	Right Rear Element Burner Power	6000BTU
Digital Display	No		
Automatic Pan Detection	No		
Downdraft Vent	No		
Installs Over Built In Oven	Yes		


30" GAS COOKTOP

JGC7530B – 30" x 5¼" x 21"


PRODUCT DIMENSIONS

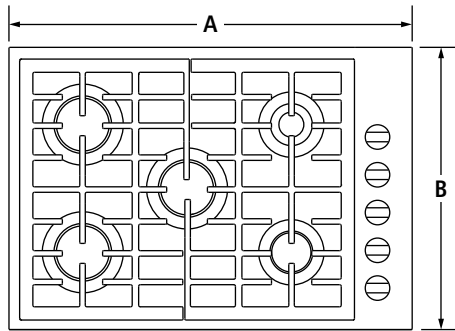

TOP VIEW

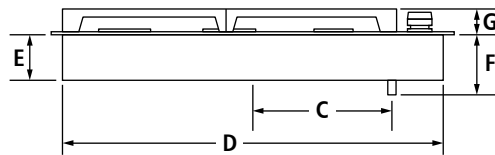

FRONT VIEW



SIDE VIEW

MODEL #		JGC7530B	
		in	cm
A	Overall width	30	76.2
B	Overall depth	21	53.3
C	Center of cooktop to center of gas inlet	12	30.5
D	Width of recessed cooktop	29¼	74.3
E	Height of recessed cooktop	¾	8.3
F	Height from gas inlet to countertop	5¼	13.3
G	Height with grates	1¼	3.2
H	Depth of recessed cooktop	20¼	51.4

IMPORTANT: Dimensional specifications are provided for planning purposes only.


Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


30" GAS COOKTOP

JGC7530B – 30" x 5¼" x 21"

OPENING/CLEARANCE DIMENSIONS

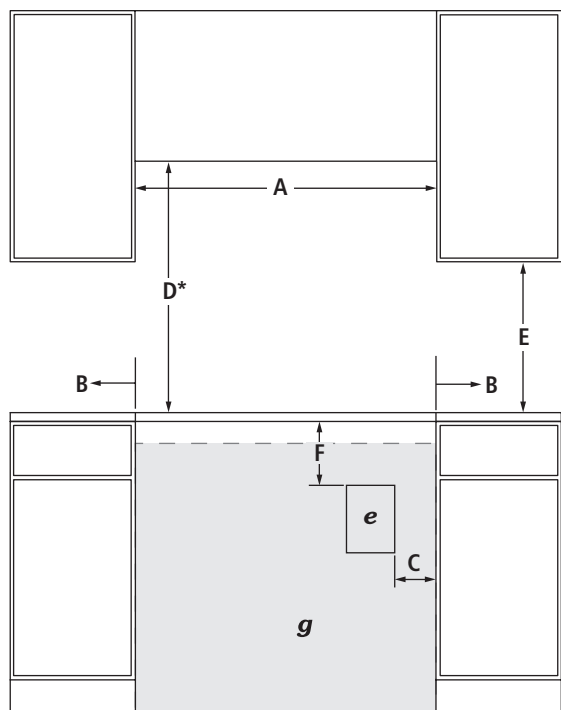

FRONT VIEW

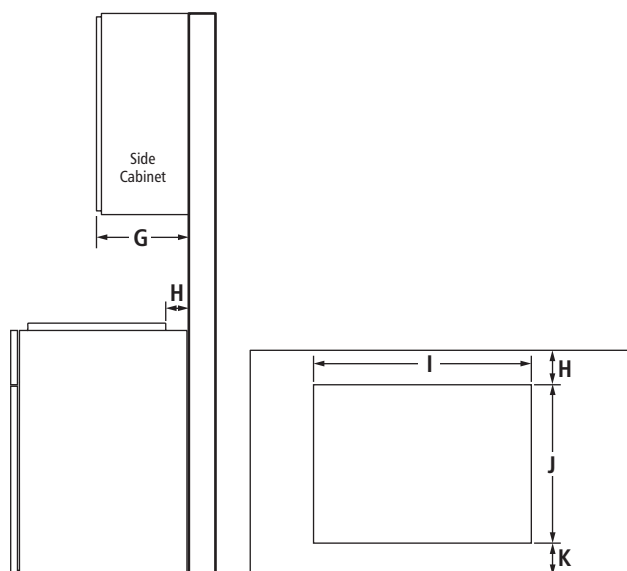

SIDE VIEW

TOP VIEW – CUTOUT

MODEL #		JGC7530B	
		in	cm
A	Width of combustible area above cooking surface (min.)	30	76.2
B	Width from cooktop to fixed wall or other combustible material (min.)	6	15.2
C	Width to outer edge of outlet (max.)	24	61.0
D*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.2
E	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
F	Height to top edge of outlet (min.)	5½	14.0
G	Depth of upper cabinet (recommended)	13	33.0
H	Depth from cutout to wall (min.)	2⅝	5.9
I	Width of cutout	29⅜	74.6
J	Depth of cutout	20⅜	51.8
K	Depth from cutout to front of countertop	2⅝	5.9
e	Recommended electrical access location		
g	Recommended gas supply line location		

*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood or microwave hood combination above the cooktop, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.

GAS REQUIREMENTS

Natural Gas

This cooktop is factory-set for use with natural gas.

LP Gas Conversion

Conversion must be done by a qualified service technician. To convert to LP gas, use an LP gas conversion kit.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. A time-delay fuse or dedicated circuit is recommended.

LOCATION REQUIREMENTS

- To ensure cooktop base clearance, cabinet side walls need to be wider than the cutout.
- If cabinet has a drawer, allow a 4" (10.2 cm) minimum clearance between countertop and top of drawer. Drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.