

Jennair® Colonne de congélation encastrée prête pour le panneau de recouvrement, charnières à gauche, 24 po

JBZFL24IGX

Finis/couleurs disponibles

JBZFL24IGX
Prêt pour panneau

Ouvrez vos yeux sur une colonne qui redéfinit la réfrigération. Conservez vos favoris dans ce froid calme, contrôlé par une calibration précise de deux capteurs. Délectez-vous de l'intérieur noir obsidienne audacieux, illuminé par des lampes qui s’allument lorsque vous touchez les commandes Allez-y - enivrez vos sens. Ouvrez grand.

Caractéristiques clés

Intérieur noir obsidienne audacieux

Éclairage écliptique

Refroidissement divin

Guides et documentation:

- Guide des dimensions
- Guide énergétique
- Instructions d’installation
- Guides d'installation
- Renseignements sur la garantie

Dimensions

Profondeur	24.5
Hauteur	83.5
Largeur	23.75

Extérieur

Nombre de portes	1
Fini de la caisse	Lisse
Ouverture de la porte	Gauche
Style de porte	Plate
Charnière dissimulée	Oui
Porte réversible	Non

Commandes

Voyant du filtre à eau/Réinitialisation	Oui

Commandes

Mode Sabbat	Oui
Emplacement des commandes	À l'intérieur à l'avant
Type de commande	Electronic Touch
Verrouillage des commandes	Oui
Avertisseur de porte ouverte ou entrouverte	Oui

Détails

Type de refroidissement	Simple évaporateur
Profondeur de comptoir	Oui

Distributeur

Type de distributeur	S/O

JENNAIR

Étant donné que la politique de Whirlpool Canada LP comprend un engagement continu dans l'amélioration de ses produits, nous nous réservons le droit de modifier les matériaux et les fiches techniques sans préavis. Les dimensions sont à des fins de planification uniquement. Pour des informations complètes, veuillez vous référer aux instructions d'installation fournies avec le produit. Les spécifications peuvent être modifiés sans préavis.

24" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

Base Unit (Panel Ready)	Base Unit+Stainless Panel Kits			
	RISE™ Stainless Panel	NOIR™ Stainless	Euro-Style Stainless Panel	Pro-Style® Stainless Steel Panel
Column freezer JBZFR24IGX, JBZFL24IGX, ALOVE24FLC	 LH: JKCPL241GL, RH: JKCPR241GL	 LH: JKCPL241GM, RH: JKCPR241GM	 LH: JKCPL241GS, RH: JKCPR241GS	 LH: JKCPL241GP, RH: JKCPR241GP

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

RISE™ STAINLESS HANDLE KIT

- W11220303
- For use with Custom Overlay panels
- Quantity - One handle per kit

NOIR™ STAINLESS HANDLE KIT

- W11220302
- For use with Custom Overlay panels
- Quantity - One handle per kit





EURO-STYLE HANDLE KIT COLUMNS

- W11220300
- For use with Custom Overlay panels
- Quantity - One handle per kit

PRO-STYLE® HANDLE KIT COLUMNS

- W11220299
- For use with Custom Overlay panels
- Quantity - One handle per kit

JOIN KITS (FOR MULTIPLE UNIT INSTALLATIONS)

 Handle-to-handle join kit (JAJ13HSS)	 Handle-to-hinge join kit (JAJ11HSS)	 Hinge-to-handle join kit (JAJ12HSS)	 Burlesque Handle-to-handle join kit (JAJ14JSS)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

W11356524C


24" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)

PRODUCT DIMENSIONS

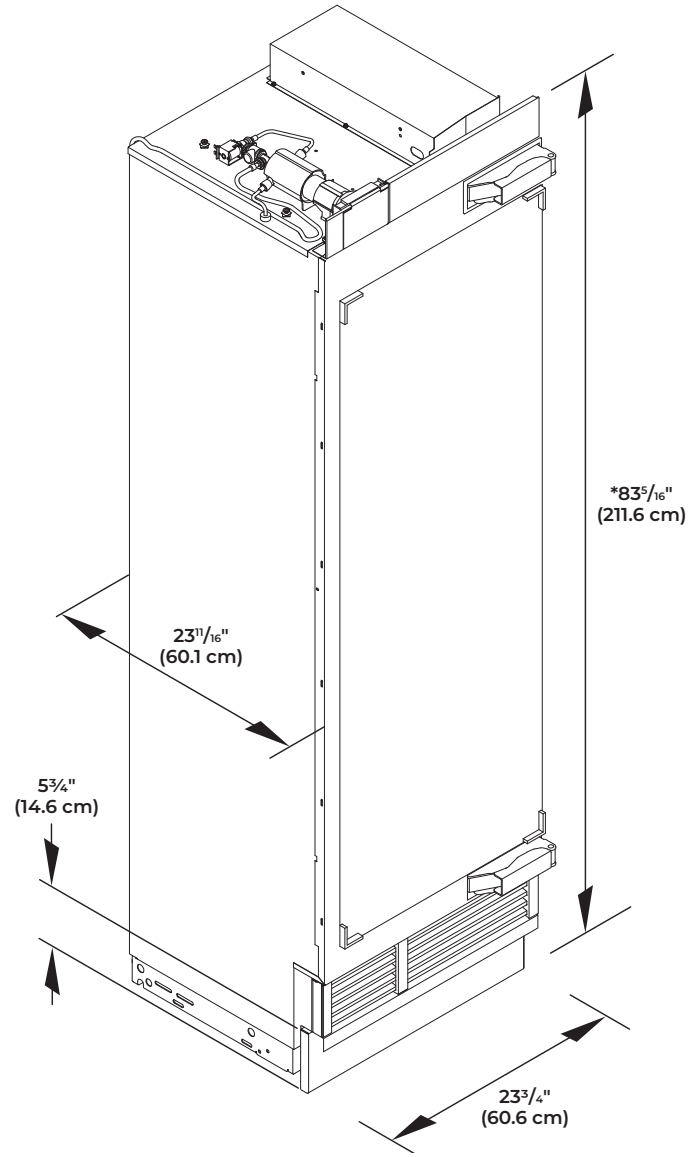

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


24" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)

PRODUCT DIMENSIONS

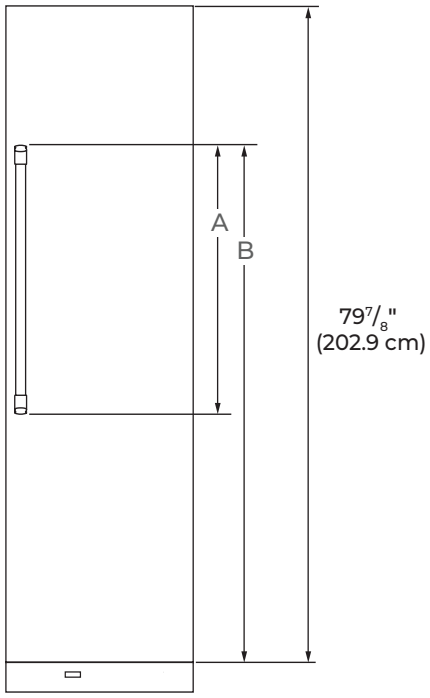

FRONT VIEW

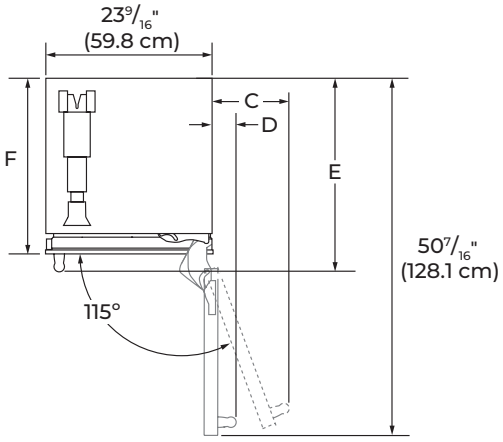

TOP VIEW

DIMENSION	DESCRIPTION	JBZFR24IGX, JBZFL24IGX, ALOVE24FLC
A	**Height of door handle** RISE™ Stainless	57¹⁵⁄₁₆" (147.2 cm)
	NOIR™ Stainless	40⅝" (103.2 cm)
	Euro-Style Stainless	50¹⁄₁₆" (127.1 cm)
	Pro-Style® Stainless	45⁹⁄₁₆" (115.7 cm)
	Custom panel (3/4" thick)	** **
B	**Height to top of door handle** RISE™ Stainless	70¾" (179.7 cm)
	NOIR™ Stainless	68¹¹⁄₁₆" (174.5 cm)
	Euro-Style Stainless	68⁵⁄₁₆" (173.4 cm)
	Pro-Style® Stainless	66¹⁄₁₆" (167.7 cm)
	Custom panel (3/4" thick)	** **
C	**Width from side of freezer to handle – door fully open 115°**	13" (33 cm)
D	**Width from side of freezer to handle – door open 90°**	5" (12.7 cm)
E	**Depth with handle** RISE™ Stainless	26⅝" (67.7 cm)
	NOIR™ Stainless	26⁹⁄₁₆" (67.5 cm)
	Euro-Style Stainless	26 ⁹⁄₁₆" (67.4 cm)
	Pro-Style® Stainless	27 ⅛" (68.9 cm)
	Custom panel (3/4" thick)	** **
F	**Depth with door**	24½" (62.2 cm)

**For custom panel models, this depends on handle chosen.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


24" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)

OPENING DIMENSIONS

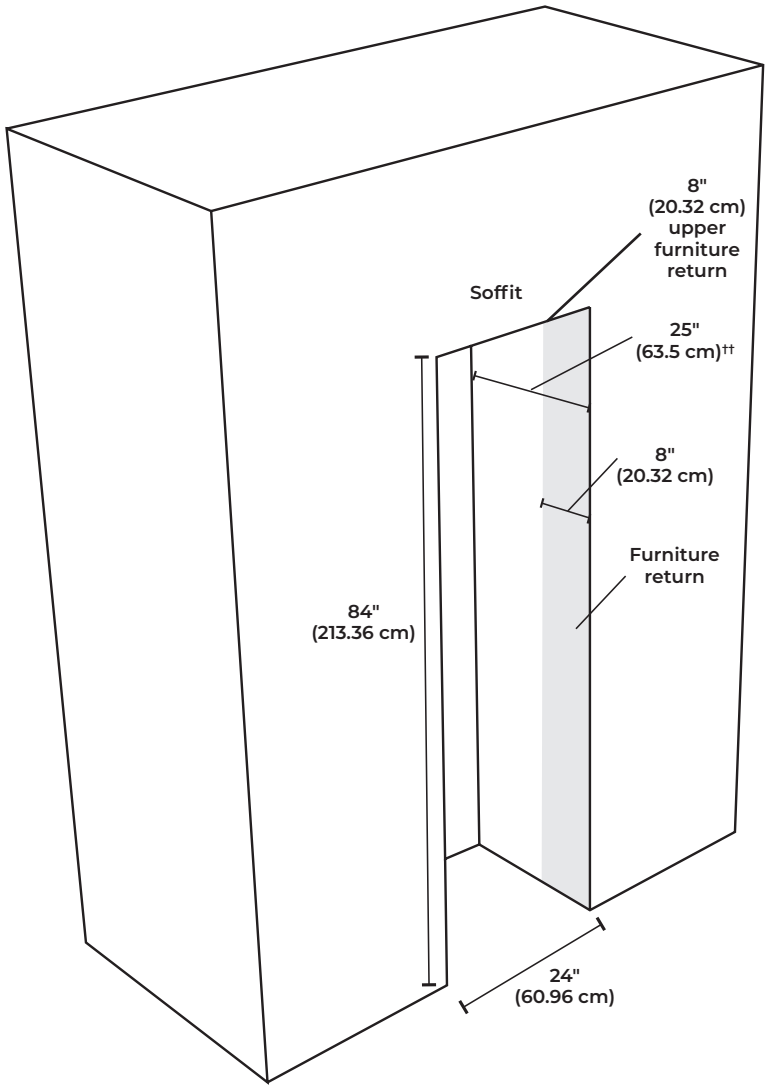

††24" with 24" trim kit.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

24" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)



water supply location
under unit
(accessible behind air grille)

TOP VIEW - CABINET OPENING

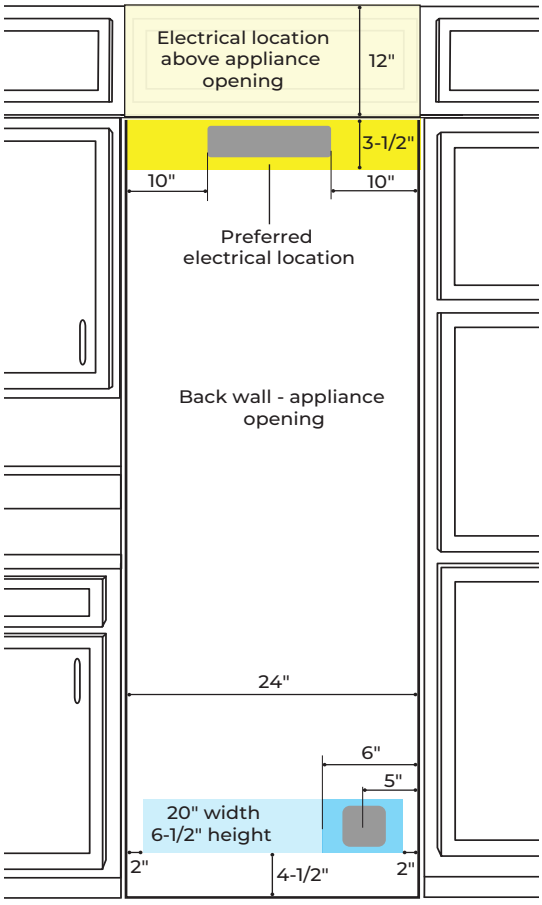

water supply location behind unit
(also approved for electrical supply)

FRONT VIEW - CABINET OPENING

ELECTRICAL SUPPLY LOCATION

- Lighter yellow area indicates electrical supply located in a cabinet or accessible space above the unit opening.
- Power cord length is 9ft and originates from the front right corner of the unit.
- There is room for a surface mount electrical outlets within the top 3½" of the opening.
- Darker yellow area indicates the electrical supply location within the top of the opening.
- Outlet should be located near the center of the allowable area for easy connection and disconnection after installation.

WALL WATER SUPPLY LOCATIONS

- Water outlet area shown in blue.
- Water outlet area is also approved for the electrical outlet location.
- Outlet area width and height corresponds to a 3/4" deep recessed area found on the back of all unit.
- Targeting the left side of the allowable area allows for additional water line routing flexibility and easier water line management under the unit.

FLOOR WATER SUPPLY LOCATIONS

- Floor access is available through the open space behind the air grille.
- The area available is shown in blue and is limited in size by the compressor compartment on the right and leveling assembly on the left.
- The height of the open space above the access area is 11" high which makes drilling water lines access holes through floor after installation possible.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

24" COLUMN REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)

ELECTRICAL REQUIREMENTS

⚠WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

115 V, 60 Hz, AC only, 15 A or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 psi and 120 psi (207 kPa and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

REVERSE OSMOSIS WATER SUPPLY

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

JennAir® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

LOCATION REQUIREMENTS

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

24" COLUMN REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR24IGX, JBZFL24IGX and ALOVE24FLC

23¾" (W) x 83⁷⁄₁₆" (H) x 23¹¹⁄₁₆" (Depth without door panels/handles)

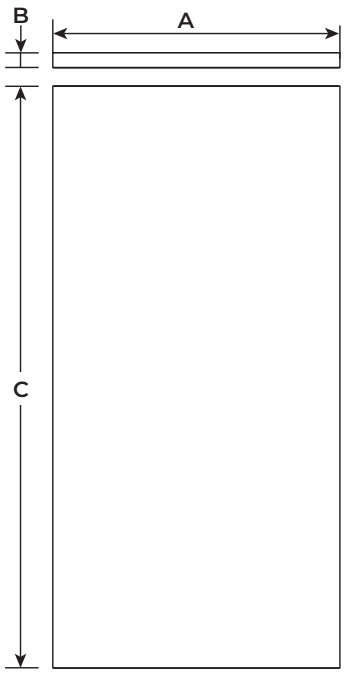

FRONT VIEW

Thickness (B)	3/4" (1.9 cm) max.
Weight	60 lbs. (27.2 kg) max.
Height (C)	79⅞" (202.9 cm)


WOOD PANEL GUIDE


⚠CAUTION


Pinch Hazard

Installation of door panels with less than a ⅜" (0.95 cm) gap between the door panel and the adjacent cabinet increases the risk of potential pinching.

MODEL	FLUSH WIDTH (A)
24"	23¾" (60.3 cm)





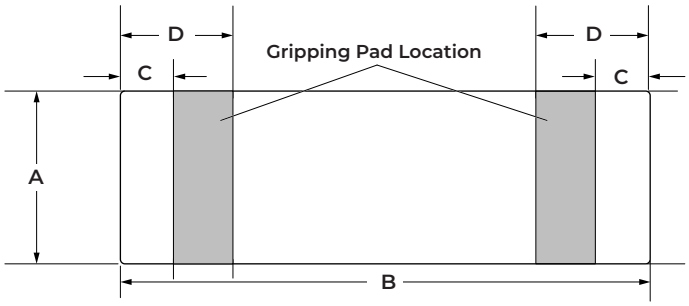

TOE KIT DIMENSIONS

	DIMENSION
A	5¾" (14.6 cm)
B	23¾" (60.2 cm)
C	1¹³⁄₁₆" (4.5 cm)
D	3¾" (9.5 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ ©2020 JennAir. All rights reserved.