




Réfrigérateur à portes françaises à profondeur standard avec distributeur extérieur d'eau et de glaçons - 26.8 pi cu - 36 po

KRFF507HPS

Finis/couleurs disponibles

 KRFF507HBS
Black Stainless Steel with PrintShield™ Finish

 KRFF507HPS
Acier inoxydable à fini PrintShield™

Dimensions

Profondeur	36 5/8
Hauteur	69 7/8
Largeur	35 11/16

Détails

Profondeur de comptoir	Non
Style de porte	Incurvée

Distributeur

Largeur(IN, inches)	35 11/16
Type de glaçons	Broyé / en cubes
Couleur de la palette du distributeur	Noir

Volumes AHAM et tablettes

Volume du congélateur (pi3)	7.77
Volume du réfrigérateur (pi3)	19.03
Volume total (pi3)	26.8

AHAM Volumes And Shelf Area

Refrigerator Volume (Cu Ft)	19.03
-----------------------------	-------

Contrôles

Type de contrôle	Commandes à effleurement
------------------	--------------------------

Compatibilité

Fonctionne avec	Non
-----------------	-----

Extérieur

Couleur de la grille de base	Gris
Couleur de la caisse	Gris

Détails

Type de refroidissement	Simple évaporateur
-------------------------	--------------------

Ce réfrigérateur à portes françaises de 26,8 pi³ maintient la fraîcheur des fruits et légumes grâce au système de gestion de la température ExtendFresh™. Un plateau coulissant permet d'accueillir des grandes assiettes facilement et un garde-manger pleine largeur à température contrôlée optimise la température et la circulation d'air pour les aliments spécifiques que vous conservez. L'intérieur à conception raffinée comprend un éclairage à DEL et les accents métalliques ajoutent une touche d'élégance.



Caractéristiques clés

Finis PrintShield™

Système de gestion de la température ExtendFresh™

Plateau coulissant

Guides et documentation:

 [Dimension Guide](#)  [Energy Guide](#)

 [Owner Manual](#)  [Warranty Information](#)

KitchenAid® French Door Bottom Mount Refrigerator

PRODUCT MODEL NUMBER:

KRFF507H

ELECTRICAL AND WATER REQUIREMENTS:

Electrical: A 115 volt, 60 Hz, AC only 15 or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.



NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS:

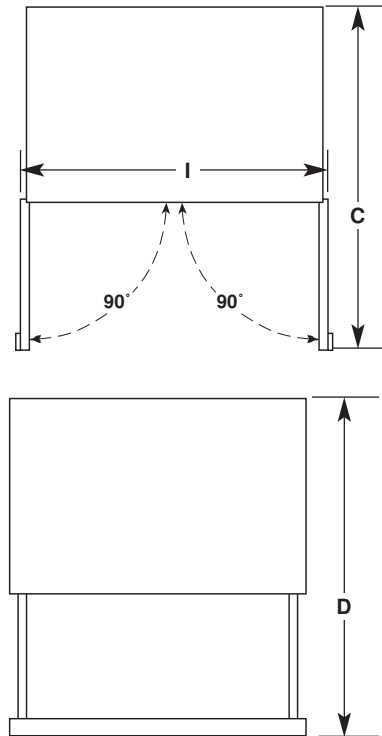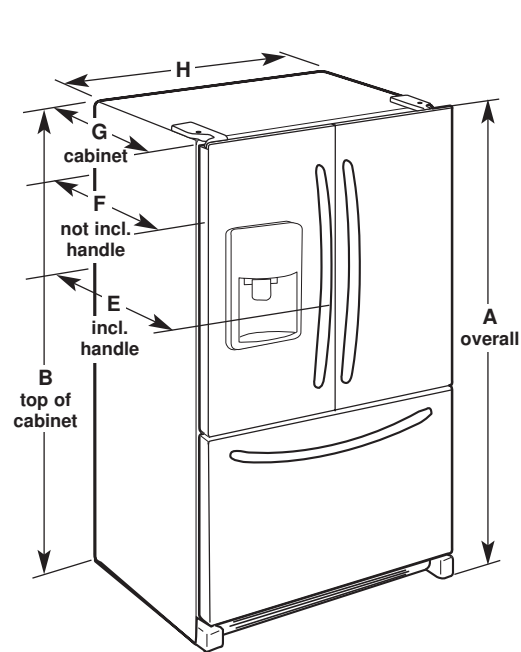

Model Number	KRFF507H
Model Size	27 cu. ft. (764.6 L)
Height - Overall "A"	70 ¹ / ₈ " (178.1 cm)
Height - Top of Cabinet "B"	68 ³ / ₄ " (174.6 cm)
Depth - Doors Open 90° "C"	48 ⁵ / ₈ " (123.5 cm)
Depth - Drawer Open With Handles "D"	54 ¹ / ₄ " (137.8 cm)
Depth - With Handles "E"	36" (91.4 cm)
Depth - Without Handles "F"	33 ³ / ₄ " (85.7 cm)
Depth - Cabinet Only "G"	29 ⁵ / ₈ " (75.2 cm)
Width - Cabinet Only "H"	35 ⁵ / ₈ " (90.5 cm)
Width - Doors Open 90° "I"	38 ³ / ₈ " (97.5 cm)

LOCATION REQUIREMENTS:

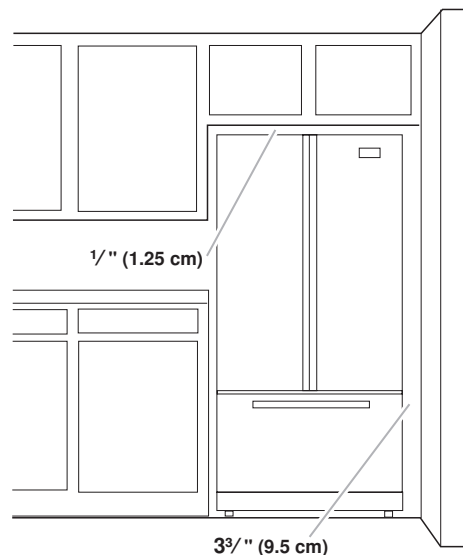

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3³/₄" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.