





Selected Model	
Model number	CDV3-304HL
Fuel Type	Propane Gas (LP)
Exterior Appearance	
Cooking Surface	Brushed stainless Steel, easy to clean and highly resistant to staining
Cooking Grates	Robust Cast-Iron
Color	Stainless Steel
Dimensions	
Height (in.)	5 1/2"
Width (in.)	30"
Depth (in.)	21"
Features	
Fuel Type	Propane
Configuration	4 Burners
Ignition System	Electronic with automatic reignition
Burner type	Sealed
Control Type	Illuminated control knobs
Controls localisation	Right side
Burner ratings	
Back burners	15000 BTU
Front left burner	20000BTU
Front right burner	15000BTU
Simmer performance (140°F)	On all 4 burners (performance may vary on LP models)
Total BTU capacity	65000 BTU
Electrical Requirements	
Volts; Hertz; Amps	120V/ 60Hz/ 15Amp
Warranty	
Full 2 years	Entire Appliance; In-Home; Parts & Labour


PRODUCT DIMENSIONS 30" MODELS

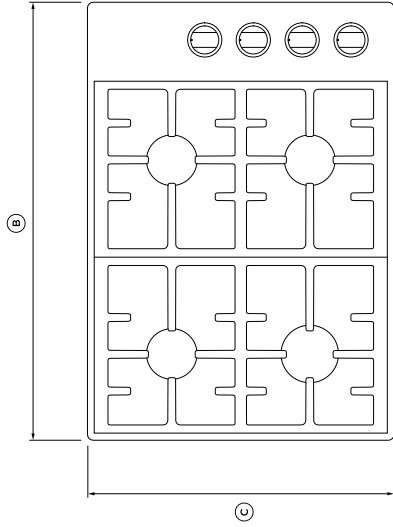


PLAN

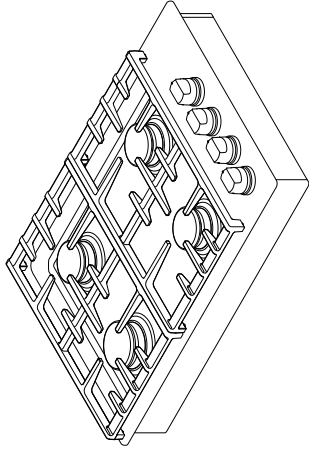

ISOMETRIC

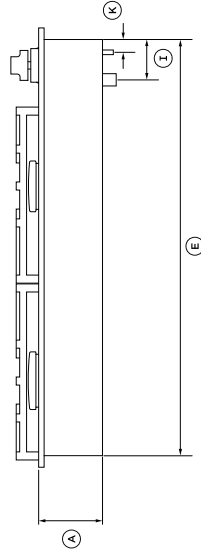

FRONT

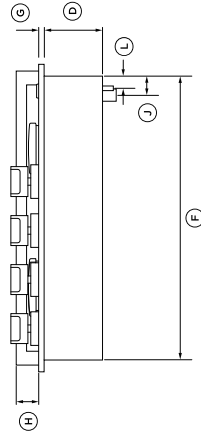


PROFILE

PRODUCT DIMENSIONS	30" MODELS	
	IN	MM
A Overall height*	4 5/16	110
B Overall width	30	762
C Overall depth	21	533
D Height of chassis	4	102
E Width of chassis	28 7/16	723
F Depth of chassis	19 3/8	492
G Height above countertop	3/8	10
H Height above countertop to top of grates	1 9/16	40
I Distance from right edge of chassis to centre of gas inlet	2 3/4	70
J Distance from rear edge of chassis to centre of gas inlet	1 5/16	33
K Distance from right edge of chassis to centre of power cord	7/8	22
L Distance from rear edge of chassis to centre of power cord	1 3/16	21
*excluding grates		
PRODUCT WEIGHT	30" MODELS	
	LB	KG
Weight of product (excluding packaging)		
	64	29


CABINERY DIMENSIONS

30" CUTOUT

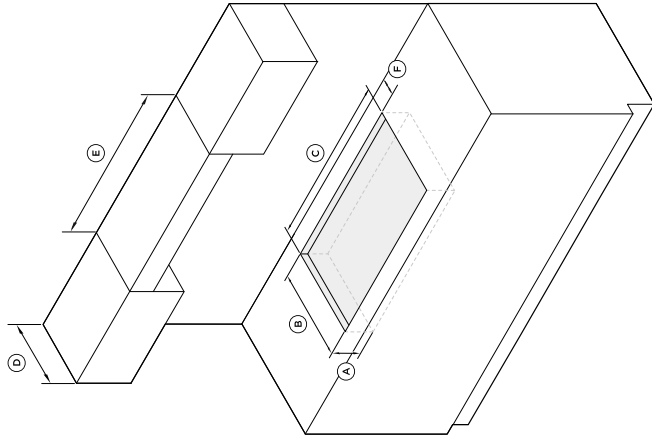

CABINERY DIMENSIONS	30" MODELS	
	IN	MM
A Min. height allowance	4	102
B Depth	19 3/4	502
C Width	28 5/8	727
D Max. depth of overhead cabinetry	13	330
E Min. width of ventilation hood required	30	762
F Min. distance from rear edge of cutout to nearest combustible surface	2	51

36" CUTOUT

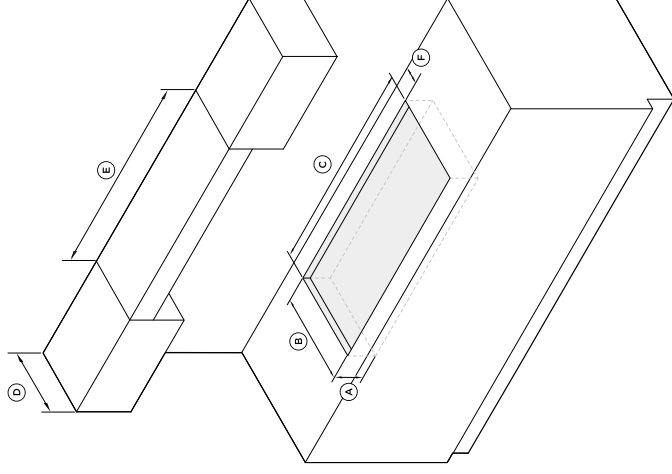

CABINERY DIMENSIONS	36" MODELS	
	IN	MM
A Min. height allowance	4	102
B Depth	19 3/4	502
C Width	34 3/4	883
D Max. depth of overhead cabinetry	13	330
E Min. width of ventilation hood required	36	914
F Min. distance from rear edge of cutout to nearest combustible surface	2	51