



<b>Modèle Sélectionné</b>	
Numéro de modèle	VB24SDEX1
<b>Apparence extérieure</b>	
Couleur	Acier inoxydable
Finition Extérieure	Couvercle en verre Panneau avant ajustable
<b>Dimensions</b>	
Hauteur (po)	5 1/2"
Largeur (po)	23 7/16"
Profondeur (po)	22 1/4"
<b>Caractéristiques</b>	
Capacité	0.3 Pi cu
Consommation Énergétique	110V /60Hz /10A
Indicateur entretien et humidité	Oui
Mode Veille	Oui
Niveaux de scellement	3 niveaux
Pression de la pompe	10 bar
Puissance de la pompe	150W
Retour Audio	Oui
Taille des sacs	9 7/16" x 13 3/4"
Tiroir " poussez pour ouvrir"	Oui
Type de Contrôle	Control intuitif tactile
<b>Apparence intérieure</b>	
Fin intérieure	Acier inoxydable
<b>Moulure d'encastrement (Optionnel)</b>	
Moulure encastrement	TK480NDB1
<b>Accessoires Inclus</b>	
Sacs hermétique sans BPA	100 sacs inclus
<b>Accessoires (Optionnels)</b>	
Poignée contemporaine fine	AHD5-OBDD60SB (fine noire 24") AHD5-OBDD60SX (Fine Inox 24")
Poignée contemporaine ronde	AHS-OBDD-60S (ronde inox 24")


**PRODUCT DIMENSIONS - 24" MINIMAL & CONTEMPORARY MODELS**

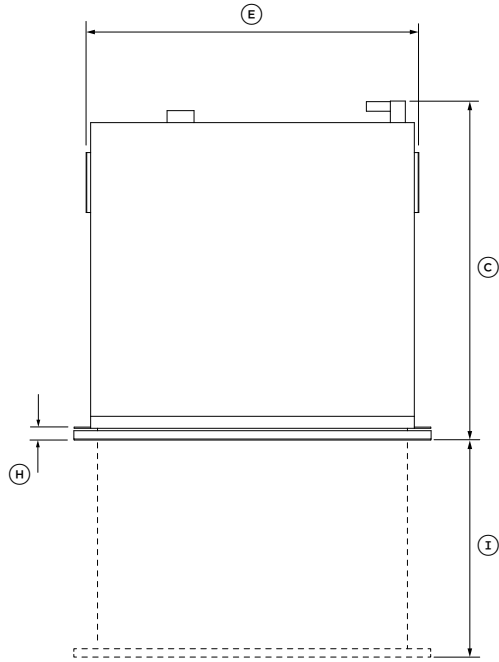


**PLAN**

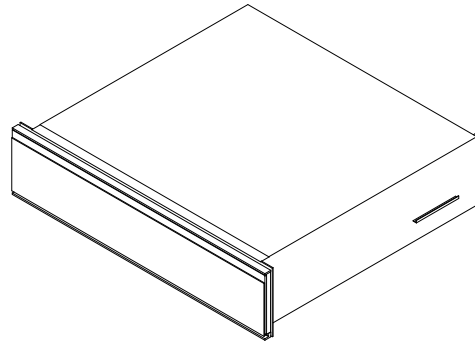

**ISOMETRIC**

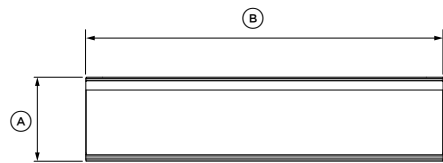

**FRONT**

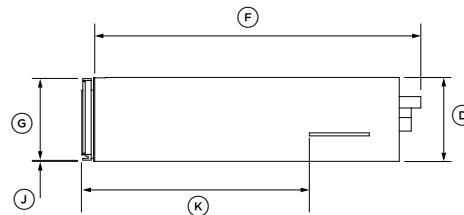

**PROFILE**

PRODUCT DIMENSIONS	VB24SD	
	IN	MM
Ⓐ Overall height of drawer	5 1/2	140
Ⓑ Overall width of drawer	23 7/16	596
Ⓒ Overall depth of drawer*	22 1/4	566
Ⓓ Height of chassis	5 1/2	140
Ⓔ Width of chassis**	21 7/8	556
Ⓕ Depth of chassis***	21 1/2	546
Ⓖ Height of drawer front panel	5 3/8	136
Ⓗ Depth of drawer front panel and flange	13/16	20
Ⓘ Depth of open drawer	16 5/16	414
Ⓙ Height from bottom of chassis to bottom of front panel	1/16	2
Ⓚ Depth from front of door to side bracket	15 1/8	384

\* Includes front panel and power plug

\*\* Includes side brackets

\*\*\*Includes power plug

PRODUCT WEIGHT	VB24SD	
	LBS	KG
Total weight of drawer*	84	38

\*including packaging

Actual product dimension may vary by ± 1/16 (2 mm).