



Jennair® Cuisinière bicombustible de style professionnel RISE™, 48 po

JDRP748HL

Finis/couleurs disponibles

JDRP748HL
Acier Inoxydable

Deux flammes précises produites par des brûleurs en laiton percés avec précision. À l'intérieur de la cavité du four, une chaleur constante circule autour de chaque tige plate. Qu'il s'agisse de saisir une coupe de viande de premier choix, de mijoter des sauces ou de réaliser de succulents rôtis, ces cuisinières offrent une puissance incomparable.

Caractéristiques clés

Centre culinaire JennAir®


Accès à distance


Brûleur superposé Power™ de 20 000 BTU

Guides et documentation:

 [CAD fichier](#)

 [Guide des dimensions](#)

 [Manuel d'installation](#)

 [Guides d'installation](#)

 [Renseignements sur la garantie](#)

| Dimensions | | Fiche technique | |
|------------|-------|------------------------------|-------------------------------|
| Profondeur | 29.81 | Matte Finish Vs Satin Finish | Finition Mate |
| Hauteur | 36.0 | Cast Iron Vs Porecelain | Grilles coulées en porcelaine |
| Largeur | 47.88 | | |

| Compatibilité | | Électricité | |
|---------------------|---|------------------------------|---------|
| Connectivité | WiFi; App; Accès à distance; Contrôlé par la voix | Ampères | 50 |
| Fonctionnement avec | Amazon Alexa; Android; Google Assistant; iOS | Cordon d'alimentation inclus | Oui |
| | | Volts | 240/208 |
| | | Hz | 60 |


| Fiche technique | | Extérieur | |
|-----------------------|----------------|------------------------|-----------------------|
| Fabriqué en | Les États-Unis | Couleur de la poignée | Acier inoxydable |
| UPC | 883049468624 | Matériau de la poignée | Métal |
| Accessoires en option | W11323012 | Type de poignée | Poignée de type barre |
| Dishwasher Safe | Oui | Porte amovible | Oui |

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE |
|--------------------------------------|---------------------|---------------------|
| Overall Width (A) | 29-7/8" (75.9 cm) | 35-7/8" (91.1 cm) |
| Bull nose Height (B) | 2-1/8" (5.4 cm) | 2-1/8" (5.4 cm) |
| Control Panel Height (C) | 7-1/2" (19.1 cm) | 7-1/2" (19.1 cm) |
| Door Height (D) | 20-11/16" (52.6 cm) | 20-11/16" (52.6 cm) |
| Door Bottom to Handle Top: RISE™ (E) | 20" (50.8 cm) | 20" (50.8 cm) |
| Door Bottom to Handle Top: NOIR™ (E) | 20-5/8" (52.4 cm) | 20-5/8" (52.4 cm) |
| Toe-Kick Height (F) | 6-11/16" (17 cm) | 6-11/16" (17 cm) |

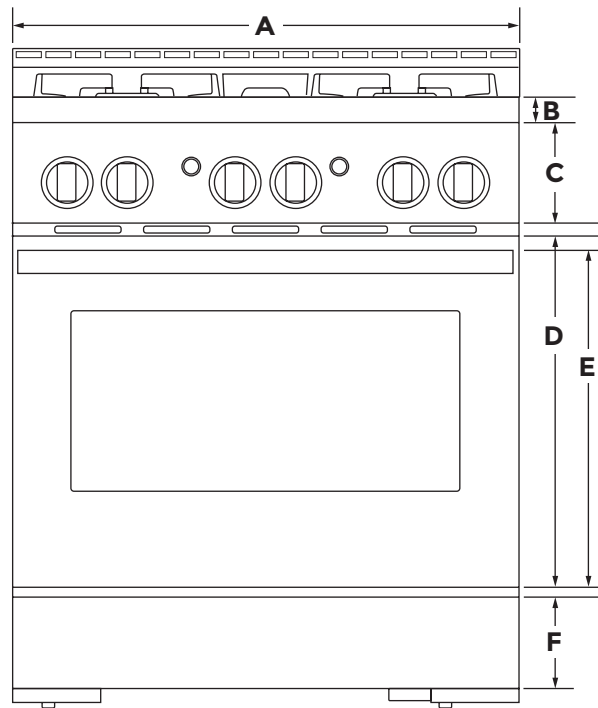

FRONT VIEW




IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|---------------------|
| Depth with Control Panel Overhang (G) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth with Handle: RISE™ (H) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with Handle: NOIR™ (H) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) |
| Depth with Door Fully Open (I) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) |

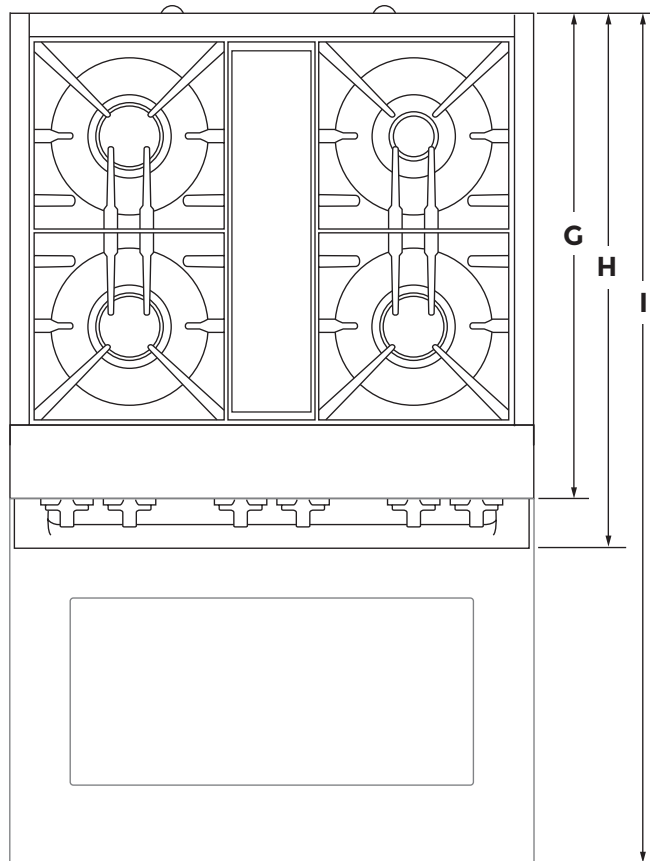


TOP VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|--|-----------------------------|---------------------|---------------------|
| Grates Top Height (A) | 37-5/16" (94.8 cm) | 37-5/16" (94.8 cm) | 37-5/16" (94.8 cm) |
| Cooking Surface Top Height (B) | 36" (91.4 cm) | 36" (91.4 cm) | 36" (91.4 cm) |
| Door Top Height (C) | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) |
| Handle Top Height: RISE™ (D) | 27" (68.6 cm) | 27" (68.6 cm) | 27" (68.6 cm) |
| Handle Top Height: NOIR™ (D) | 27-5/8" (70.2 cm) | 27-5/8" (70.2 cm) | 27-5/8" (70.2 cm) |
| Toe-Kick Height (E) | 6-11/16" (17 cm) | 6-11/16" (17 cm) | 6-11/16" (17 cm) |
| | OPTIONAL ACCESSORIES | | |
| Height to Top of 9" Stainless Steel Backsplash (F) | 45" (114.3) min. | 45" (114.3) min. | 45" (114.3) min. |

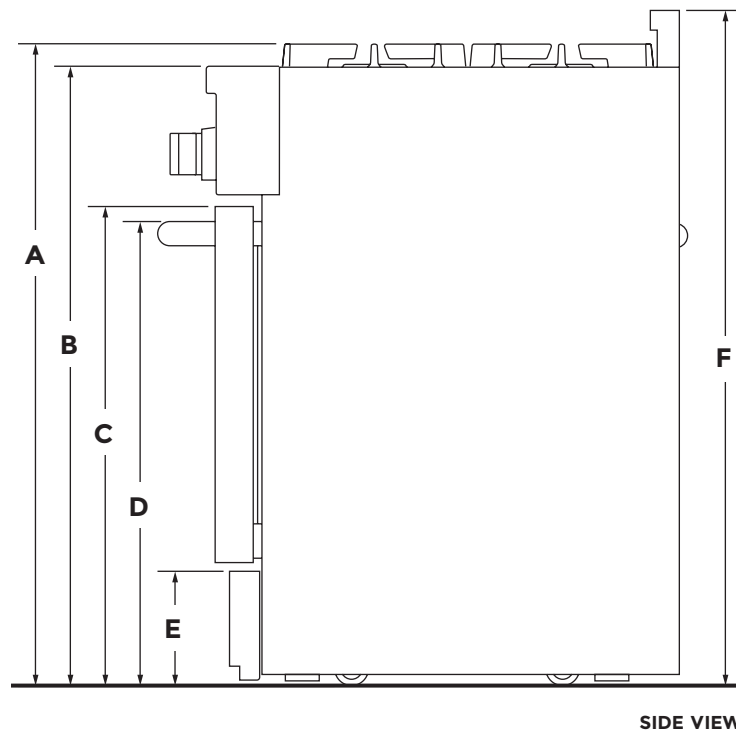


IMPORTANT: Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|---------------------|---------------------|
| Depth with Door Fully Open (G) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) |
| Depth with RISE™ Handle (H) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with NOIR™ Handle (H) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) |
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth to Toe-Kick with Door (J) | 26-3/8" (67 cm) | 26-3/8" (67 cm) | 26-3/8" (67 cm) |
| Depth with RISE™ Door (K) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) |
| Depth with NOIR™ Door (K) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) |

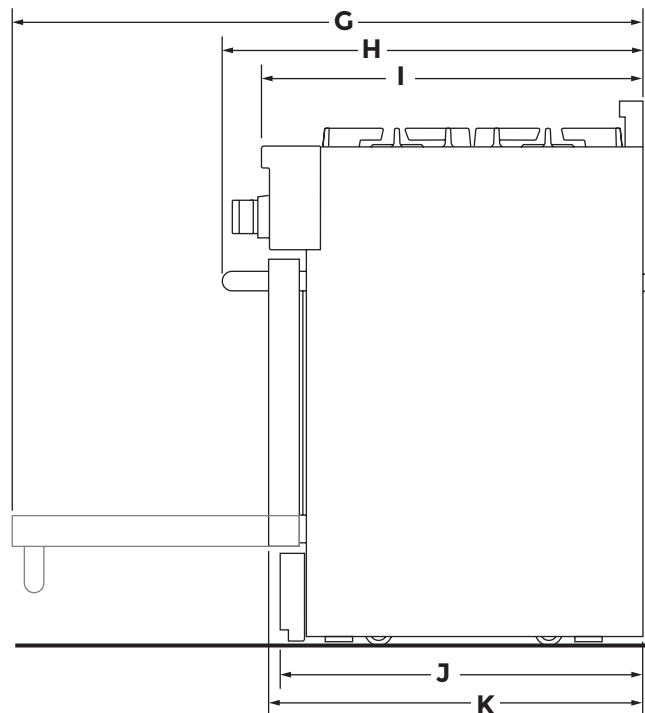


SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 48" DUAL-FUEL RANGE |
|---|---------------------|
| Overall Width (A) | 47-7/8" (121.6 cm) |
| Bull nose Height (B) | 2-1/8" (5.4 cm) |
| Control Panel Height (C) | 7-1/2" (19.1 cm) |
| Door Heights (D) | 20-11/16" (52.5 cm) |
| Door Bo ttoms to Handle Tops: RISE™ (E) | 20" (50.8 cm) |
| Door Bo ttoms to Handle Tops: NOIR™ (E) | 20-5/8" (52.4 cm) |
| Secondary Oven Door Width (F) | 17-3/4" (45.1 cm) |
| Main Oven Door Width (G) | 29-5/8" (75.2 cm) |
| Toe-Kick Height (H) | 6-11/16" (17 cm) |

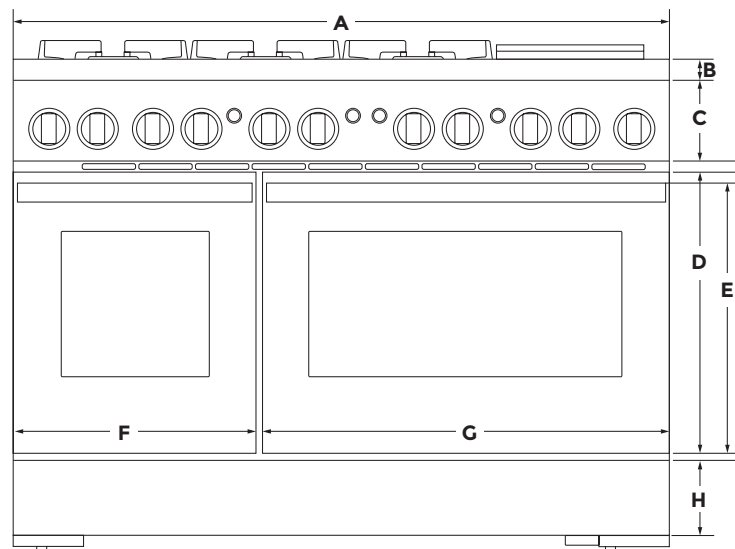


FRONT VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 48" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) |
| Depth with Handles: RISE™ (J) | 29-13/16" (75.7 cm) |
| Depth with Handles: NOIR™ (J) | 29-5/16" (74.5 cm) |
| Depth with Doors Fully Open (K) | 46-1/2" (118.1 cm) |

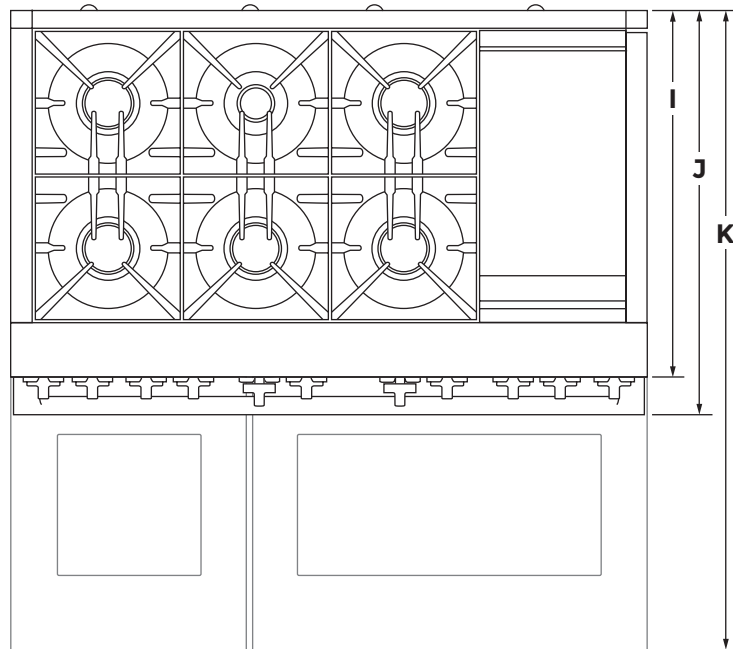

TOP VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---|---------------------|---------------------|---------------------|
| Combustible Area Above Cooking Surface Width (A) | 30" (76.2 cm) min. | 36" (91.4 cm) min. | 48" (121.9 cm) min. |
| Bottom of Cabinet Height Above Cooking Surface (B)* | 42" (106.7 cm) min. | 58" (147.3 cm) min. | 58" (147.3 cm) min. |
| Bottom of Cabinet Height Above Countertop (C) | 18" (38.1 cm) min. | 18" (45.7 cm) min. | 18" (45.7 cm) min. |
| Distance to Fixed Wall or Combustible Material (D) | 12" (30.5 cm) min. | 12" (30.5 cm) min. | 12" (30.5 cm) min. |
| Opening Width (E) | 30" (76.2 cm) min. | 36" (91.4 cm) min. | 48" (121.9 cm) min. |

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

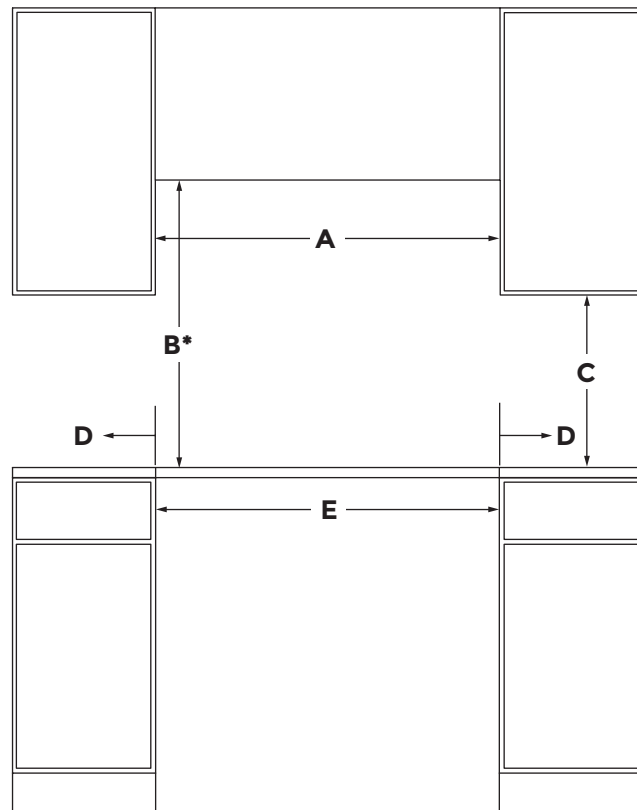

FRONT VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|-------------------------|----------------------|----------------------|----------------------|
| Upper Cabinet Depth (F) | 13" (33 cm) max. | 13" (33 cm) max. | 13" (33 cm) max. |
| Depth to Wall (G)* | 1-1/2" (3.8 cm) min. | 1-1/2" (3.8 cm) min. | 1-1/2" (3.8 cm) min. |

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required.

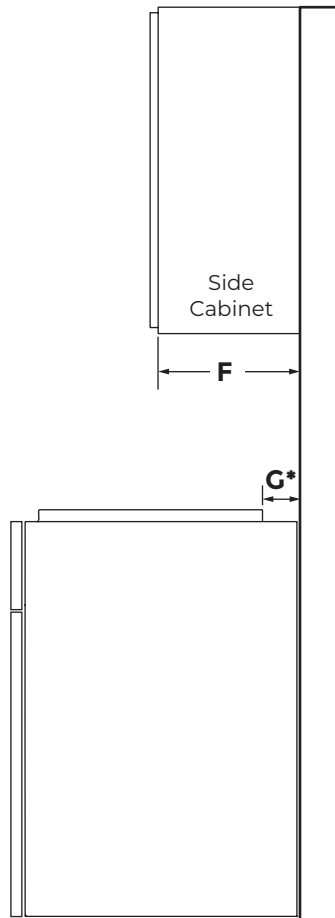

SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


ELECTRICAL REQUIREMENTS

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|----------------------------|---------------------|---------------------|---------------------|
| Electrical Zone Width (A) | 22" (55.9 cm) | 28" (71.1 cm) | 40" (101.6 cm) |
| Electrical Zone Height (B) | 15" (38.1 cm) | 15" (38.1 cm) | 15" (38.1 cm) |
| Electrical Zone Depth (C) | 5" (12.7 cm) | 5" (12.7 cm) | 5" (12.7 cm) |


ELECTRIC REQUIREMENTS CHECKLIST

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

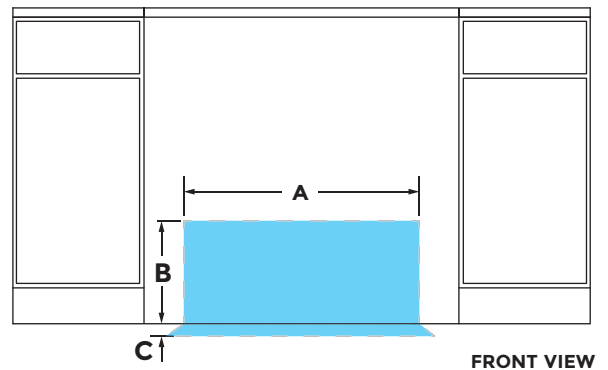

WIDTH TO ELECTRICAL CONDUIT

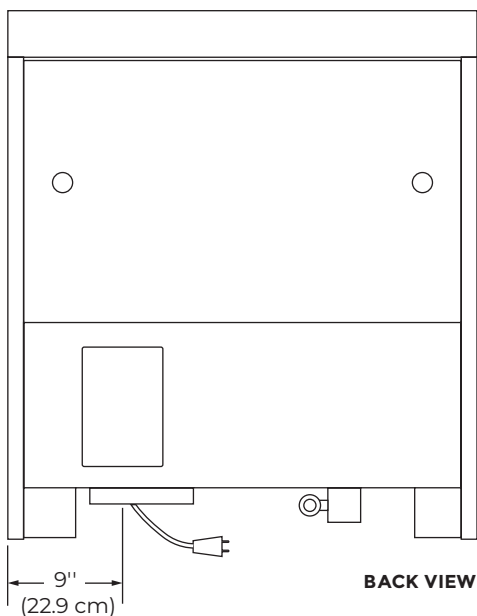

IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


GAS REQUIREMENTS

| | 30" CONNECTED DUAL-FUEL RANGE | 36" CONNECTED DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---|-------------------------------|-------------------------------|---------------------|
| Gas Opening Width (A) | 6" (15.2 cm) | 14" (35.6 cm) | 24" (61 cm) |
| Gas Opening Height (B) | 3" (7.6 cm) | 3" (7.6 cm) | 3" (7.6 cm) |
| Gas Opening Depth (C) | 5" (12.7 cm) | 5" (12.7 cm) | 5" (12.7 cm) |
| Distance from Side Cabinet to Gas Opening (D) | 6" (15.2 cm) | 6" (15.2 cm) | 6" (15.2 cm) |
| Width to Gas Inlet (E) | 12-3/4" (32.4 cm) | 12-3/4" (32.4 cm) | 12-3/4" (32.4 cm) |

RECOMMENDED GAS ZONE

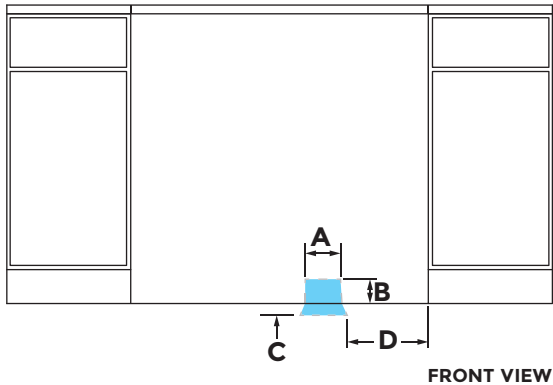

WIDTH TO GAS INLET

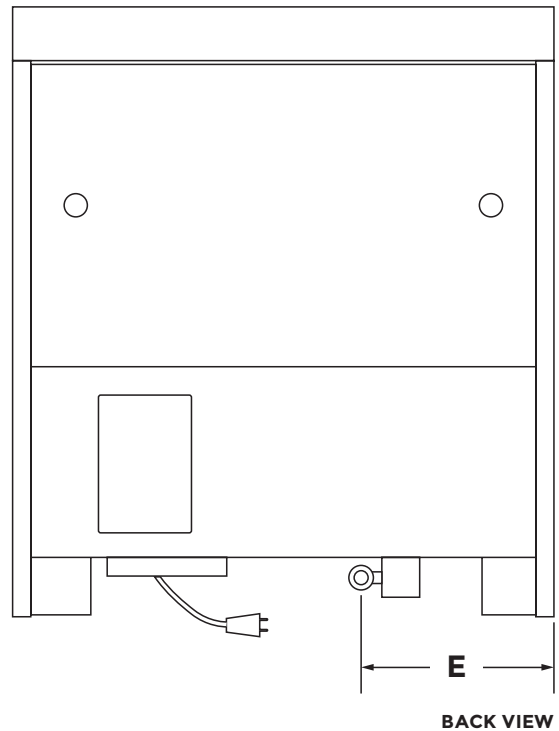

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.