



Jennair® RISE™ 48" Dual-Fuel Professional Range with Chrome-Infused Griddle and Gas Grill

JDRP748HL

Available Finishes/Colours



JDRP748HM
Floating Glass Black



JDRP748HL
Stainless Steel

Precise, dual flames produced by precision-drilled brass burners. Inside the oven cavity, steady heat weaves around each flat tine. From searing select cuts and simmering sauces to succulent roasts, these ranges offer unmistakable firepower.

Top Features

Remote Access

Halo-Effect Knobs

Cast Iron Grates

Manuals & Literature:



[Dimension Guide](#)



[Installation Instruction](#)



[Owners Manual](#)



[Warranty Information](#)


| Dimensions | | Details | |
|--------------------------|---------------------------|-----------------------------------|----------------------|
| Depth | 29.81 | Convection Element Power Watts | 2800 |
| Height | 36.0 | Broiler Location | Top of Oven |
| Width | 47.88 | Number Of Rack Guides | 5 |
| Details | | Bake Element Power | 3000W |
| Broiler Element Power | 1667W | Automatic Shut Off | No |
| Number Of Oven Racks | 3 | Rack Guide Type | Molded |
| Number Of Oven Lights | 2 Left / 3 Right | Oven Rack Type | Gliding Roll- Out |
| Interior Color | Black | Oven Light Type | Halogen |
| Hidden Bake Element | Yes | Oven Light Switch Location | Oven Control |
| Cooktop Surface Material | Porcelain Coated Steel | | |
| Convection Functions | Bake; Broil; Roast | | |
| Convection Element Type | Dual Fan | | |

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE |
|--------------------------------------|---------------------|---------------------|
| Overall Width (A) | 29-7/8" (75.9 cm) | 35-7/8" (91.1 cm) |
| Bull nose Height (B) | 2-1/8" (5.4 cm) | 2-1/8" (5.4 cm) |
| Control Panel Height (C) | 7-1/2" (19.1 cm) | 7-1/2" (19.1 cm) |
| Door Height (D) | 20-11/16" (52.6 cm) | 20-11/16" (52.6 cm) |
| Door Bottom to Handle Top: RISE™ (E) | 20" (50.8 cm) | 20" (50.8 cm) |
| Door Bottom to Handle Top: NOIR™ (E) | 20-5/8" (52.4 cm) | 20-5/8" (52.4 cm) |
| Toe-Kick Height (F) | 6-11/16" (17 cm) | 6-11/16" (17 cm) |

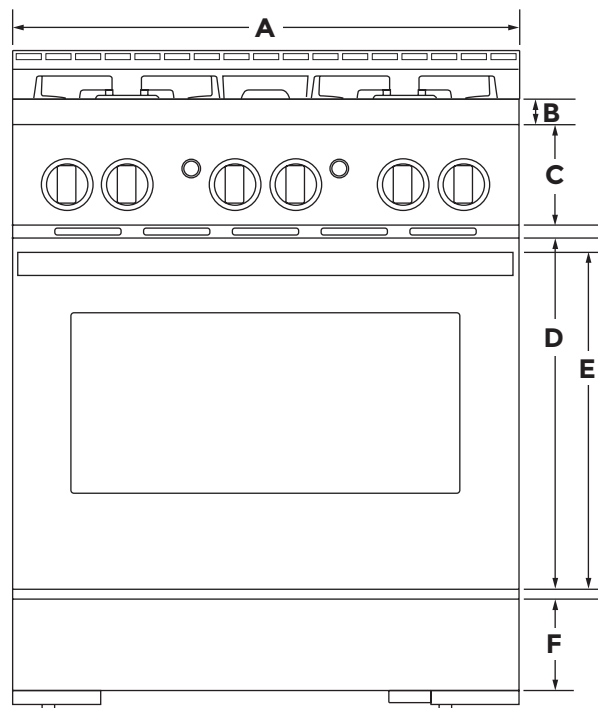

FRONT VIEW




IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|---------------------|
| Depth with Control Panel Overhang (G) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth with Handle: RISE™ (H) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with Handle: NOIR™ (H) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) |
| Depth with Door Fully Open (I) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) |

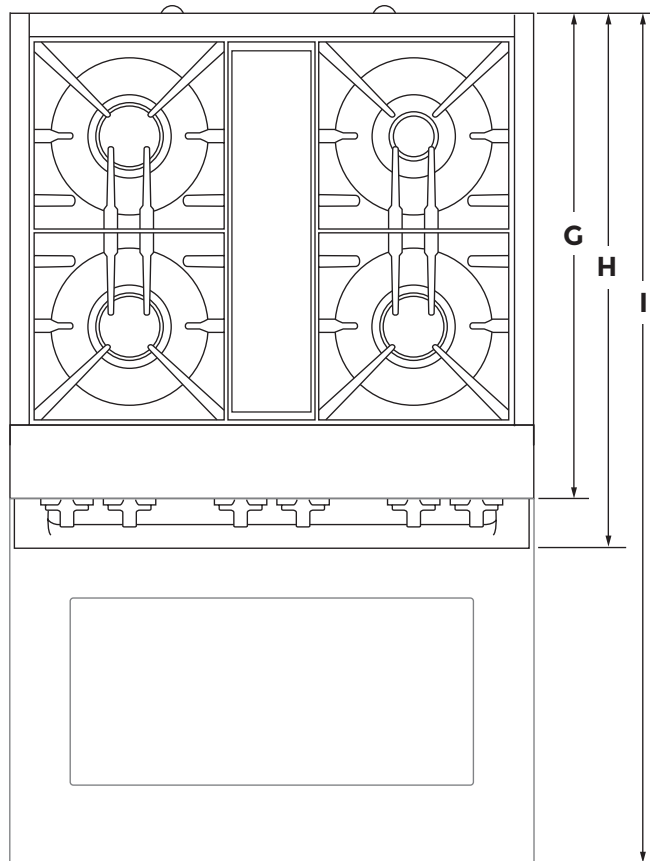


TOP VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|--|-----------------------------|---------------------|---------------------|
| Grates Top Height (A) | 37-5/16" (94.8 cm) | 37-5/16" (94.8 cm) | 37-5/16" (94.8 cm) |
| Cooking Surface Top Height (B) | 36" (91.4 cm) | 36" (91.4 cm) | 36" (91.4 cm) |
| Door Top Height (C) | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) |
| Handle Top Height: RISE™ (D) | 27" (68.6 cm) | 27" (68.6 cm) | 27" (68.6 cm) |
| Handle Top Height: NOIR™ (D) | 27-5/8" (70.2 cm) | 27-5/8" (70.2 cm) | 27-5/8" (70.2 cm) |
| Toe-Kick Height (E) | 6-11/16" (17 cm) | 6-11/16" (17 cm) | 6-11/16" (17 cm) |
| | OPTIONAL ACCESSORIES | | |
| Height to Top of 9" Stainless Steel Backsplash (F) | 45" (114.3) min. | 45" (114.3) min. | 45" (114.3) min. |

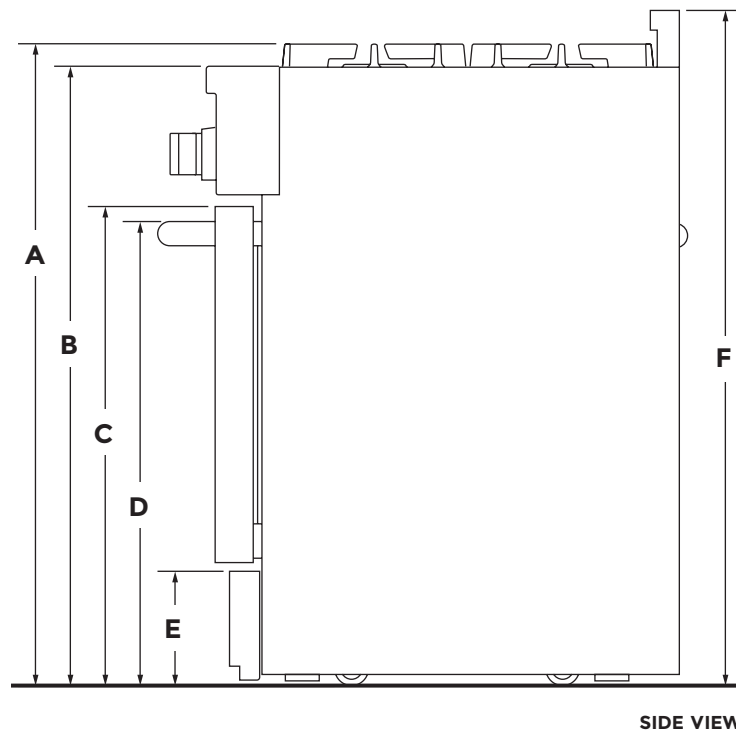


IMPORTANT: Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|---------------------|---------------------|
| Depth with Door Fully Open (G) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) |
| Depth with RISE™ Handle (H) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with NOIR™ Handle (H) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) |
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth to Toe-Kick with Door (J) | 26-3/8" (67 cm) | 26-3/8" (67 cm) | 26-3/8" (67 cm) |
| Depth with RISE™ Door (K) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) |
| Depth with NOIR™ Door (K) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) |

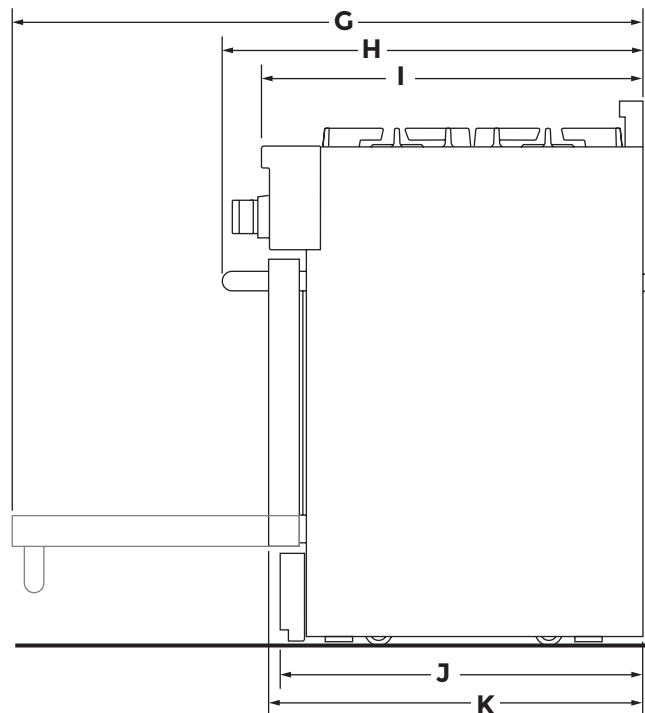


SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 48" DUAL-FUEL RANGE |
|--|---------------------|
| Overall Width (A) | 47-7/8" (121.6 cm) |
| Bull nose Height (B) | 2-1/8" (5.4 cm) |
| Control Panel Height (C) | 7-1/2" (19.1 cm) |
| Door Heights (D) | 20-11/16" (52.5 cm) |
| Door Bottoms to Handle Tops: RISE™ (E) | 20" (50.8 cm) |
| Door Bottoms to Handle Tops: NOIR™ (E) | 20-5/8" (52.4 cm) |
| Secondary Oven Door Width (F) | 17-3/4" (45.1 cm) |
| Main Oven Door Width (G) | 29-5/8" (75.2 cm) |
| Toe-Kick Height (H) | 6-11/16" (17 cm) |

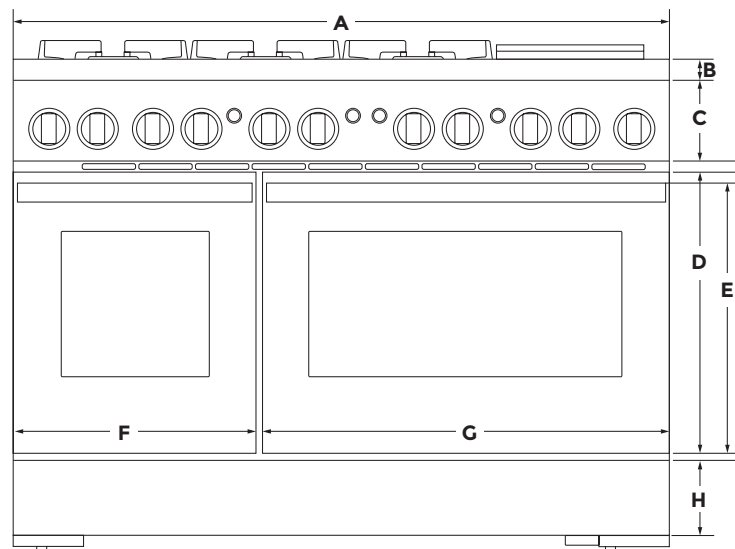


FRONT VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES PRODUCT

| | 48" DUAL-FUEL RANGE |
|---------------------------------------|---------------------|
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) |
| Depth with Handles: RISE™ (J) | 29-13/16" (75.7 cm) |
| Depth with Handles: NOIR™ (J) | 29-5/16" (74.5 cm) |
| Depth with Doors Fully Open (K) | 46-1/2" (118.1 cm) |

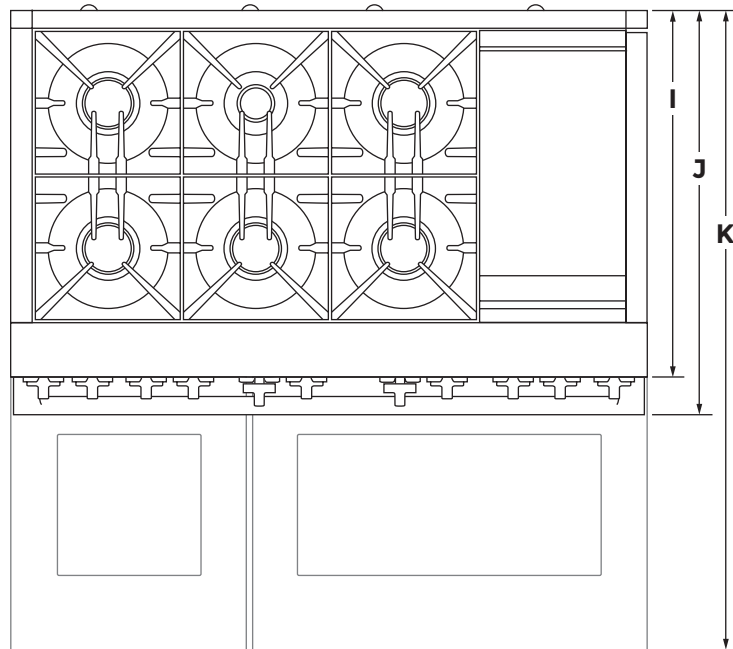

TOP VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---|---------------------|---------------------|---------------------|
| Combustible Area Above Cooking Surface Width (A) | 30" (76.2 cm) min. | 36" (91.4 cm) min. | 48" (121.9 cm) min. |
| Bottom of Cabinet Height Above Cooking Surface (B)* | 42" (106.7 cm) min. | 58" (147.3 cm) min. | 58" (147.3 cm) min. |
| Bottom of Cabinet Height Above Countertop (C) | 18" (38.1 cm) min. | 18" (45.7 cm) min. | 18" (45.7 cm) min. |
| Distance to Fixed Wall or Combustible Material (D) | 12" (30.5 cm) min. | 12" (30.5 cm) min. | 12" (30.5 cm) min. |
| Opening Width (E) | 30" (76.2 cm) min. | 36" (91.4 cm) min. | 48" (121.9 cm) min. |

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

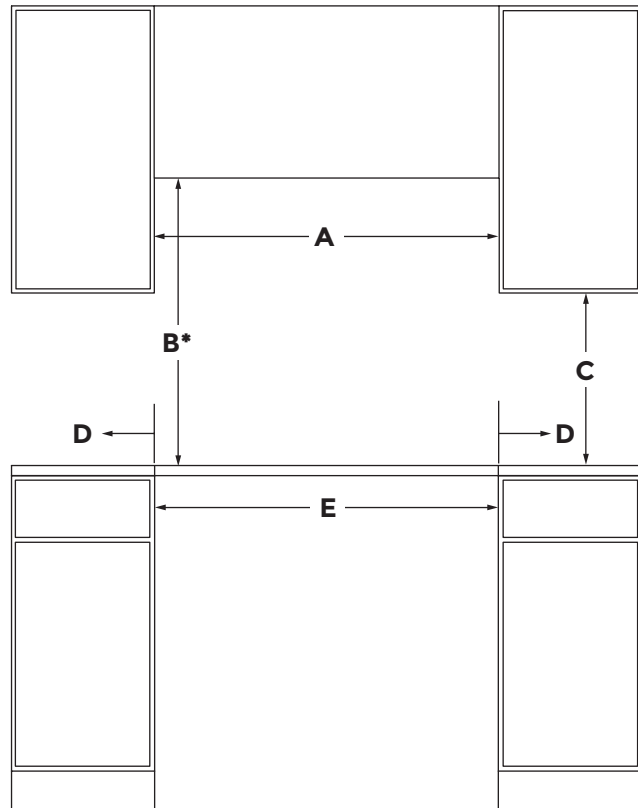

FRONT VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|-------------------------|----------------------|----------------------|----------------------|
| Upper Cabinet Depth (F) | 13" (33 cm) max. | 13" (33 cm) max. | 13" (33 cm) max. |
| Depth to Wall (G)* | 1-1/2" (3.8 cm) min. | 1-1/2" (3.8 cm) min. | 1-1/2" (3.8 cm) min. |

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required.

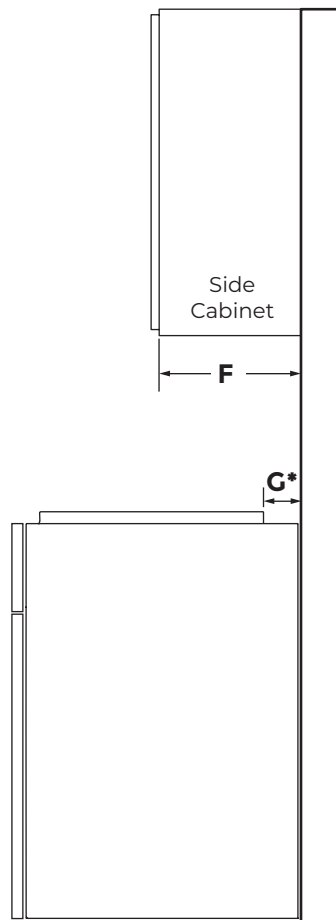

SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


ELECTRICAL REQUIREMENTS

| | 30" DUAL-FUEL RANGE | 36" DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|----------------------------|---------------------|---------------------|---------------------|
| Electrical Zone Width (A) | 22" (55.9 cm) | 28" (71.1 cm) | 40" (101.6 cm) |
| Electrical Zone Height (B) | 15" (38.1 cm) | 15" (38.1 cm) | 15" (38.1 cm) |
| Electrical Zone Depth (C) | 5" (12.7 cm) | 5" (12.7 cm) | 5" (12.7 cm) |


ELECTRIC REQUIREMENTS CHECKLIST

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

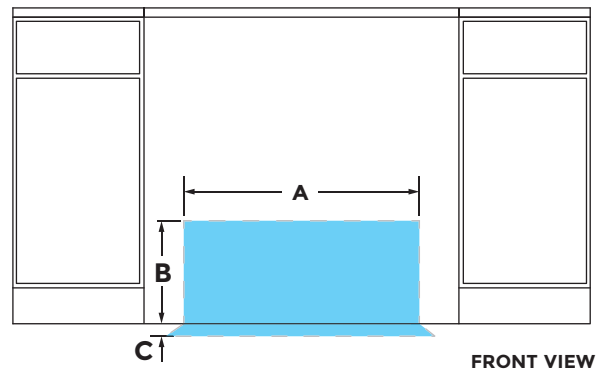

WIDTH TO ELECTRICAL CONDUIT

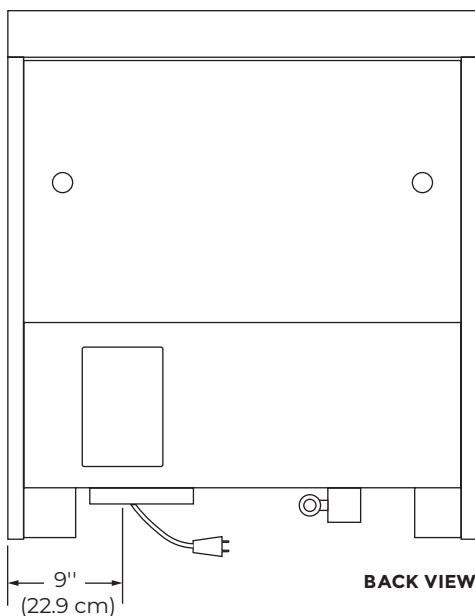

? IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


GAS REQUIREMENTS

| | 30" CONNECTED DUAL-FUEL RANGE | 36" CONNECTED DUAL-FUEL RANGE | 48" DUAL-FUEL RANGE |
|---|-------------------------------|-------------------------------|---------------------|
| Gas Opening Width (A) | 6" (15.2 cm) | 14" (35.6 cm) | 24" (61 cm) |
| Gas Opening Height (B) | 3" (7.6 cm) | 3" (7.6 cm) | 3" (7.6 cm) |
| Gas Opening Depth (C) | 5" (12.7 cm) | 5" (12.7 cm) | 5" (12.7 cm) |
| Distance from Side Cabinet to Gas Opening (D) | 6" (15.2 cm) | 6" (15.2 cm) | 6" (15.2 cm) |
| Width to Gas Inlet (E) | 12-3/4" (32.4 cm) | 12-3/4" (32.4 cm) | 12-3/4" (32.4 cm) |

RECOMMENDED GAS ZONE

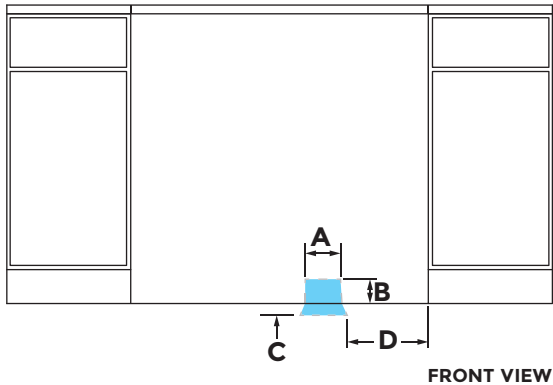

WIDTH TO GAS INLET

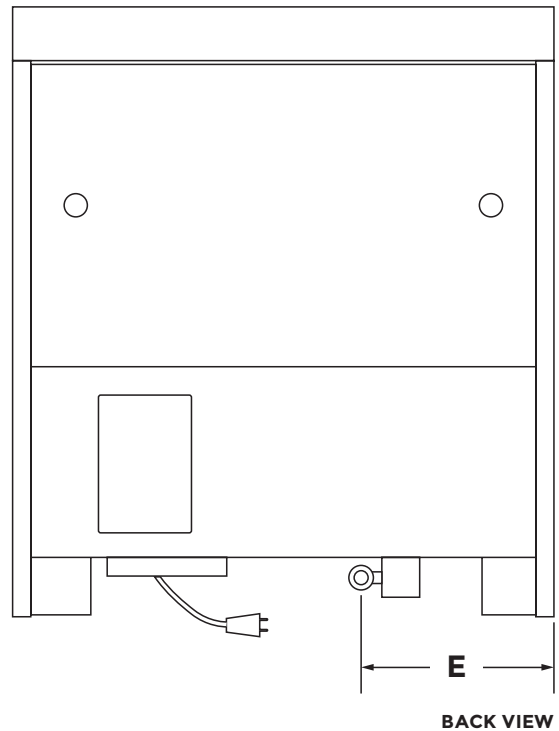

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.