



AGArangeusa.com

36" ELISE INDUCTION RANGE

MODEL: **AEL361IN**



In the re-imagining of the classic Elise design, AGA took its cues from the modern farmhouse movement itself. Rustic yet refined, the Elise blends old and new in masterful ways, both fresh and timeless, with just a hint of the exquisite.

Complimented by stunning new cruciform knobs with knurling, shipped standard in Brushed Nickel, but also available as after-market options in four additional versatile hardware finishes (Polished Chrome, Polished Brass, Polished Copper, and Brushed Brass), the re-imagined AGA Elise confidently steps into the spotlight along side its classic AGA siblings.



BRUSHED NICKEL
(STANDARD)



POLISHED CHROME



POLISHED BRASS



POLISHED COPPER



BRUSHED BRASS

SPECIFICATIONS

- Product Dimensions: 35 1/2" W x 27 5/8" D x 36" H
- Shipping weight (lbs): 390lbs *(includes range, crate & pallet)*

WARRANTY

- 2 Year Warranty on parts and labor with exception of cosmetic damage

FINISHES

NOTE: Colors not in stock could have a 4-12 week lead time (check for availability)



WHITE (WHT)



IVORY (IVY)



MIDNIGHT SKY (SKY)




GLOSS BLACK (BLK)



MATTE BLACK (MBL)



STAINLESS STEEL (SS)

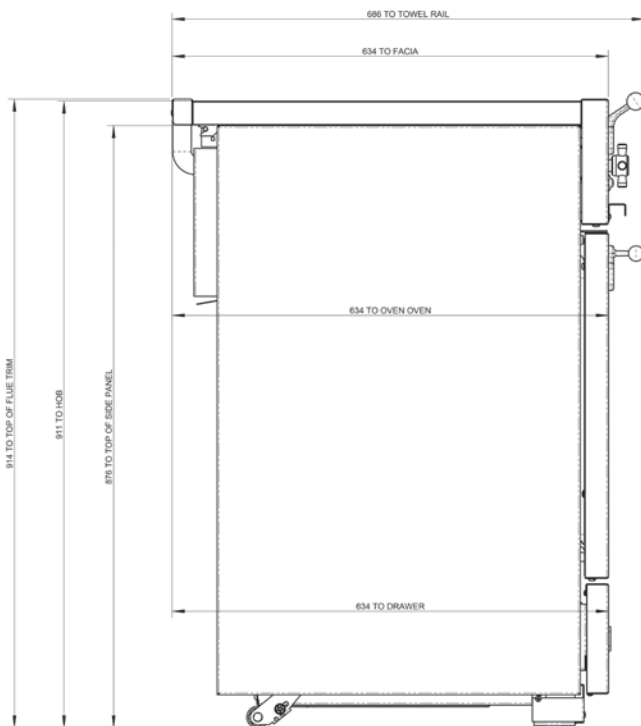



AGArangeusa.com

36" ELISE INDUCTION RANGE

General Properties

Total Oven Capacity	4.5 cu. ft.
Usable Oven Space	28" W x 14" D x 14 ½" H
Cooking Mode	Multi-function Oven with 7 Cooking Modes
Cleaning Type	EasyClean™ Enamel
Controls	Knobs on fascia
Sealed Burners	Yes

Cooktop Performance

Cooktop Dimensions	35 ½" W x 21 ⅜" D
Number of Burners	5
Power of Left Front Burner	Boost: 2.2kW, Maximum Non Boost 1.4kW
Power of Back Left Burner BTU	Boost: 3.0kW, Maximum Non Boost 1.85kW
Power of Center Burner BTU	Boost: 3.7kW, Maximum Non Boost 2.3kW
Power of Front Right Burner BTU	Boost: 3.0kW, Maximum Non Boost 1.85kW
Power of Back Right Burner BTU	Boost: 3.0kW, Maximum Non Boost 1.85kW

Electrical Details

Circuit Breaker (A)	45 A* (15.1kW)
Volts (V)	240V
Frequency (Hz)	60Hz
Plug Type	4-prong NEMA 14-50P
Power Cord Length	50"
Energy Source	Electric Oven and Electric Hotplate

OVEN FEATURES

- Multifunction oven with 7 settings including true European dual-convection cooking, fan-assisted baking, browning, thaw & serve, convection broiling, warming and conventional cooking
 - Large 4.5 cu. ft. oven
 - Two robust telescopic glide-out racks
 - Dual broiler system
- Includes cookware accessories
 - One Pastry Tray

COOKTOP FEATURES

- Ceramic glass surface cooktop with five induction burners and integrated capacitive touch controls efficiently utilizes, transfers, and captures 90% of energy generated, as compared to only 55% with that of a traditional gas burner.
- Stunning new cruciform knobs with knurling, available in a selection of versatile hardware finishes
- Convenient storage drawer stores cookware and even oven racks

Dimensions & Weights

Appliance Dimensions	35 ½" W x 27 ⅝" D x 36" H
Depth with Door Open	44 ⅝"
Weight	306 lbs.
Shipping Weight	390 lbs.
Package Dimensions	49 ¼" W x 31" D x 46 ½" H

Accessories Included

2 x Telescopic rack with runners 1 pastry tray	Toe kick Anti-tip device Handrail
---	---

* Load demand diversity calculation according to NFPA 70 article 220.

Note: The maximum input at any time is given as both ovens fanned and broiler, plus cooling fan.



AGArangeusa.com

36" ELISE INDUCTION RANGE

Installation Clearance Dimensions

A - Gap between side of appliance and adjacent vertical surface ABOVE cooktop level	1 $\frac{3}{16}$ "
B - Gap between side of appliance and adjacent vertical surface BELOW cooktop level	$\frac{3}{16}$ " (U.S.) $\frac{1}{2}$ " (Canada)
C - Gap between cooktop level and any horizontal combustible surface	31 $\frac{1}{2}$ "
D - Maximum depth of cabinets installed above the top surface cooking sections	13"
E - Minimum distance between horizontal surfaces less than dimension C	35 $\frac{1}{2}$ " (U.S.) 36 $\frac{3}{8}$ " (Canada)
F - Minimum distance between horizontal cabinets and worktop surfaces adjacent to range	16 $\frac{5}{32}$ "

