


SC7751

Freestanding / Semi Built-in

LIEBHERR

Refrigeration and Freezing



home.liebherr.com

SC7751	
Energy consumption (kWh / y)	354
Estimated Yearly Energy Cost in US \$	50
Sound rating dB(A)	35
Total capacity cu.ft. (l)	16.8 (477)
Refrigerator capacity cu.ft. (l)	12 (339)
Freezer capacity cu. ft. (l)	4.9 (139)
Electronic control	Touch & swipe display
Defrost type	Automatic
Interior light	LightTower
Number of shelves	6 + Variosafe
Number of door racks	2 + VarioBox
Number of EasyFresh drawers	1
Number of freezer drawers	3
Refrigerator Temperature range °F (°C)	34 to 46°F (2 to 9°C)
Freezer temperature range °F (°C)	5 to -15°F (-15 to -26°C)
Internal Water Dispenser	No
Water filter	No
IceMaker	EasyTwist-Ice
Ice cube output lbs. (kg)/24h	20 ice cubes per batch
Ice cube stock lbs. (kg)	40 ice cubes
Door hinges	Left, reversible
Product dimensions	
in inch (H / W / D)	79 5/16/ 29 3/8 / 26 5/8
in cm (H / W / D)	201.5 / 74.5 / 67.5
Cut out dimensions	
in inch (H / W / D)	80 / 30 / 24
in cm (H / W / D)	203.2 / 76.2 / 60.9
Net weight lbs. (kg)	229.7 (104)
Voltage V / Hz	115/60

This model can be installed Side-by-side with SCB7760IM along with the original door swing

* Energy Cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 14 cents per KWh.

** Noise output – according to EN 60704-3

(08/2026)



Accessories

FreshAir activated carbon filter	9882460
Side By Side kit	9905353
60" Top Ventilation grill for Side by Side Installation	9903656
30" Top Ventilation grill	9903844

Features

Duo Cooling

DuoCooling independent refrigeration systems provide precise temperature control and superior performance, efficiency and food preservation.

Easy Fresh

The guarantee of market freshness in your home. Whether it's unpackaged vegetables or fruit, Easy Fresh ensures that your food is preserved for a longer period of time.

Power Cooling

The fan – as powerful as it is quiet – distributes the cold air efficiently throughout the entire refrigeration compartment.

Light Tower

Enjoy an optimally illuminated interior: the LightTower shows off your food and is positioned so that your fully stocked refrigerator is illuminated at all times. The flush mounting of the LightTower in the side walls means there is also more space for your food.

Super Silent

Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound absorbing compressors.

Vario Temp

VarioTemp means you have plenty of scope when storing food in your fridge freezer. This is because you can also set the accurate temperature in the freezer compartment in a range between 28°F to 57°F (-2°C to 14°C) – and therefore also use this compartment as a further cooling zone.


Smart Steel

SmartSteel finish significantly reduces the visibility of fingerprints, is easy to clean, and is scratch resistant.

Smart Device Box

Want to be prepared for the future of the Smart Home? The SmartDeviceBox can be installed in just a few steps and will open up the whole world of digital possibilities to you today.

Product Dimensions

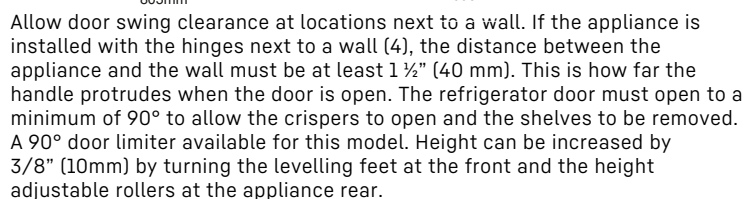[illegible]

without ventilation grille: 80" (2032 mm)
with ventilation grille: 84" (2132mm)

Electrical outlet location

30° (762 mm)

9-11/16" (245 mm)

5-13/16" (148 mm)

max. 89" (2260 mm)

The power cord exists the rear of the appliances (A) right side and has a length of 6.5 ft (2m). We suggest the electrical outlet not to be located behind the appliance, so it is easily accessible. This can be located on top of the niche like shown on the image.

Figure 1 illustrates the assembly of the Biorad 4850 Cryo-EM grid support. The figure is divided into four panels: A, B, C, and D. Panel A shows a perspective view of the grid support (1) being placed into the cryo-EM grid (2). Panel B shows a perspective view of the grid support (3) being placed into the cryo-EM grid (4). Panel C shows a perspective view of the grid support (5) being placed into the cryo-EM grid (6). Panel D shows a side view of the cryo-EM grid (7) with the grid support (8) and the cryo-EM grid (9). The side view shows the grid support (8) is 1-1/2 IN MIN (38 mm) thick. The cryo-EM grid (9) is labeled 'Cabinet' and 'Refrigerator'.

Be sure to consider the possibility of having to raise some of the leveling legs in order to level the appliance when installing. If you adjust the height of the appliance – it will effectively reduce air flow. Therefore leave yourself some room for adjustment. The appliance is designed to allow proper air flow when installed up against the wall.