CORE

GUST II

UNDER-CABINET

ACT™

ZEPHYR


ZEPHYRONLINE.COM

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	290 - 600	290 - 390	290 - 290
Min. - Max. Sones	2 - 7		


*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.






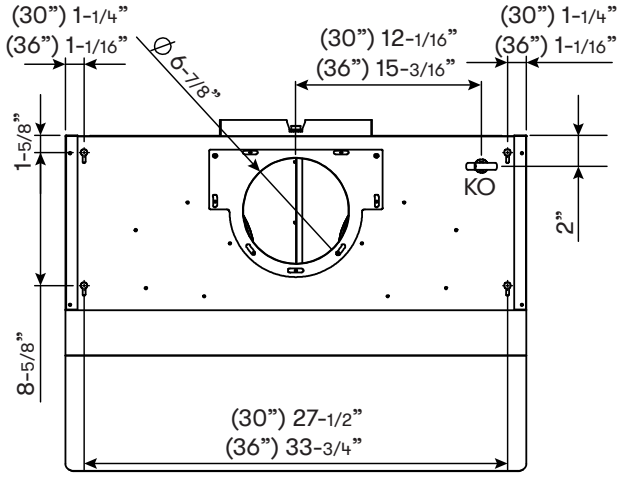

TOP

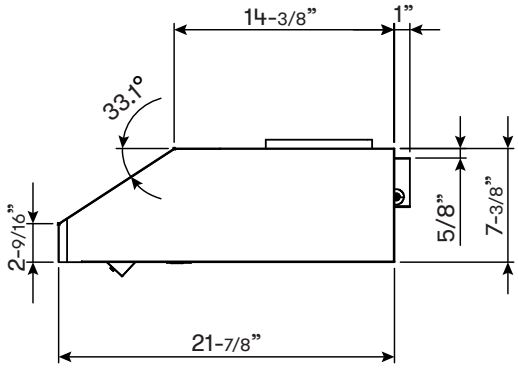

SIDE

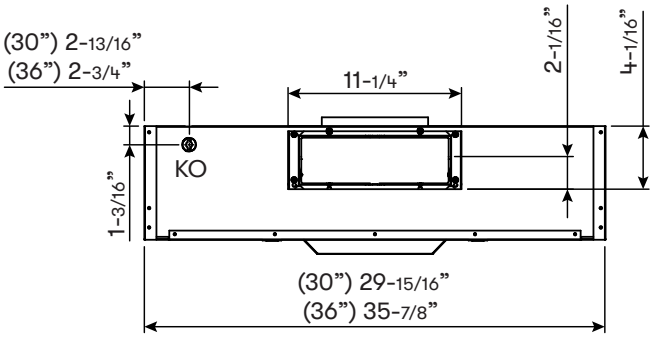

BACK

MODEL		
Stainless Steel	AK7200BS	AK7236BS
Size	30”	36”
BLOWER PERFORMANCE		
Blower CFM (Min. - Max.)	290 - 600	290 - 600
Sones (Min. - Max.)	2 - 7	2 - 7
ACT 390 CFM (Min. - Max.)	290 - 390	290 - 390
ACT 290 CFM (Min. - Max.)	290 - 290	290 - 290
FEATURES		
ACT™ Technology	390, 290	390, 290
Controls	Electronic Touch	Electronic Touch
Speed Levels	3*	3*
Auto Delay-Off	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2
Dual-Level Lighting	Yes	Yes
Filters	Hybrid Baffle x2	Hybrid Baffle x2
DUCT SPECIFICATIONS		
Vertical Internal Blower	7” Round or 3-1/4” x 10”	7” Round or 3-1/4” x 10”
Horizontal Internal Blower	3-1/4” x 10”	3-1/4” x 10”
AC POWER	120V, 60Hz at Max. 2A	120V, 60Hz at Max. 2A
OPTIONAL ACCESSORIES		
Stainless Steel Telescopic Backsplash	AK1710	AK1716
Make-Up Air Kit	MUA006A	MUA006A
Damper, 7” Round	AK00067	AK00067
MOUNTING HEIGHT RANGE**	24” - 32”	24” - 32”
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 2 speeds and ACT 290 CFM = 1 speed.
**Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.

ACT™ **Airflow Control Technology™ (ACT™)**
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.