

Whirlpool® 18 Cu. Ft. Top Freezer Refrigerator Any-Room-Ready

WRTX4418TZ

Available Finishes/Colours

- WRTX4418TB Black
- WRTX4418TZ Stainless Steel Finish
- WRTX4418TW White

Get flexible storage that meets the moment with this Top Freezer Refrigerator, made to handle any room from garage to basement. Make room for tall items with the Flexi-Slide™ Deli Drawers. Select the perfect humidity for your food with the FreshSpace™ Humidity Control Crispers. And choose how it opens with a reversible door option.

Top Features

- **Any-Room-Ready**
- **Flexi-Slide™ Deli Drawer**
- **FreshSpace™ Humidity-Controlled Crispers**

Manuals & Literature:

Dimension Guide | Energy Guide | Owners Manual | Warranty Information

Dimensions

Depth	29.25
Height	66.63
Width	29.38

Freezer Compartment

Shelves	1 Adjustable Full-Width Glass
Door Bins	2 Fixed Full-Width
Door Type	Swing
Freezer Number Of Shelves	1 Adjustable Full-Width Glass
Light	No

Refrigerator Compartment

Conventional Shelves	1 Fixed Full-Width Glass; 2 Adjustable Full-Width Glass
Deli Drawer	1 Flexi-Slide Bin
Door Bins	1 Fixed Full-Width; 1 Fixed Partial-Width; 2 Fixed Full-Width Gallon

Refrigerator Compartment

Humidity Controlled Drawers	Yes
Lighting	LED
Liner Finish	White Glossy
Non Climate Control Drawers	
Number Of Interior Shelves	4
Pantry Drawer	No
Spill Proof Glass Shelves	No
Supplementary Containers	
Temperature Controlled Drawers	No

Exterior

Handle Color	Gray
Handle Material	Plastic
Handle Type	Pocket Handle
Hidden Hinge	No

Whirlpool

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


TOP MOUNT REFRIGERATOR


PRODUCT MODEL NUMBERS

WRTX4418TB
WRTX4418TW
WRTX4418TZ
WRTX5418TB
WRTX5418TW
WRTX5418TZ

Electrical: A 115V, 60Hz, AC only, 15 or 20 amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.
NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting.


PRODUCT DIMENSIONS

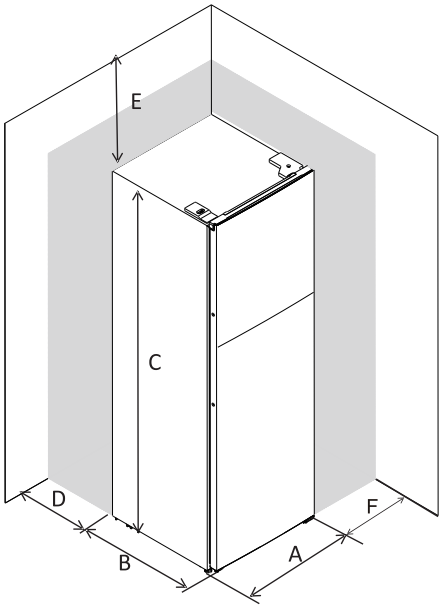

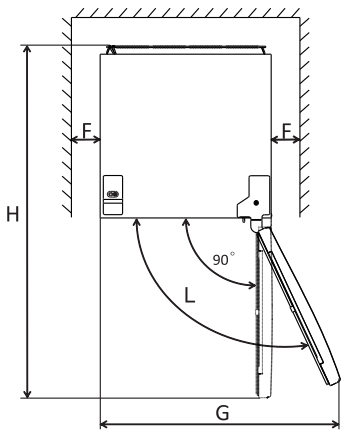

A	B	C	D	E	F	G	H	L
749 mm	740 mm	1691 mm	minimum =50 mm	minimum =30 mm	minimum =30 mm	1275 mm	1229 mm	135°

LOCATION REQUIREMENTS

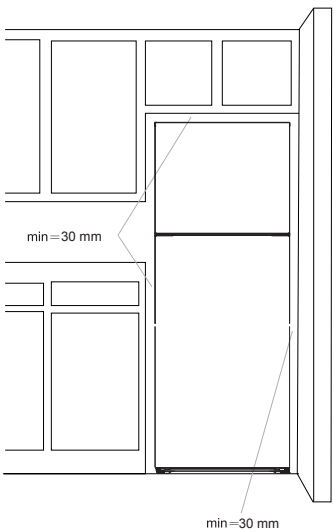

To ensure proper ventilation for your refrigerator, allow for 1.18”(30 mm) of space on each side and at the top. Allow for 2”(50 mm) of space behind the refrigerator.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 61°F (16°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 61°F (16°C) and 100°F(38°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ ©2022 Whirlpool. All rights reserved. Used under license in Canada.
Tous droits réservés. Utilisé sous licence au Canada.
Todos los derechos reservados. Usado en Canadá bajo licencia.