ZEPHYR
ZEPHYRONLINE.COM

ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	200 - 600	200 - 390	200 - 290
Min. - Max. Sones	1 - 6		


*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.




Stainless Steel




Black Stainless Steel

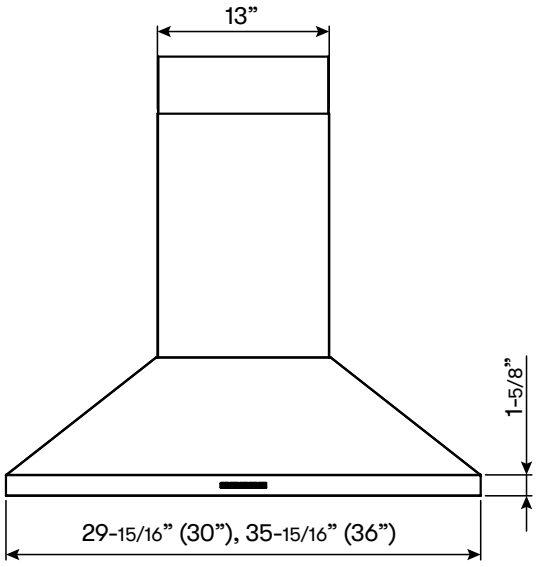

FRONT

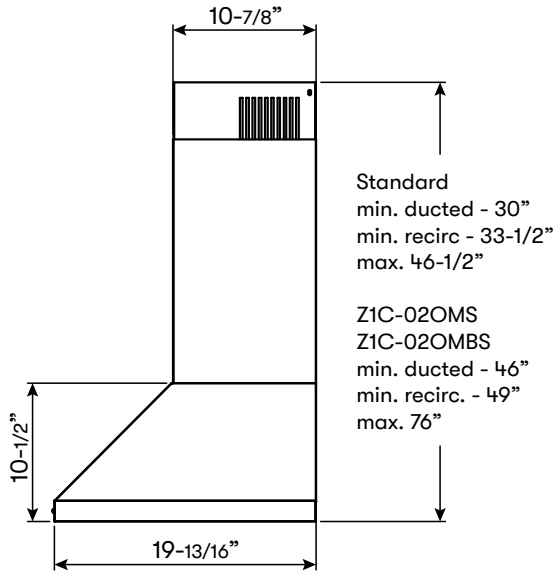

SIDE

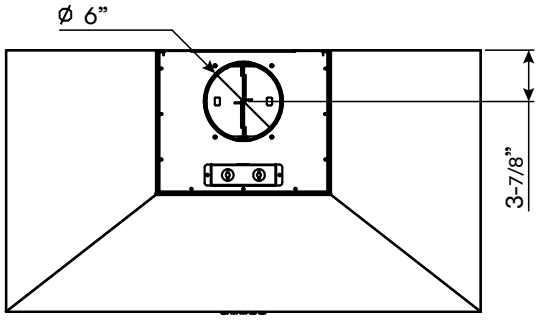

TOP

ZEPHYR

ZEPHYRONLINE.COM

MODEL		
Stainless Steel	ZOM-E30CS	ZOM-E36CS
Black Stainless Steel	ZOM-E30CBS	ZOM-E36CBS
Size	30”	36”
BLOWER PERFORMANCE		
Blower CFM (Min. - Max.)	200 - 600	200 - 600
Sones (Min. - Max.)	1 - 6	1 - 6
ACT 390 CFM (Min. - Max.)	200 - 390	200 - 390
ACT 290 CFM (Min. - Max.)	200 - 290	200 - 290
FEATURES		
ACT™ Technology	390, 290	390, 290
Controls	Electronic Touch	Electronic Touch
Speed Levels	4*	4*
Auto Delay-Off	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2
Dual-Level Lighting	Yes	Yes
Filters	Aluminum Mesh x2	Aluminum Mesh x2
Recirculating Option	Yes	Yes
Duct Cover Extension Option	Yes, Up to 12’ Ceiling	Yes, Up to 12’ Ceiling
ADA Compliant	Yes, w/ remote accessory	Yes, w/ remote accessory
DUCT SPECIFICATIONS		
Vertical Internal Blower	6” Round	6” Round
Horizontal Internal Blower	NA	NA
AC POWER	120V, 60Hz at Max. 4A	120V, 60Hz at Max. 4A
OPTIONAL ACCESSORIES		
Wireless Remote Control	14000005	14000005
Recirculating Kit	ZRC-02OM	ZRC-02OM
Duct Cover Extension	Z1C-02OMS (ss) Z1C-02OMBS (black ss)	Z1C-02OMS (ss) Z1C-02OMBS (black ss)
Hybrid Baffle Filter Kit	Z0F-B003	Z0F-B004**
Stainless Steel Telescopic Backsplash	AK1710	AK1716
Make-Up Air Kit	MUA006A	MUA006A
MOUNTING HEIGHT RANGE* **	24” - 34”	24” - 34”
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor

CEILING HEIGHT		8’	8.5’	9’	9.5’	10’	10.5’	11’	12’
STANDARD DUCT COVER	**Ducted Mounting Height****	24” - 30”	24” - 34”	25.5” - 34”	31.5” - 34”	NA	NA	NA	NA
	Recirc Mounting Height**	24” - 26.5”	24” - 32.5”	25.5” - 34”	31.5” - 34	NA	NA	NA	NA
DUCT COVER EXTENSION	**Ducted Mounting Height****	NA	NA	24” - 26”	24” - 32”	24” - 34”	24” - 34”	24” - 34”	32” - 34”
	Recirc Mounting Height**	NA	NA	NA	24” - 29”	24” - 34”	24” - 34”	24” - 34”	32” - 34”

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.
**Not compatible with ZOM-E36CBS
***Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.

ACT™ **Airflow Control Technology™ (ACT™)** is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

SEP26.0101

c UL us